


LITTLEBOROUGH

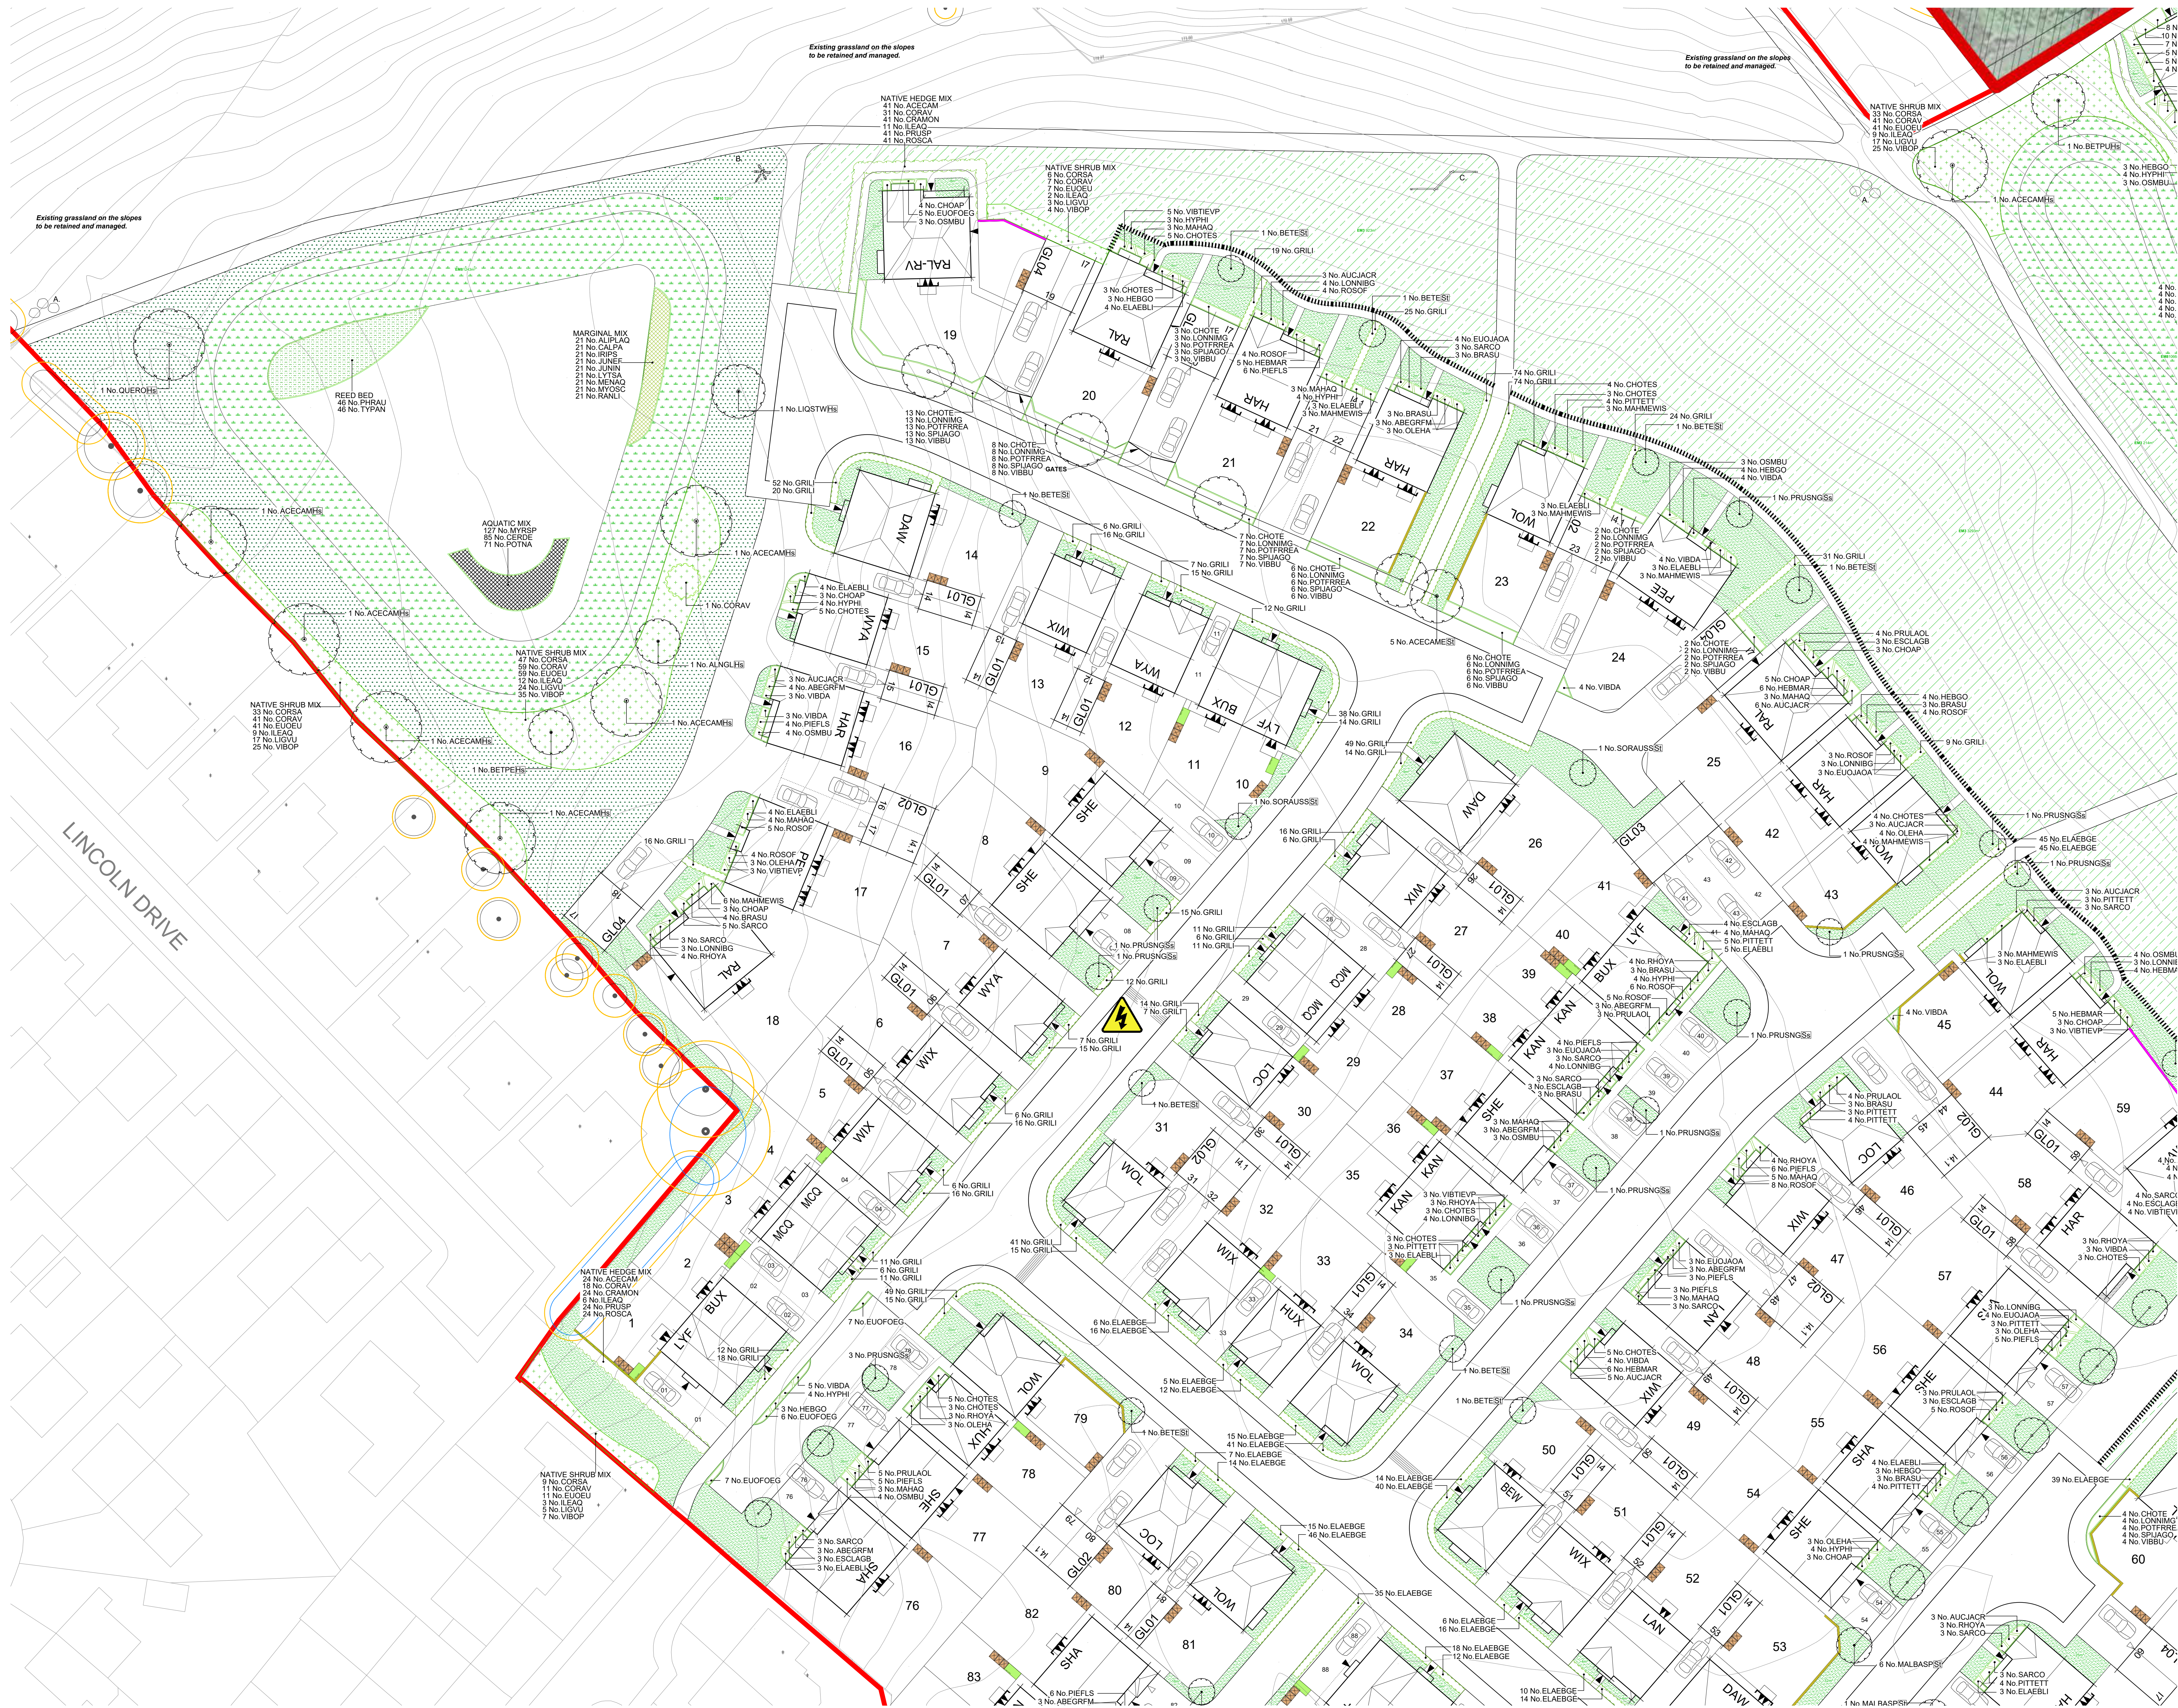


LEGEND

- EXISTING TREES/HEDGES
With Root Protection Area
To be Retained
- PROPOSED TREES
Select Standard Heavy Standard
See Schedule
- ORNAMENTAL HEDGE
See Schedule
- NATIVE HEDGE
See Schedule
- PROPOSED PLANTING
Shrubs/Hedges/Grasses
See Schedule
- TURF
with area (m²)
- AMENITY GRASS AREAS
Wool Turf/Turfgrass Mixture
Emergence E02 soon at 4 g/m²
Keep mown short to 40mm
- WILDOFLOWER MEADOWS
Special General Purpose Meadow Mixture
Emergence E02 soon at 4 g/m²
Mowing prevented to retain and manage where
possible to support rare or scarce
- SEASONAL WETLANDS
Meadow Mixture for Seasonally Wet soils
Emergence E02 soon at 4 g/m²
- TUSsock GRASSLAND
Meadow Mixture for Seasonally Wet soils
Emergence E02 soon at 4 g/m²
- WOODLAND MIX
Woodland Mixture
Emergence E02 soon at 4 g/m²
- NATIVE SHRUB MIX
See Schedule
- SENSORY MIX
See Schedule
- MARGINAL MIX
See Schedule
- AQUATIC MIX
See Schedule
- GRAVEL
40mm of Stone over Membrane
- REED BED
- 0.6m BEKSTONE DWARF WALL
- RECLAIMED STONE WALL
- 1.8m BEKSTONE WALL
- 3 RAIL RANCH FENCE
- RAILINGS
Refer to Fixing Layout
- FEATURE BOULDERS
Cantonian Global Boulders
Mixture of Stone, Water-Resistant
Purity Embedded in the Soil
- DRAGONFLY
As Supplied by Broom Ltd
Ref: BX HMP 250007
Or similar approved
- TRIPLE BALANCE BEAM
As Supplied by Kampan
Ref: NRO004 Or Similar Approved
- SNAKE
As Supplied by Broom Ltd
Ref: BX HMP 250019
Or similar approved
- BALANCE POSTS
As Supplied by Kampan
Ref: NRO021 Or Similar Approved
- STILTS
As Supplied by Kampan
Ref: NRO008 Or Similar Approved
- TRIPLE SOMERSAULT
As Supplied by Kampan
Ref: NRO008 Or Similar Approved

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH
SEPARATE GROUP / SITE SPECIFIC CONSTRUCTION
NOTES AND MATERIALS SPECIFICATION.

DRAWING NOTES
All tree and shrub locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out in Chapter 4 of the NHBC Standards.
The landscape Contractor must ensure that plant material is planted in the locations shown and with NO SUBSTITUTIONS made without consulting the Group Landscape Design Department. It is the Landscape Contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation so that no services are damaged or compromised by tree planting. Any changes to tree positions, species or specifications must be approved by the Group Landscape Design Department. Underground service strips are to be kept free of all plant material. Contractors must comply with all Health and Safety regulations and be aware of project/site specific information including referring to the information set out in the CDM drawings.


SHEET LAYOUT LOCATION PLAN NOT TO SCALE

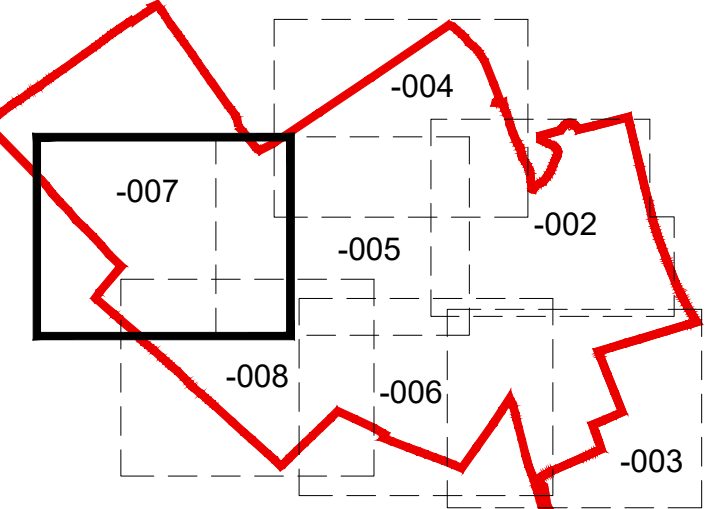

**PLOT NUMBER
SHEET REF.**
SHEET 001 (168-174,254-282,285-309)
SHEET 003 (135-156,159-167,283-284)
SHEET 004 (186-240)
SHEET 005 (58-59,157-158,175-185,241-253)
SHEET 006 (121-134)
SHEET 007 (1-51)
SHEET 008 (52-57,60-120)

CDM LEGEND

- Symbol Brief description of risk
 - Caution overhead / underground services
 - Sewer assessment
 - Trees have protection order in place, guarding required
- NOTES:
Principal contractor to ensure all health and safety procedures are being correctly followed in relation to all temporary works.

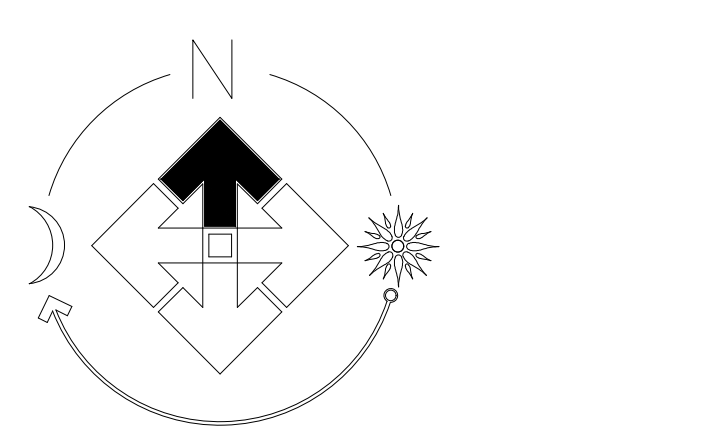

FOR SPECIFICATION, PLANTING DETAILS & SCHEDULE SEE DRAWING NW111-LS-009

Revision	Date
A	09.05.24
B	10.05.24
C	10.04.25
D	10.04.25
E	06.08.25
F	19.08.25
G	24.09.25
H	02.10.25
I	03.10.25

Job:	LITTLEBOROUGH
Title:	Site Landscaping
Scale:	1:250 @A0
Date:	Feb 2024
Drawn:	ED
Checked:	PmJ

THIS DRAWING AND THE BUILDING WORKS DEPICTED ARE THE COPYRIGHT OF J S BLOOR (SERVICES) LIMITED AND MAY NOT BE REPRODUCED OR MISUSED EXCEPT BY WRITTEN PERMISSION. NO LIABILITY WILL BE ACCEPTED FOR AMENDMENTS MADE BY OTHER PERSONS.

BLOOR HOMES
J S BLOOR (SERVICES) LIMITED
ASHBY ROAD, MEASHAM, SWADLINCOTE,
DERBYSHIRE DE12 7JP
TELEPHONE 01530 270100 FACSIMILE 01530 272008

Drawing No:
NW111-LS-007i