

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

Block paving cross section

Edge Restraints (Kerb Stones)
(usually 150 - 250 mm depth)


Edge Course
Contrast Colour Block Paving
(usually 50-80 mm depth)

Block Paving
(usually 50-80 mm depth)

Sand Screed aka Laying Course
Sharp Sand
(40 mm depth)

Sub-Base
Compacted MOT Type-3 Aggregate
(150 mm depth - more if required)

Subgrade / Substrate
Excavated to the sum of the depth
of the block paving, sand screed
and sub-base, plus any fall required
for drainage (60:1 - 80:1 gradient)

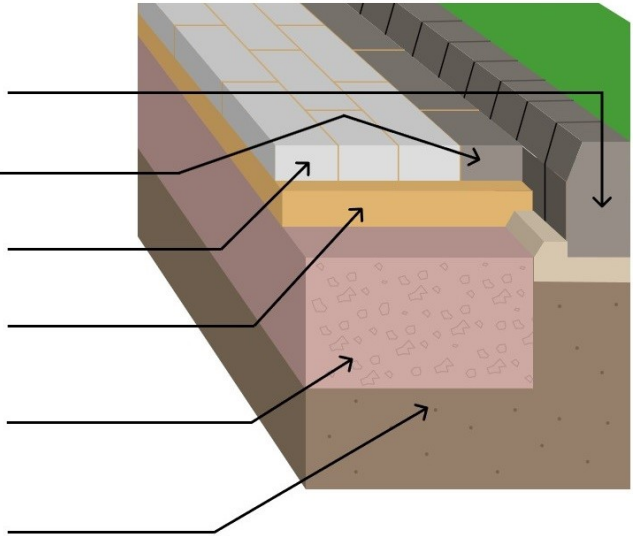

	NAME	DATE	Solid Edge		
DRAWN	chris	06/18/24			
CHECKED			TITLE		
ENG APPR					
MGR APPR					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±X.X° 2 PL ±X.XX 3 PL ±X.XXX			SIZE A4	DWG NO	REV
			FILE NAME: Cross section.dft		
			SCALE:	WEIGHT:	SHEET 1 OF 1