




—SEE NOTE (1).



SCRAP VIEW

IMPORTANT TO TRANSFER ANY COVER LOADS THROUGH TO BACKFILL i.e. CONCRETE TO BE FREE OF ANY VOIDS UNDER G.R.P. TOP FLANGE.

SURROUNDING FLOOR SLAB
SHOULD HAVE AN ADEQUATE
FALL TO ALLOW WASTE WATER
TO RUN INTO SILT TRAP

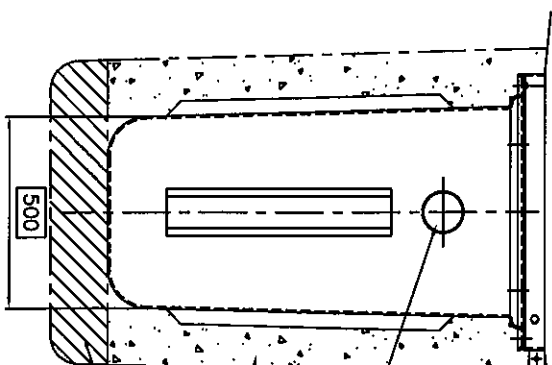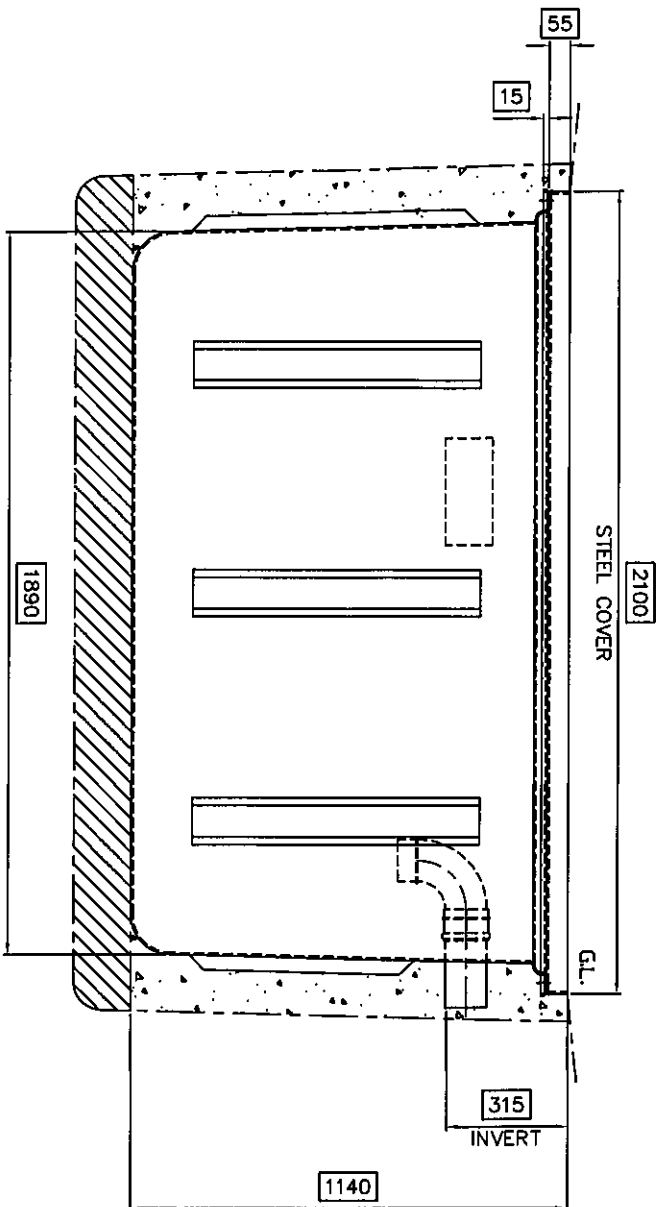

110 (4") UPVC.
OUTLET PIPE

—CONCRETE BACKFILL BY
CLIENT TO SUIT SITE
CONDITIONS

CONCRETE BASE SLAB
CAST BY CLIENT TO
SUIT SITE CONDITIONS.

NOTES:-

- 1.) GALVANISED MESH COVERS,
DESIGNED TO FACTA 'B' LOADING - 5 TONNE SMALL.
- 2.) VOLUMES
TOTAL VOLUME = 1150 litres.
- 3.) TOTAL UNIT WEIGHT = 240kgs (EMPTY).

3	02.06.10	I.C.	C2856	
2	30.06.09	P.T.C.	C2774	
1	10.12.08	J.C.	INITIAL ISSUE	
DATE	FILED	ISSUED	ACQUISITION	

This study is complete and may be re-evaluated or used without written permission of Cargill.

DISPOSABLES: THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

NO COPY PRODUCTION

A

ALL DIMENSIONS ARE IN MILLIMETRES – DO NOT SCALE

rule



Environmental

CAR WASH
SILT TRAP
CST1H (c/w COVER)
CUSTOMER DRAWING

SCALE	1-10
-------	------

D.O. RES.

DSO714P

W