




5No Acrow props to support the primary roof structure.
 Fox folding timber wedges to be used under inclined members,
 fixed into position with screws.
 From first floor to ceiling 3750mm use Acrow Type No4
 Within the ceiling void 1300mm use Acrow Type No0
 Spreader planks to be used at floor and ceiling level.
 Note: assumes the stage has been temporarily removed and a gap
 can be maintained for inserting the new angle frames at first floor
 level.
 Note: Acrow prop maximum length is 4900mm so cannot be used in
 a single length from first floor to the underside of the roof ridge.

Rev A July 2023 – Issued for tender purposes.

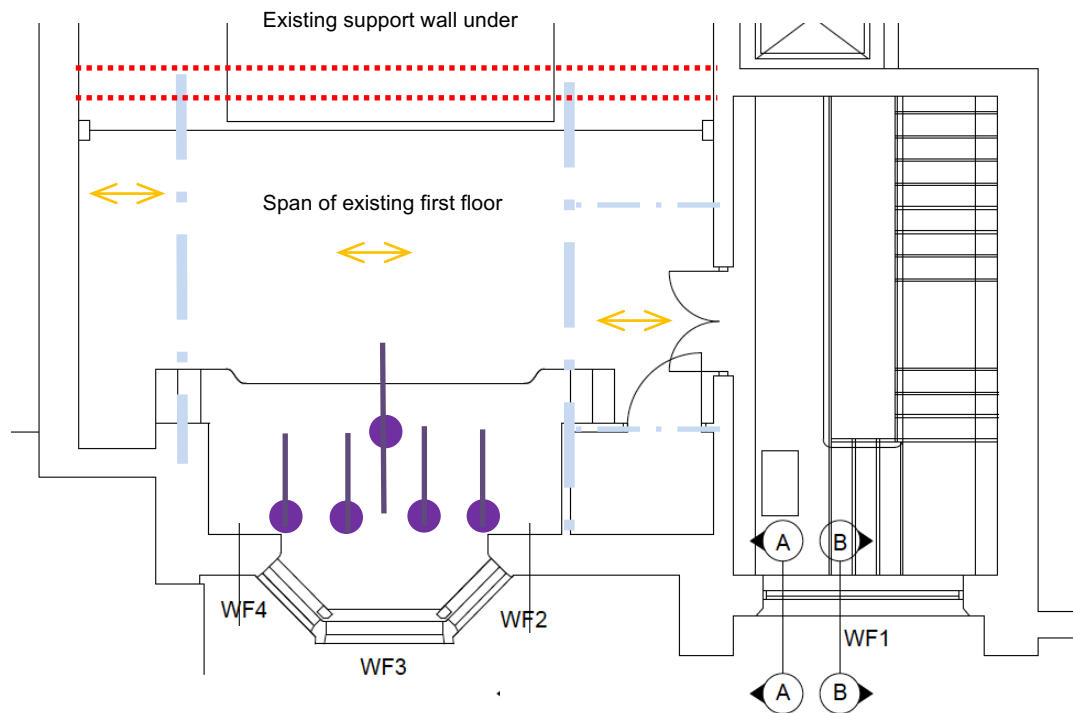

**Blackett-Ord Conservation
Engineering**

5th Floor, Horton House, Exchange Flags, Liverpool, L2 3PF
 Tel: 0151 353 7130 - email: ian@blackett-ordconservation.co.uk

Milnrow Library

Oriel Window Repairs

First Floor Plan – Temporary Prop Sch

Job No: Z59 Date: June 2023 Drg No SK11 Rev A