New re-enforced concrete lintel to inner wall where new opening is formed.

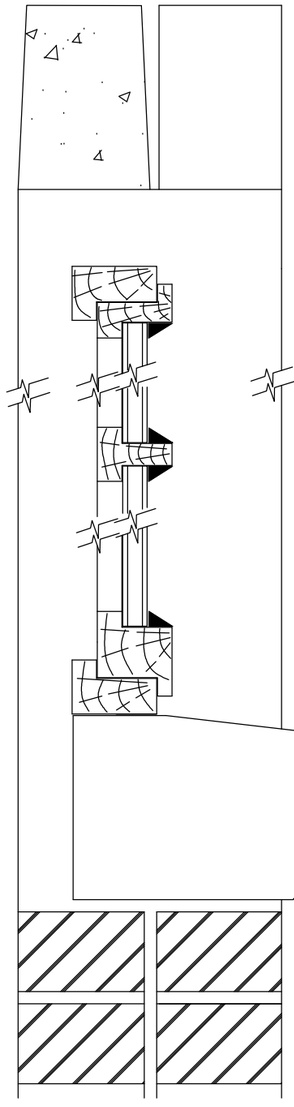

New 100 x 150 cut stone head set flush in brickwork

New sw painted timber windows, outer frame to be 69 x 44 inner frame to be 61 x 44 (bottom rail to be 69 x 44 to take modern stay)
simple triangular timber bead to look like traditional putty glazing.

NOTE:
SIMILAR SECTION SIZES IF IN ALLUMINIUM ALL PAINTED DARK GREY RAL 7021 BLACK GREY.

New 100 x 200mm cut stone cill to protrude 50mm from face of brickwork and to be weathered back to under window frame.

existing 9" brick wall

SECTION THRU' TIMBER WINDOW

SCALE 1:5

BIN STORE

To be made from cedar boards left natural to weather and silver up.
To have verticaly boarded sides with cover strips, a pair of horizontal shiplap boarded doors to front and a anthracite grey tin roof hinged from back for access.
All to be bolted down to a 100mm thick cast concrete slab.



FRONT ELEVATION



SIDE ELEVATION

CYCLE STORE

Construction as bin store



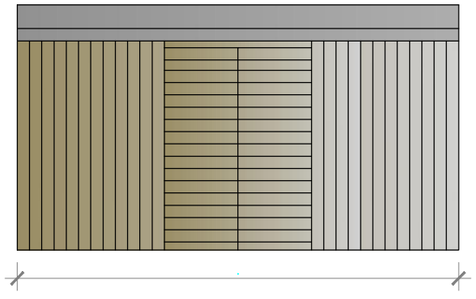

SCALE 1:50