Do not scale this drawing (printed or electronic version).

Contractors must check all dimensions from site

This drawing is copyright and is for use on this site only. This drawing should be read in conjunction with all relevant consultants drawings and specialist subcontractors / supply chain drawings and specifications.

All works to be carried out in accordance with the latest British Standards / Codes of Practice unless specifically directed otherwise in the specification.

Responsibility for the reproduction of this drawing in paper form, or issued in electronic format, lies with the recipient to check that all information has been replicated in full and is correct when comparedto the original paper or electronic image.

Graphical representations of equipment on this drawing have been co-ordinated, but are approximations only. Please refer to the specifications and / or details for actual sizes and / or specific contractor construction information.

Plant Schedule

QTY	UNIT	CODE	PLANT NAME	STOCK	FORM	GIRTH/HEIGHT
Trees						
4	No.	ACE CAM CS	Acer campestre "Streetwise"	RB	STD	16-18cm
24	No.	ALN GLU xhs14	Alnus glutinosa	RB	STD	14-16cm
9	No.	BET PEN 12	Betula pendula	RB	STD	12-14cm
14	No.	PRU AVI xhs14	Prunus avium	RB	STD	14-16cm
3	No.	QUE ROB xhs16	Quercus robur	RB	STD	16-18cm
5	No.	SOR AUC	Sorbus aucuparia	RB	STD	14-16cm

QTY	UNIT	CODE	PLANT NAME	STOCK	SIZE
Hedges					
79	m	F.syl Hedge	Fagus sylvatica	B Trans	60-80cm
316	No.	Plants spaced @ 4/m in a Double Staggered Row			

PERCENT	QTY	UNIT	PLANT NAME	STOCK	SIZE
Hedge Mixes					
26m NATIVE HEDGE MIX 1 planted @ 4/m in a Double Staggered Row					
50%	52	No.	Crataegus monogyna	B Trans	60-80cm
20%	21	No.	Corylus avellana	B Trans	60-80cm
20%	21	No.	Cornus sanguinea	B Trans	60-80cm
5%	5	No.	Ilex aquifolium	C 3L	40-60cm
5%	5	No.	Rosa canina	B Trans	60-80cm
To be planted in species groups of approximately 10.					


PERCENT	QTY	UNIT	PLANT NAME	STOCK	SIZE
Plant Mixes					
503m2 Native Shrub Mix 8 planted @ 3/m2					
30%	453	No.	Crataegus monogyna	B Trans	60-80cm
10%	151	No.	Cornus sanguinea	B Trans	60-80cm
10%	151	No.	Sambucus nigra	B Trans	60-80cm
20%	302	No.	Corylus avellana	B Trans	60-80cm
5%	75	No.	Ilex aquifolium	C 3L	60-80cm
20%	302	No.	Prunus spinosa	B Trans	60-80cm
5%	75	No.	Viburnum opulus	B Trans	60-80cm
Individual varieties to be planted in groups of approximately 3-5.					
26m2 Entrance Shrub Mix planted @ 4/m2					
20%	21	No.	Hebe 'White Gem'	C 3L	20-30cm
20%	21	No.	Hebe pinguifolia 'Pagei'	C 3L	20-30cm
20%	21	No.	Pachysandra terminalis 'Variegata'	C 3L	20-30cm
15%	16	No.	Lavandula angustifolia 'Hidcote'	C 3L	30-40cm
15%	16	No.	Spiraea japonica 'Little Princess'	C 3L	30-40cm
10%	10	No.	Perovskia 'Blue Spire'	C 3L	30-40cm
Individual varieties to be planted in groups of 3, 4 or 5.					
84m2 Entrance Shrub Mix 1 planted @ 4/m2					
20%	67	No.	Ceanothus 'Blue Mound'	C 5L	60-80cm
20%	67	No.	Hebe 'Great Orme'	C 5L	60-80cm
10%	34	No.	Potentilla fruticosa 'Primrose Beauty'	C 5L	60-80cm
10%	34	No.	Philadelphus 'Belle Etoile'	C 5L	60-80cm
20%	67	No.	Prunus laurocerasus 'Otto Luyken'	C 5L	60-80cm
20%	67	No.	Viburnum davidii	C 5L	60-80cm
Individual varieties to be planted in groups of 3, 4 or 5.					

PERCENT	QTY	UNIT	PLANT NAME
Bulb/Wildflower Mixes			
6658m2 EM1 General Purpose meadow mix planted @ 5g/m2			
20%		No.	Wildflower Mix
80%		No.	Grasses Mix
Seeded over prepared ground from Emorsgate Seeds.			
309m2 EM3 Special General Purpose meadow mix planted @ 5g/m2			
20%		No.	Wildflower Mix
80%		No.	Grasses Mix
Seeded over prepared ground from Emorsgate Seeds.			
1364m2 WFG8 Hedgerows and Shaded Areas meadow mix planted @ 5g/m2			
20%		No.	Wildflower Mix
80%		No.	Grasses Mix
Seeded over prepared ground from Germianl Seeds.			

Notes and Abbreviations

B	=	Bare root (bagged).
C	=	Container (or pot) grown, followed by size of the container (or pot).
FORM	=	Shape of tree as supplied by the nursery.
QTY	=	Quantity
RB	=	Rootballed (balled and wrapped).
SIZE	=	Height or Spread of juvenile plant.
Std	=	(clear stem) Standard.
STOCK	=	Root condition/protection method eg Bare root.
Trans	=	Transplant (or undercut seedling).

- Refer to specification for further information.
- All plants to be completely hardened off
- Substitutions to be agreed with Landscape Architect.

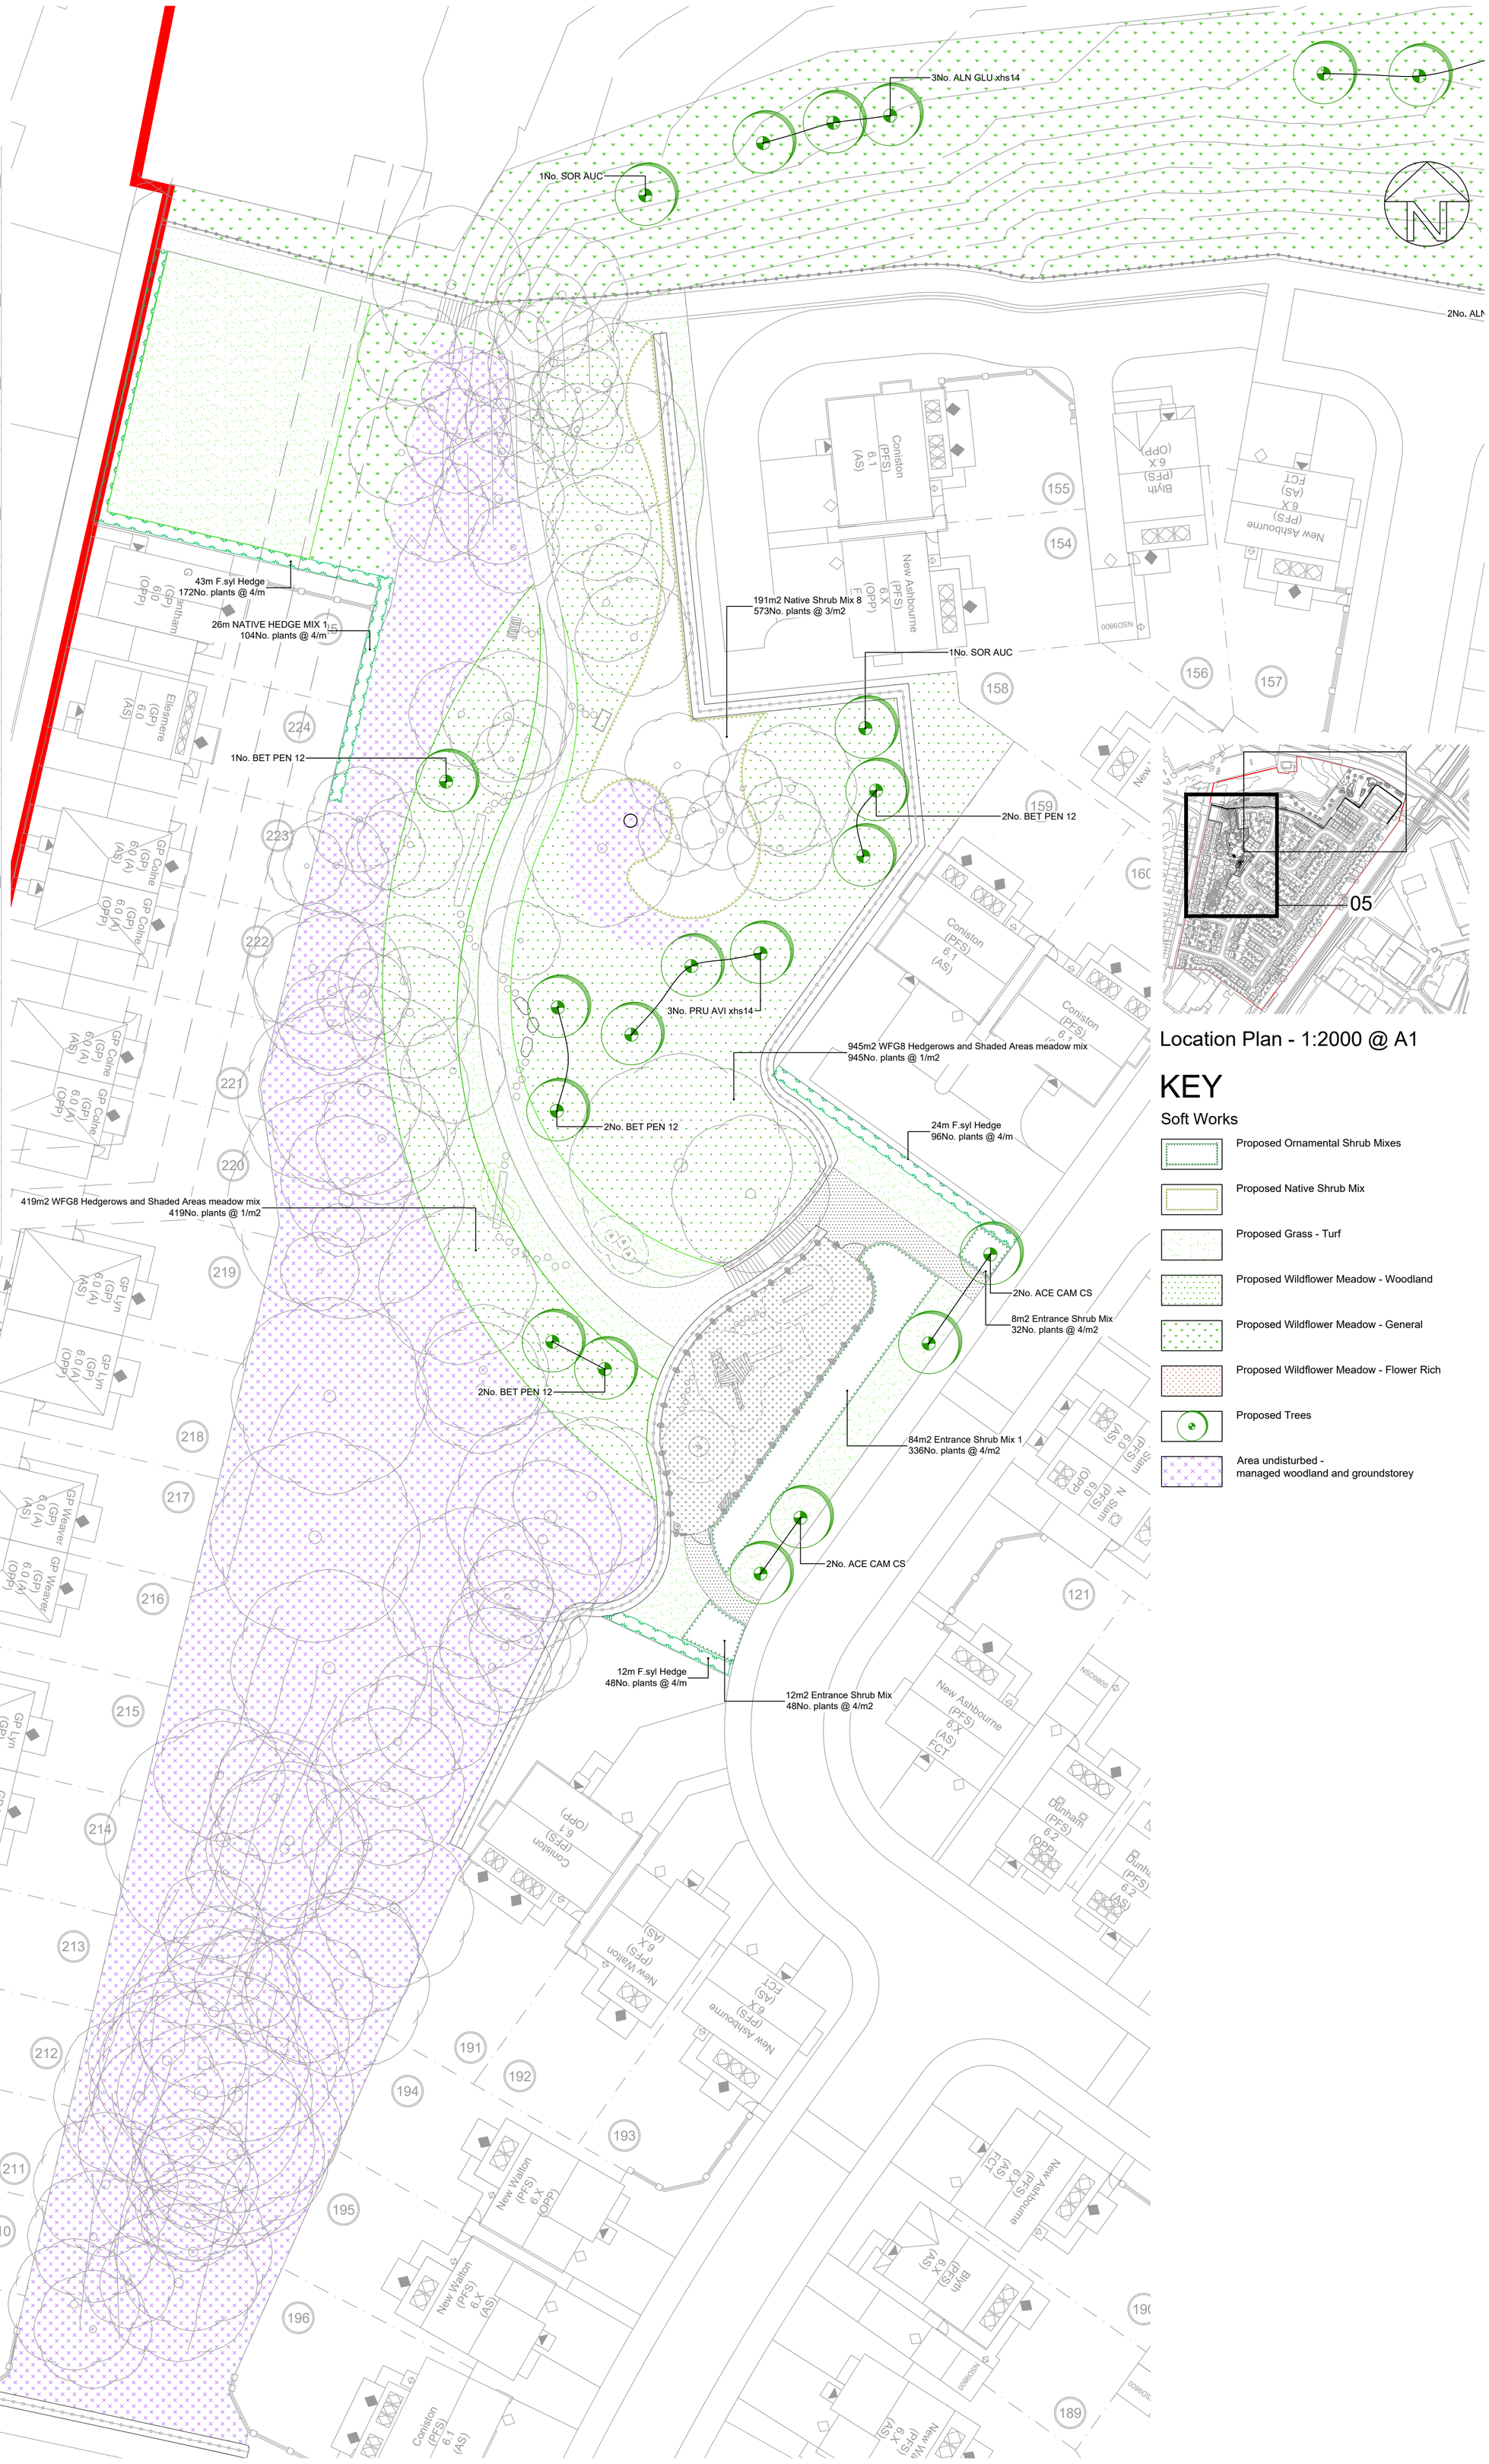

Location Plan - 1:2000 @ A1

KEY

Soft Works

- Proposed Ornamental Shrub Mixes
- Proposed Native Shrub Mix
- Proposed Grass - Turf
- Proposed Wildflower Meadow - Woodland
- Proposed Wildflower Meadow - General
- Proposed Wildflower Meadow - Flower Rich
- Proposed Trees
- Area undisturbed - managed woodland and groundstorey

Project: Royle Works, Rochdale	**Client:** Partnerships North Countryside Properties	**Status:** Planning		**Drawn:** ME	**Checked:** MT
Title: Soft Landscape Plan - POS Sheet 1 of 2	**Drawing No:** UG_11969_LAN_SL_DRW_05	**Scale @ A1:** 1:250	**Date:** 28/01/19	**Approved:** MK	**Revision:** P03

URBAN GREEN

Ground Floor, The Tower, Deva City Office Park, Trinity Way, Manchester M3 7BF
T: 0161 312 3131 W: urbangreen-space.co.uk