

EuroSeries® (ESR)

RSC-01/RSC-02 MODEL ESR35514.

- Cowl & base moulded from recyclable polymeric material
- All sizes resistant to UV light
- Sizes 250 to 1000 dia are protected to IP54
- Optional backdraught shutters and bird guard (250-630mm)
- All models speed controllable
- Motor Insulation Class F, -40°C to +70°C operating temperature
- Reversible for supply or extract units
- Thermal overload for motor protection
- Performance tested to BS848 part 1: 1980
- Designed for Data Centre and Warehouse cooling



A range of extract axial blade industrial roof fans incorporating the EuroSeries® ESP axial plate fan, featuring a single shot die cast aluminium blade & external rotor motor design.

Cowl and roof mounting base are moulded from specially formulated recyclable polymeric materials, which are high impact resistant and provide a rigid profile against strong winds and resistance to UV light. Standard colour BS00A05

EuroSeries® ESR units are suitable for flat or inclined roofs (max. angle 30°) and are designed for either kerb or purlin box mounting.

The EuroSeries® ESR range is available in eleven sizes with the extract performances up to 10.88m³/s, with pressure characteristics of up to 300Pa. All units are designed for & fully speed controllable.

Air Operated Shutters & Bird Guards

The shutters fits beneath the cowl using fitting provided. Shutters should not be used when the fan performance is below 30% of maximum and the hinge should point up the roof incline.

The standard shutters for sizes 800 & 1000mm must not be used with 4 & 6 pole unit. Please enquire for special metal shutters. Bird Guards are manufactured to fit neatly between the roof cowl and the base.

Impellers

All sizes are supplied with cast aluminium impellers, ensuring performance when working against outdoor conditions and abrasive airflow. All fans are reversible for Intake (approx 30% reduction in performance). Backdraught shutters should not be used when operated as an intake fan.

Motors

External rotor motors are specially designed and styled for this range of fan. Ball bearings are greased for life. Rotors are dynamically balanced to ISO 1940. Sizes 250-1000mm, motors are protected to IP54, against

dust and moisture complying with BS EN 60529:1992. They are ribbed aluminium body castings for efficient cooling. Motor insulation is Class 'F' (from -40°C to +70°C).

Electrical

Single phase 220-240V 50Hz. Capacitor start and run. Three phase 380-415V 50Hz. An IP54 terminal box is supplied with most models with 20mm and PGII entry. All motors are fitted with thermal overload protection which should be wired into all controller circuits and into starter contactors. Models are available with either 2,4, 6 & 8 pole motors.

Terminal Box

Are to IP54, as standard, protected against dust and water from any angle allowing outside applications.


Performance

The fan performance is in accordance with tests to BS848 Part 1 1980.

Sound Levels


Fan sound levels, measured in a reverberant chamber in accordance with BS848 Part 2 1985. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2×10^{-5} Pa (20 micro-Pascal). The sound power level spectra figures are dB with reference level of 10^{-12} Watts (1 pico-watt). To ensure minimum noise levels during speed control, an auto transformer speed control is recommended.

Fan Dimensions (mm)

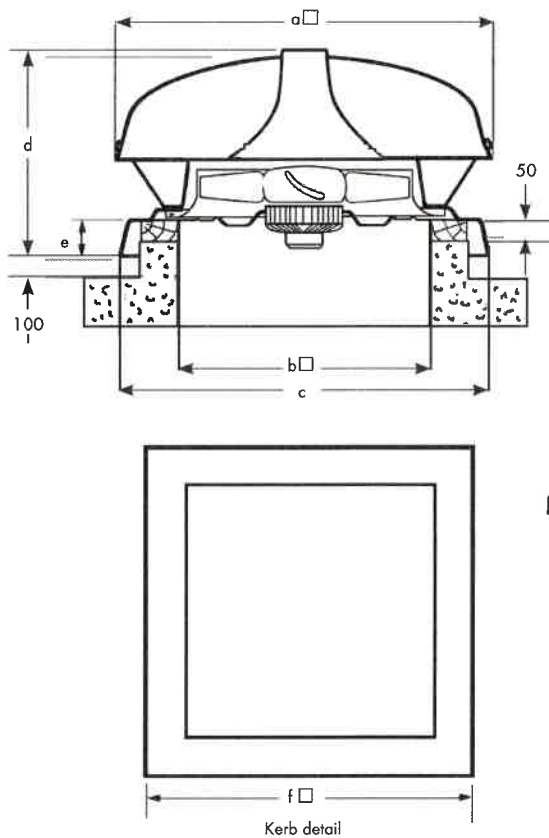

Size	a	b	c	d	e	f	kg Max
250	700	475	737	411	97	675	13.25
315	700	475	737	411	97	675	16.3
355	700	475	737	411	97	675	16.3
400	800	575	830	466	97	775	18.4
450	800	575	830	466	97	775	20.3
500	950	715	1000	579	100	915	35.5
560	950	715	1000	579	100	915	35.5
630	1230	840	1100	731	105	1040	62
710	1230	840	1100	731	105	1040	62
800	1420	870	1190	731	105	1070	78
1000	1680	1070	1455	795	131	1270	134

Purlin Box (mm)

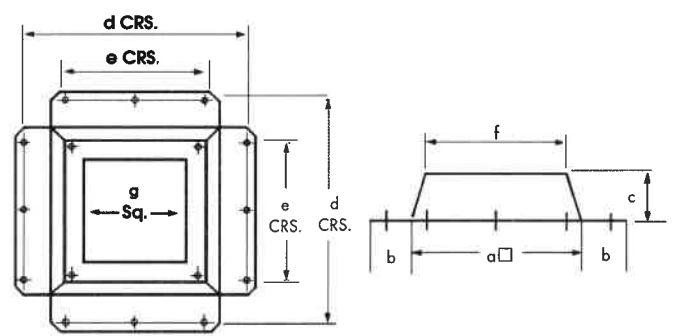


Size	a	b	c	d	e	f	g
250	625	90	240	765	400	590	460
315	625	90	240	765	400	590	460
355	625	90	240	765	400	590	460
400	725	90	240	865	500	705	565
450	725	90	240	865	500	705	565
500	890	70	250	990	650	850	640
560	890	70	250	990	650	870	700
630	1030	75	250	1140	760	985	775
710	1030	75	250	1140	760	985	840
800	980	37	267	1016	406	980	880
1000	1180	76	279	1294	508	1180	1080


RSC-01
RSC-02

Performance Guide

250 to 450 dia. - 1 Phase - 2 & 4 Pole

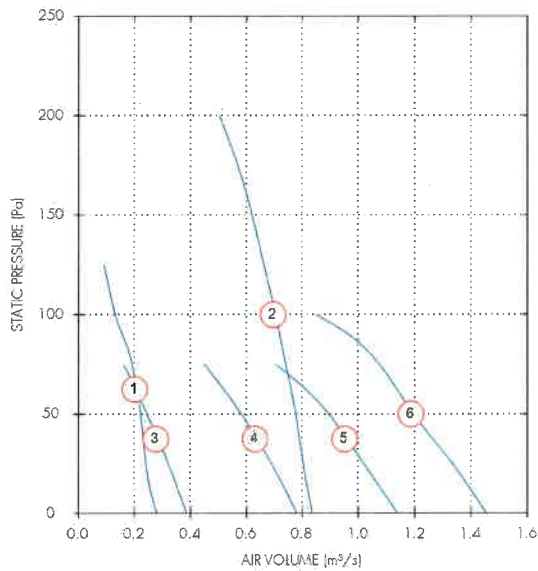

500 to 630 dia. - 1 Phase - 4 Pole

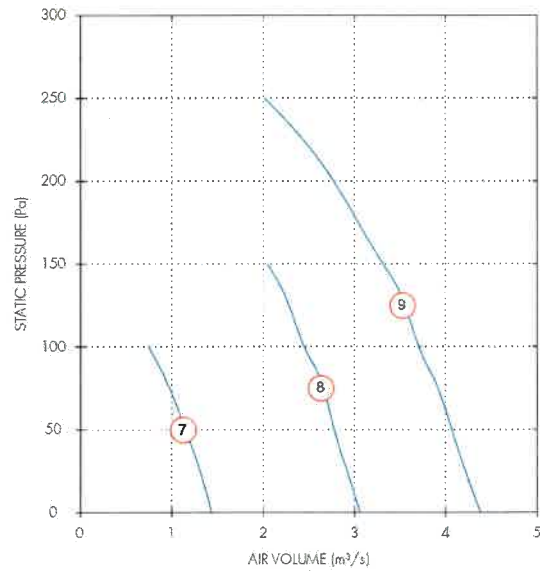

Dia.	Motor Phase	Stock Ref	Poles	r.p.m	IP Rating	Curve Ref.	0	50	100	m³/s @ Pa					Motor kW	S.C. Amps	F.L.C. Amps	dB(A) @ 3m
250	1	ESR25012	2	2440	IP44	1	0.28	0.22	0.13						0.12	1.15	0.54	59
315	1	ESR31512	2	2690	IP54	2	0.84	0.78	0.7	0.62	0.5				0.56	7.2	2.4	64
315	1	ESR31514	4	1300	IP54	3	0.38	0.24							0.15	1.38	0.7	50
355	1	ESR35514	4	1330	IP54	4	0.78	0.58							0.19	1.45	0.84	53
400	1	ESR40014	4	1350	IP54	5	1.14	0.89							0.29	2.4	1.45	56
450	1	ESR45014	4	1370	IP54	6	1.45	1.19	0.85						0.36	3.6	1.6	61
500	1	ESR50014	4	1290	IP54	7	1.43	1.15	0.75						0.51	4.3	2.3	55
560	1	ESR56014	4	1320	IP54	8	3.05	2.77	2.44	2.04					1.35	21	6	63
630	1	ESR63014	4	1320	IP54	9	4.38	4.06	3.7	3.31	2.76	2.01			2.2	28	9.9	70

ESR25012, ESR31512 & ESR25014 not suitable for reverse airflow.

Sound Power Level Spectra dB (ref 10⁻¹² Watts)

Dia.	Motor Phase	Stock Ref	Poles	Spectrum	63	125	250	500	1k	2k	4k	8k	dB(A) @ 3m
250	1	ESR25012	2	Inlet	69	70	76	76	70	70	67	59	57
250	1	ESR25012	2	Outlet	69	70	76	76	70	70	67	59	57
315	1	ESR31512	2	Inlet	69	73	79	74	74	76	73	66	61
315	1	ESR31512	2	Outlet	69	73	79	74	74	76	73	66	61
315	1	ESR31514	4	Inlet	70	68	66	61	60	62	58	51	47
315	1	ESR31514	4	Outlet	70	68	66	61	60	62	58	51	47
355	1	ESR35514	4	Inlet	65	70	67	65	64	64	62	55	50
355	1	ESR35514	4	Outlet	65	70	67	65	64	64	62	55	50
400	1	ESR40014	4	Inlet	70	72	67	66	65	65	64	56	51
400	1	ESR40014	4	Outlet	70	72	67	66	65	65	64	56	51
450	1	ESR45014	4	Inlet	69	76	73	72	70	71	70	62	57
450	1	ESR45014	4	Outlet	69	76	73	72	70	71	70	62	57
500	1	ESR50014	4	Inlet	65	75	69	70	70	71	69	62	56
500	1	ESR50014	4	Outlet	65	75	69	70	70	71	69	62	56
560	1	ESR56014	4	Inlet	100	90	89	84	82	79	75	68	67
560	1	ESR56014	4	Outlet	100	90	89	84	82	79	75	68	67
630	1	ESR63014	4	Inlet	82	86	79	79	80	78	75	70	64
630	1	ESR63014	4	Outlet	82	86	79	79	80	78	75	70	64