
SCALE WITH CAUTION AS DISTORTION CAN OCCUR

0 1 2 3 4 5 6 7 8 9 10cm

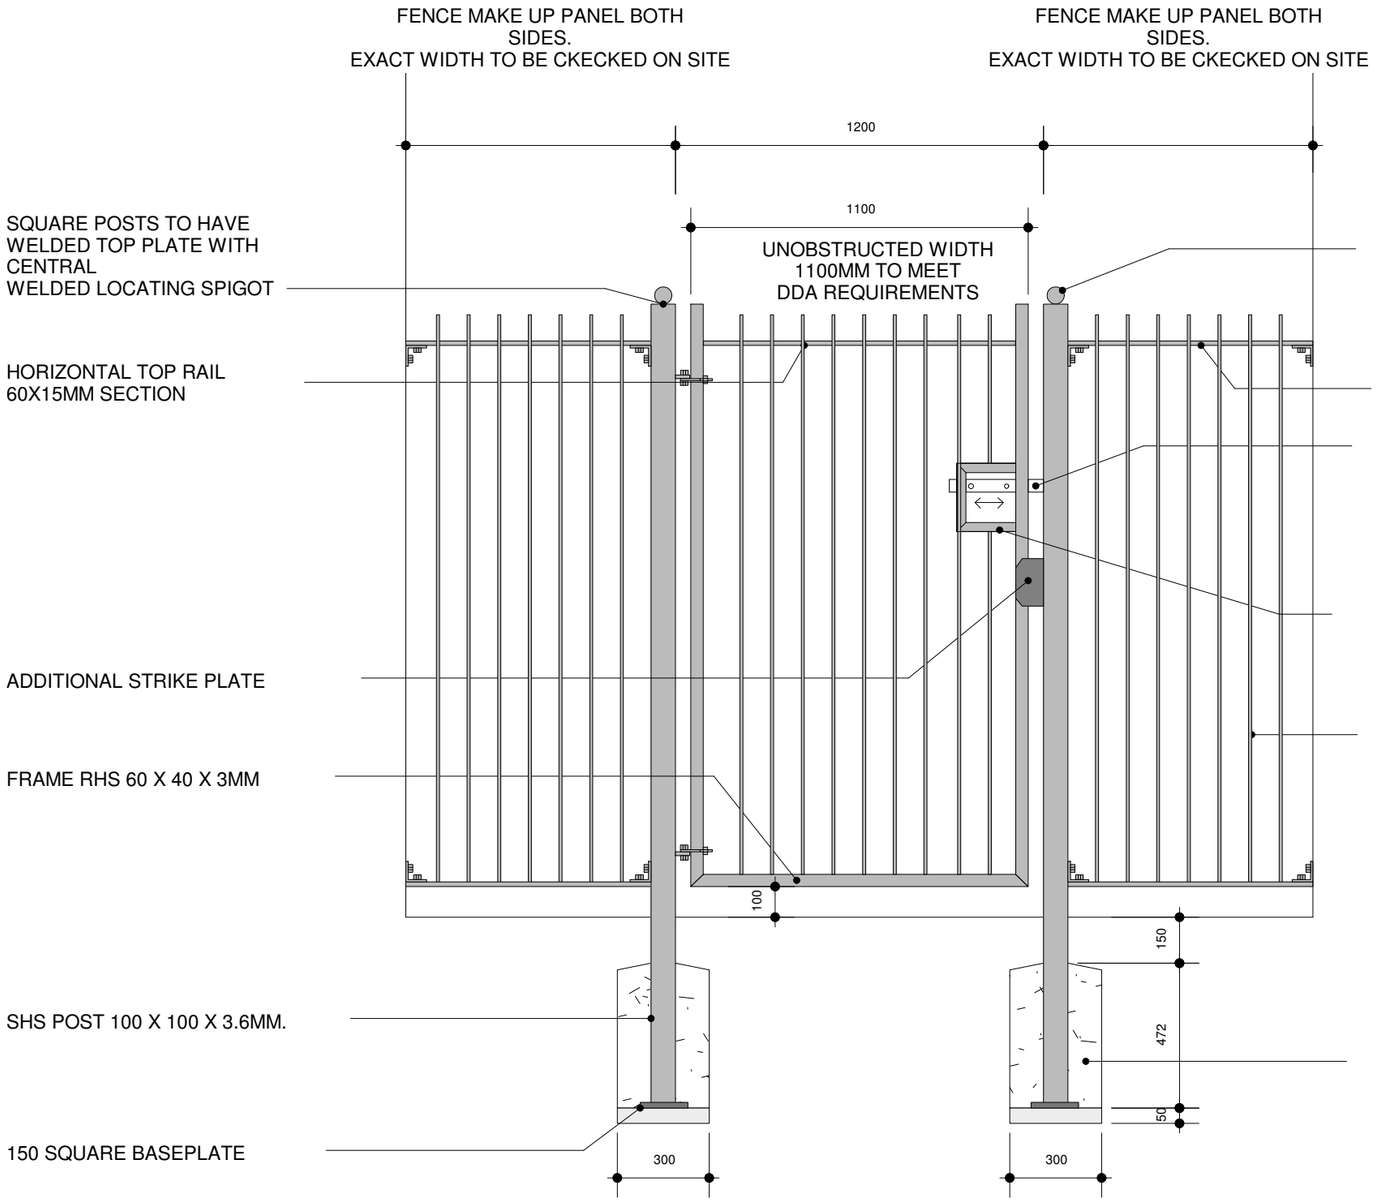

SOLID MILD STEEL BALL
100MM DIAM.

HORIZONTAL TOP RAIL
60X15MM SECTION

HORIZONTAL SLIDING BOLT
60X20MM SECTION THROUGH sleaves on
FRAME WITH WELDED 10MM CIRCULAR HANDLE
AND DRILLED HOLE FOR DISC LOCK

SQUARE SECTION WELDED TO FRAME AND BARS
WITH BOLT SLEAVES FOR SLIDING BOLT.
ALL WELD FIXED.

VERTICAL BARS 20MM DIAM. AT 120MM CENTRES

FOUNDATIONS ALL C20P CONCRETE
ON 100 MIN. HARDCORE

VERTICAL BARS 20MM DIAM.
ALL METALWORK AND FITTINGS TO BE HOT DIPPED
GALVANISED MILD STEEL
METALWORK FINISH TO BE POWDERCOATED TO RAL
9005 BLACK
FOUNDATIONS ALL C20P CONCRETE
ON 100 MIN. HARDCORE
ADJUSTABLE HINGES WITH TAMPER PROOF BOLTS

SQUIRE DCL1 DISCUS PADLOCK
HARDENED STEEL SHACKLE
STAINLESS STEEL LOCK BODY
ANTI DRILL PLATE

Revision

Rev	Date

ROCHDALE METROPOLITAN BOROUGH COUNCIL

ECONOMY & ENVIRONMENT.
Director: M. Widdup

PROPERTY SERVICES.
Manager: D. Bowler

Project: Community Safety Alley Gating

Title: 2m Single Gate & Fence

Drawn:	Check'd & Approv'd:	Safety Audit Check
PW		

Scale:	Date:
As indicated @ A3	6/07/16.

Dwg No.:

A1

2002788