

PLOT FRONTAGE PLANT SCHEDULES:

PLOT FRONTAGE SPECIMEN TREES						
CODE	SPECIES	NUMBER	HEIGHT	GIRTH	CLEAR STEM	ROOT
AC	Acer Campestre	18	350-425cm	12-14cm	2.1M	B
AG	Alnus Glutinosa	20	350-425cm	12-14cm	2.1M	B
PC	Pyrus chanticleer	15	400-450cm	14-16cm	2.1M	RB
PA	Prunus Amanogawa	3	400-450cm	14-16cm	2.1M	B
QR	Quercus Robur	9	350-425cm	12-14cm	2.1M	B
SA	Sorbus aucuparia	9	350-425cm	12-14cm	2.1M	B

AMENITY SHRUB PLANTING	NUMBER	HEIGHT	DENSITY	ROOT	SIZE
Aucuba Japonica crontonifolia	580	40-60cm	3/M ²	POT	3L
Ceanothus thyrsiflorus repens	648	25-30cm	3/M ²	POT	3L
Choisya dewitteana aztec gold	740	25-30cm	3/M ²	POT	3L
Euonymus fortunei emerald and gold	268	25-30cm	3/M ²	POT	2L
Pieris japonica Little Heath	307	30-40cm	3/M ²	POT	5L
Pittosporum tenuifolium I Patterson	251	30-40cm	3/M ²	POT	5L
Skimmia japonica	601	30-40cm	3/M ²	POT	2L
Viburnum Davidii	276	30-40cm	3/M ²	POT	5L
Weigela Florida Folis Purpureis	656	40-60cm	3/M ²	POT	3L

ORNAMENTAL HEDGE TYPE 1	ROOT	HEIGHT	DENSITY/LIN M		NUMBER
Buxus sempervirens	3L POT	30-40cm	4		3072
Total Length on Site (M)	768				

ORNAMENTAL HEDGE TYPE 2	ROOT	HEIGHT	DENSITY/LIN M		NUMBER
Grisselinia littoralis	3L POT	40-60cmcm	3		1278
Total Length on Site (M)	426				

PUBLIC OPEN SPACE PLANT SCHEDULES:

SPECIMEN NATIVE TREES TO POS							
CODE	SPECIES	GRADE	ROOT COND.	HEIGHT	NOTES	NUMBER	
AG	Alnus glutinosa	16-18CM GIRTH EXTRA HEAVY STANDARD	ROOTBALLED	450/550CM	1.8M CLEAR STEM DOUBLE STAKED AND TIED	34	
BP	Betula pubescens	16-18CM GIRTH EXTRA HEAVY STANDARD	ROOTBALLED	450/550CM	1.8M CLEAR STEM DOUBLE STAKED AND TIED	17	
FS	Fagus sylvatica	16-18CM GIRTH EXTRA HEAVY STANDARD	ROOTBALLED	450/550CM	1.8M CLEAR STEM DOUBLE STAKED AND TIED	5	
PA	Prunus avium	16-18CM GIRTH EXTRA HEAVY STANDARD	ROOTBALLED	450/550CM	1.8M CLEAR STEM DOUBLE STAKED AND TIED	18	
QR	Quercus robur	16-18CM GIRTH EXTRA HEAVY STANDARD	ROOTBALLED	450/550CM	1.8M CLEAR STEM DOUBLE STAKED AND TIED	6	
TC	Tillia cordata	16-18CM GIRTH EXTRA HEAVY STANDARD	ROOTBALLED	450/550CM	1.8M CLEAR STEM DOUBLE STAKED AND TIED	60	

NATIVE HEDGE MIX - H3					
Total Hedge Length On Site (M)	Nursery Grade	Height	Total No. Plants		
514			2570	% Mix	No. Of Plants
Major Species					
Crataegus monogyna	Bareroot 1+2 Transplant	1.2-1.5m	45		1157
Prunus spinosa	Bareroot 1+2 Transplant	1.2-1.5m	25		643
Corylus avellana	Bareroot 1+2 Transplant	1.2-1.5m	10		257
Ilex aquifolium	3L Pot	0.6-0.8m	10		257
Minor Species					
Prunus padus	Bareroot 1+2 Transplant	1.2-1.5m	5		129
Rosa canina	Bareroot 1+2 Transplant	1.2-1.5m	5		129

Planted at 5 plants/m in double staggered row.


NATIVE SCRUB MIX				
TOTAL AREA	Nursery Grade	Height	TOTAL	
14360			14360	
Planted on a 1m Grid Staggered			% MIX	NUMBERS
Betula pubescens	Bareroot 1+1 Transplant	60/80cm	15	2154
Cornus sanguinea	Bareroot 1+1 Transplant	60/80cm	10	1436
Viburnum opulus	Bareroot 1+1 Transplant	60/80cm	10	1436
Prunus spinosa	Bareroot 1+1 Transplant	60/80cm	25	3590
Corylus avellana	Bareroot 1+1 Transplant	60/80cm	10	1436
Crataegus monogyna	Bareroot 1+1 Transplant	60/80cm	25	3590
Sorbus aucuparia	Bareroot 1+1 Transplant	60/80cm	5	718
			100	

NATIVE WOODLAND MIX				
TOTAL AREA	Nursery Grade	Height	TOTAL	
4680			4680	
Planted on a 1m Grid Staggered			% MIX	NUMBERS
CANOPY LAYER				
Alnus glutinosa	Bareroot 1+1 Transplant	60/80cm	10	468
Fagus sylvatica	Bareroot 1+1 Transplant	60/80cm	10	468
Betula pendula	Bareroot 1+1 Transplant	60/80cm	10	468
Sorbus aucuparia	Bareroot 1+1 Transplant	60/80cm	10	468
Carpinus betulus	Bareroot 1+1 Transplant	60/80cm	10	468
Quercus robur	Bareroot 1+1 Transplant	60/80cm	20	936
UNDERSTOREY				
Euonymus europeus	Bareroot 1+1 Transplant	40/60cm	2.5	117
Viburnum opulus	Bareroot 1+1 Transplant	60/80cm	2.5	117
Prunus spinosa	Bareroot 1+1 Transplant	60/80cm	5	234
Corylus avellana	Bareroot 1+1 Transplant	60/80cm	10	468
Crataegus monogyna	Bareroot 1+1 Transplant	60/80cm	10	468

PEATLAND PLANT MIX:

SPECIES	ROOT CONDITION	DENSITY	% MIX	NUMBERS
Calluna vulgaris	WILDFLOWER PLUG	1 M CENTRES	20	460
Eriophorum angustifolium	9CM POT	1 M CENTRES	20	460
Juncus effusus	WILDFLOWER PLUG	1 M CENTRES	20	460
Sphagnum capillifolium	WILDFLOWER PLUG	1 M CENTRES	20	460
Sphagnum palustre	WILDFLOWER PLUG	1 M CENTRES	20	460
TOTAL AREA ON SITE	2300	M ²	TOTAL PLANTS	2300

PLANTING PLAN SHEET LAYOUT:

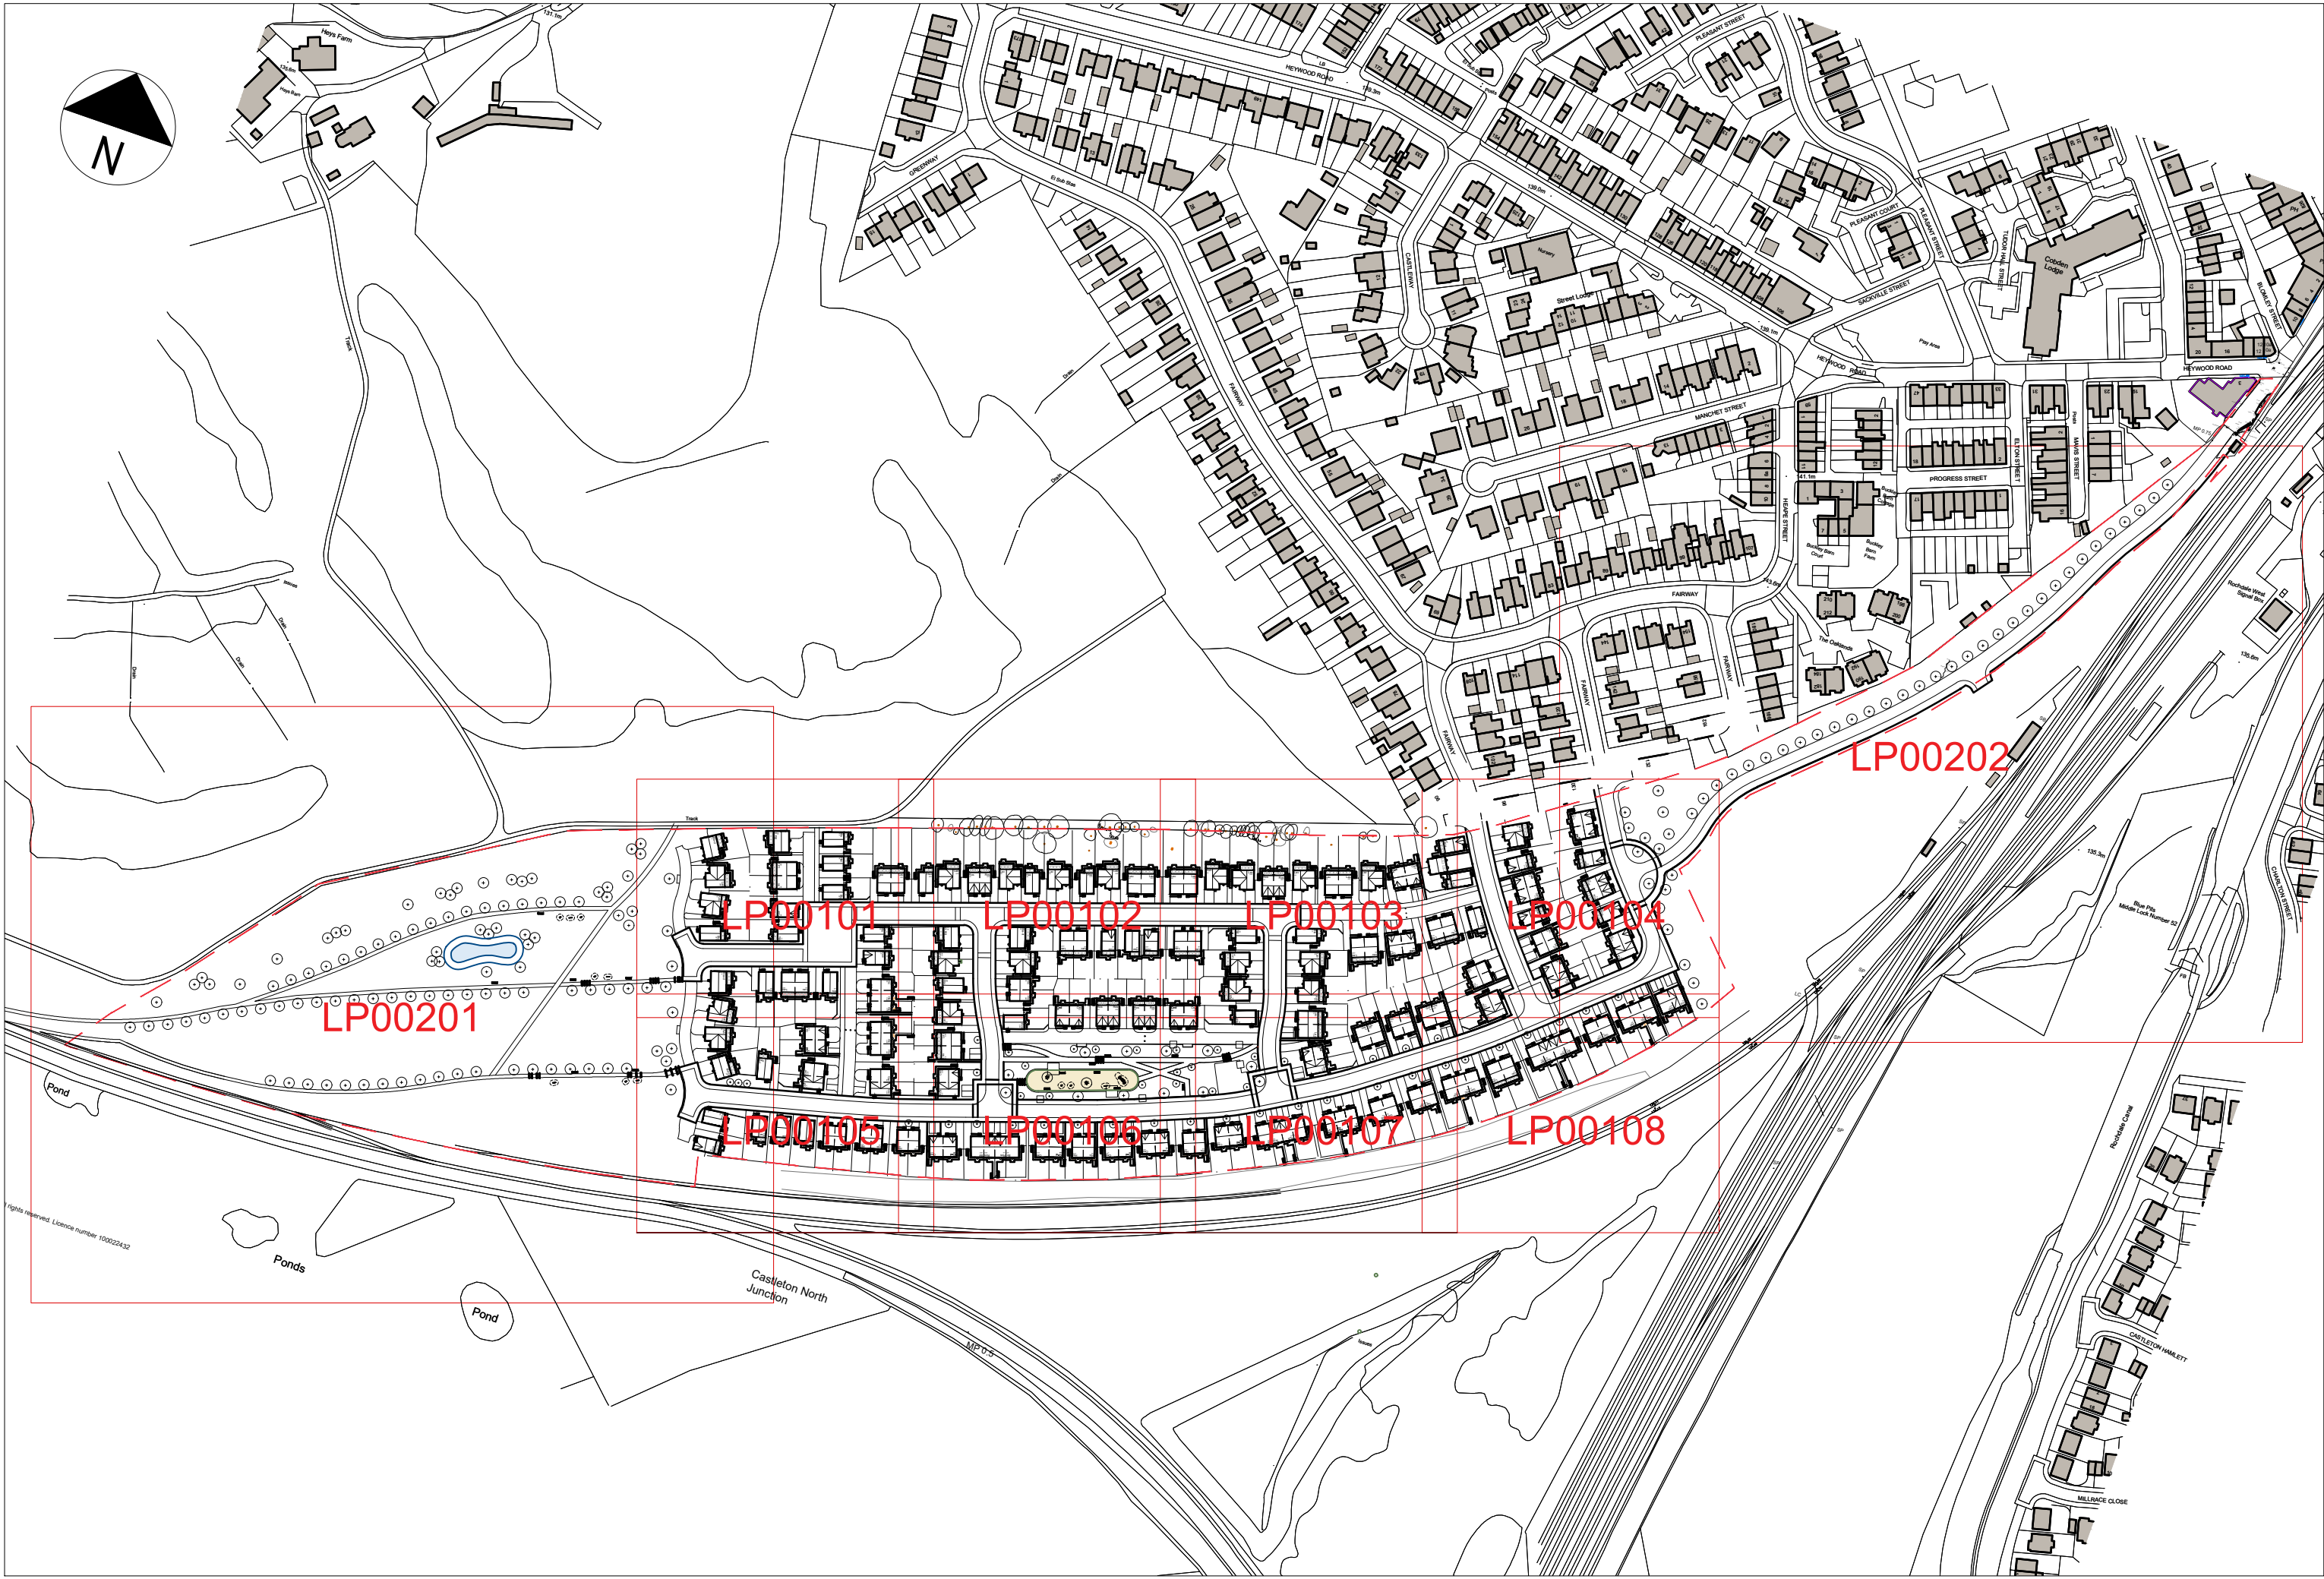

Squareyard

Landscape Architecture - Urban Design - Masterplanning

Email - studio@yd2.co.uk
Web - www.yd2.co.uk
Tel - 07514 281 452

Address:
Suite 10 - Hardman Business Centre,
New Hall Hey Road,
Rossendale

GENERAL NOTES:

- DIMENSIONS GOVERN
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE ON THE DRAWINGS
- ALL DIMENSIONS SHALL BE VERIFIED ON SITE PRIOR TO ANY CONSTRUCTION
- YD2 SHALL BE NOTIFIED OF ANY DISCREPANCIES

DRAWING NOTES:

(-)	FIRST ISSUE - ISSUED FOR PLANNING APPLICATION	MG	AV	01/07/2024
REV	DESCRIPTION	DRAWN	CHECKED	DATE

PROJECT TITLE

CASTLETON SIDINGS
ROCHDALE

DRAWING TITLE

SITEWIDE PLANTING SCHEDULES

PROJECT NUMBER

YD2_22_015

DRAWING No.

YD2_CS_LP00100

SCALE

@ A1
NTS

DATE

JUN 2024

REVISION

(-)