


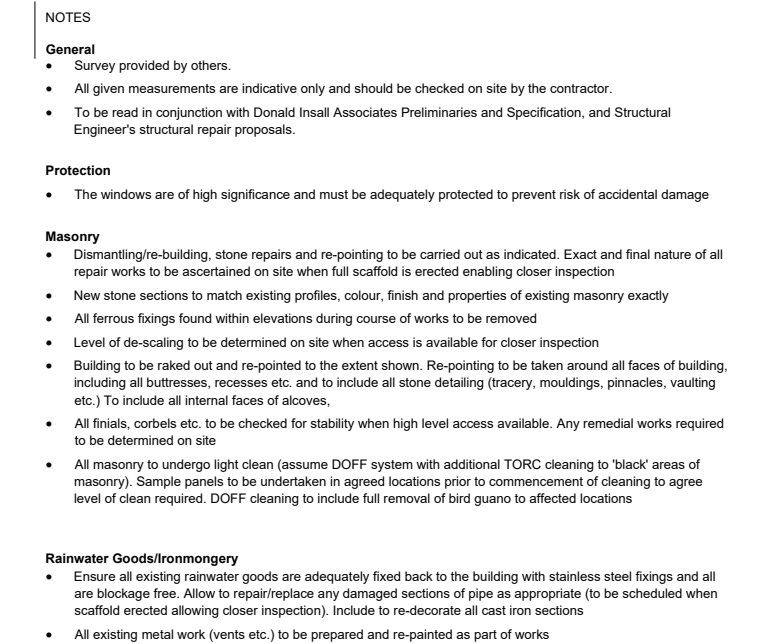

	Cut out decayed / damaged stone and fit new stone indent repair
	Cut out decayed/ damaged stone and fit new stone to match existing profile and tooling
	Remove fixing and repair with lime mortar
	existing open mortar joint
	Cracks to stone to be pinned or repaired with grout/ mortar repair ('P' indicates a pin is required)
	Hone surface of stone to feather uneven edges and remove any water traps
	Wholesale (100%) rake out of cementitious/defective mortar. Re-point with new lime mortar spec to be agreed on site with architect prior to commencement of works.
	Remove and re-new bird protection.
	Leaded windows

[illegible]