

SLIMLINE
GUARDIAN
FLOODLIGHT

Product Features

- Die-cast aluminium housing for maximum durability
- Easy installation with fit and tilt bracket
- Various colour temperatures available to suit all applications
- Supplied with 1 metre of cable, ideal where through-wall wiring is neccasary
- Option of PIR detection with adjustable settings and override functionality, operate in dusk till dawn mode only



30K
Hours



220
-240
Volt



BLACK
FINISH




3
YEAR
Warranty



Standard

Non-PIR

CAT NO.	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP	IP RATING
LFS6B130	600	8W	3000K	IP65
LFS6B150	600	8W	5000K	IP65
LFS12B130	1200	15W	3000K	IP65
LFS12B150	1200	15W	5000K	IP65
LFS18B130	1800	22W	3000K	IP65
LFS18B150	1800	22W	5000K	IP65
LFS30B130	3000	38W	3000K	IP65
LFS30B150	3000	38W	5000K	IP65

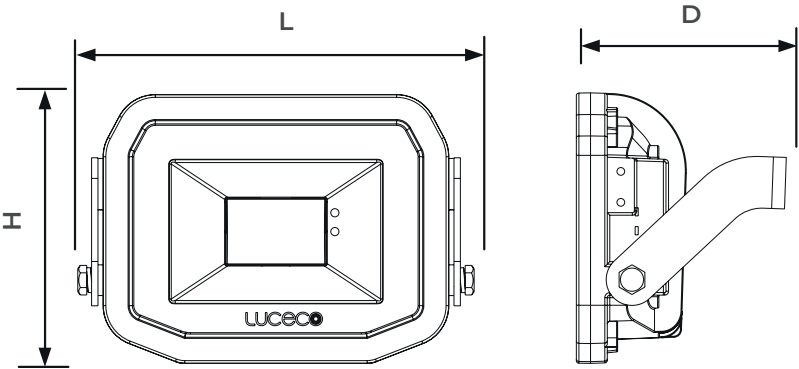

Product Dimensions

CAT NO.	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)
LFS6B1**	125	70	85
LFS12B1**	135	80	105
LFS18B1**	135	80	105
LFS30B1**	260	110	185
LFSP6B1**	125	130	135
LFSP12B1**	155	140	155
LFSP18B1**	155	140	155
LFSP30B1**	260	160	230

LUCECO



This luminaire contains built-in LED lamps.

A++

A+

A

B

C

D

E

} LED

The lamps cannot be changed in the luminaire.

874/2012