Roof trusses-Truss roof calculations to be submitted and approved before work on these elements are commenced. Conditional approval sought.



1 **Front**
1 : 100

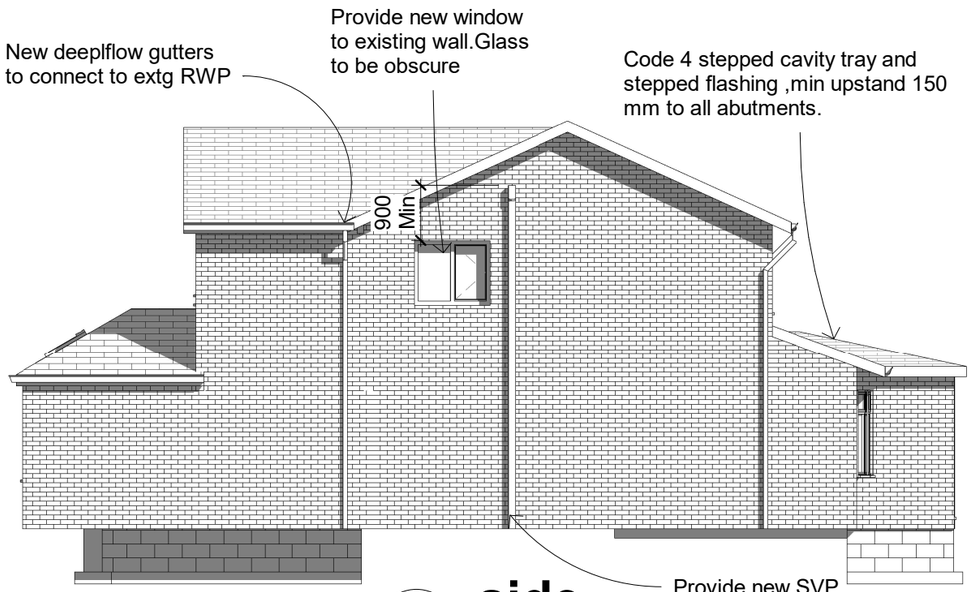

4 **side**
1 : 100

Code 4 stepped cavity tray and stepped flashing ,min upstand 150 mm to all raking abutments.

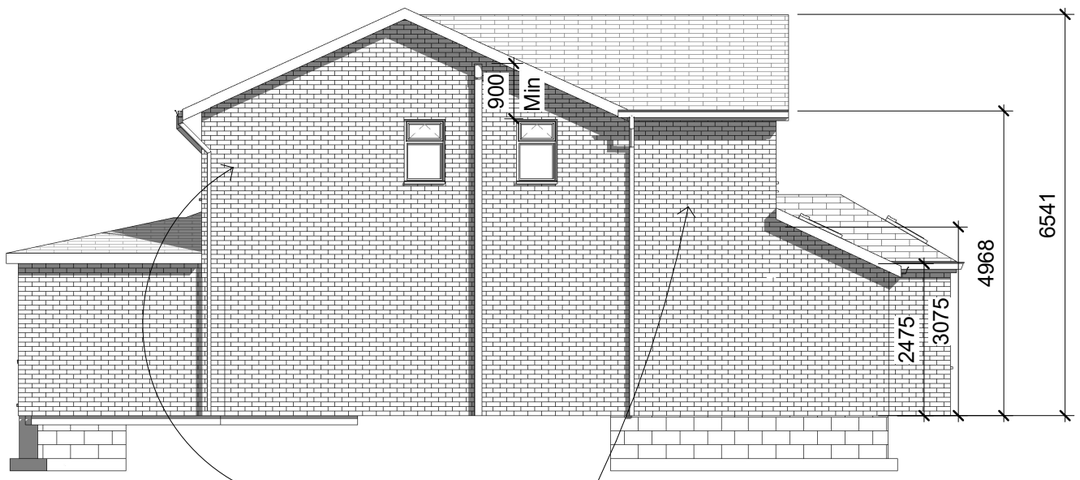

3 **Side**
1 : 100



2 **Rear**
1 : 100

NOTES This drawing is to be read in conjunction with all other relevant project drawings, schedules and notes and is applicable whether specifically referred to or not. The contractor is responsible for checking all dimensions on site prior to commencement of the works with any errors being reported to AGF Plans as soon as possible. Any construction work carried out prior to receiving all necessary approval for planning and or building regulations is entirely at the householders/clients risk. All building work to be completed to the satisfaction of the Local Authority Building Control Officer in accordance with the current Building Regulations and as such additional unforeseen building works may be required on site. The contractor shall inspect all adjoining properties which may be affected by the works prior to commencement of works and record and report to the owner any defects. The contractor shall be entirely responsible for the security, strength and stability of the building during the course of the works. Drawings produced for the purpose of Building Regulation approvals only and do not constitute full working drawings. All drawings copyright AGF Plans. This drawing may not be copied by any third parties without prior permission from AGF PLANS

HEATING
Extend all heating and hot water services from existing and provide new TVRs to radiators. Heating system to be designed, installed, tested and fully certified by a GAS SAFE registered specialist. All work to be in accordance with the Local Water Authorities bye laws, the Gas Safety (Installation and Use) Regulations 1998 and IEE Regulations

ELECTRICAL
All electrical work required to meet the requirements of Part P (electrical safety) must be designed, installed, inspected and tested by a competent person registered under a competent person self certification scheme such as BRE certification Ltd, BSI, NICEIC Certification Services or Zurich Ltd. An appropriate BS7671 Electrical Installation Certificate is to be issued for the work by a person competent to do so. A copy of a certificate will be given to Building Control on completion

SMOKE DETECTION
Mains operated linked smoke alarm detection system to BS 5446 - 1:2000 and BS5839-6:2004 to at least a Grade D category LD3 standard and to be mains powered with battery back up. Smoke alarms should be sited so that there is a smoke alarm in the circulation space on all levels/ storeys and within 7.5m of the door to every habitable room. If ceiling mounted they should be 300mm from the walls and light fittings. Where the kitchen area is not separated from the stairway or circulation space by a door, there should be an interlinked heat detector in the kitchen.

INTERNAL LIGHTING
Install low energy light fittings that only take lamps having a luminous efficiency greater than 45 lumens per circuit watt and a total output greater than 400 lamp lumens. Not less than three energy efficient light fittings per four of all the light fittings in the main dwelling spaces to comply with Part L of the current Building Regulations and the Domestic Building Services Compliance Guide.

BACKGROUND VENTILATION
Background ventilation - Controllable background ventilation via trickle vents to BS EN 13141-3 within the window frame to be provided to new habitable rooms at a rate of min 5000mm²; and to kitchens, bathrooms, WC's and utility rooms at a rate of 2500mm 2.

registered LABC Partner Authority Scheme

No.	Description	Date

AGF Plans & Architectural Services
AGF Plans and Architectural Services
121 Park Road,Westhoughton,Bolton
07980544857- agfplans@hotmail.co.uk

Planning
Building Control
Structural Calculations
Project Management

PROJECT
Proposed Double Extension To 13 Petrel Close,Rochdale ,OL11 5QT.

SHEET
Proposed Elevations

CLIENT
Mr F Azam

Date	Project number	Scale (@ A3)
06/10/2019	NDH/FA/1/19	1 : 100

Drawn by: Neil
Checked by: Checker

DRAWING NUMBER
4 of 7

REV

01/11/2019 17:21:26