
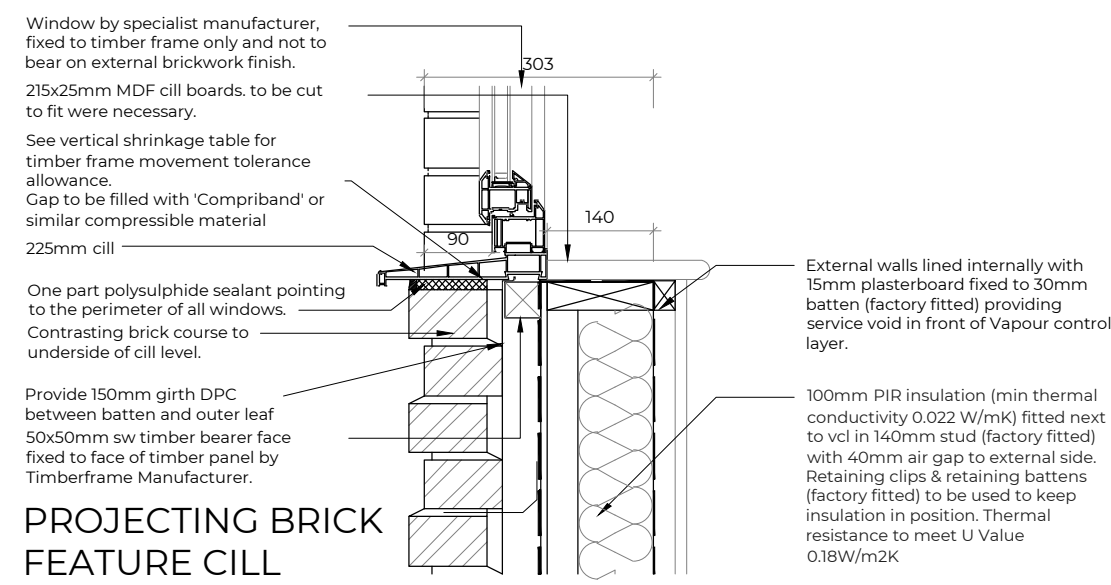
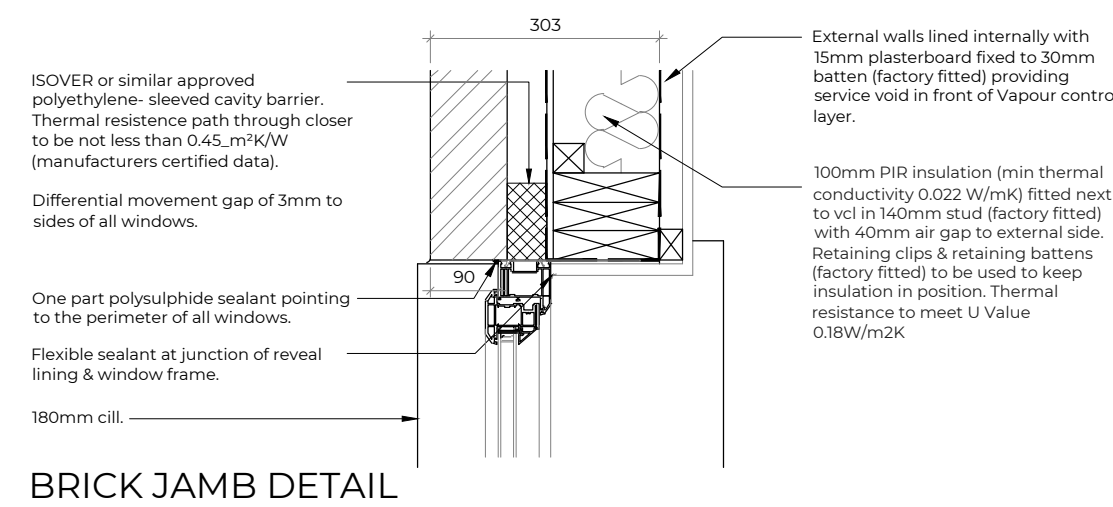


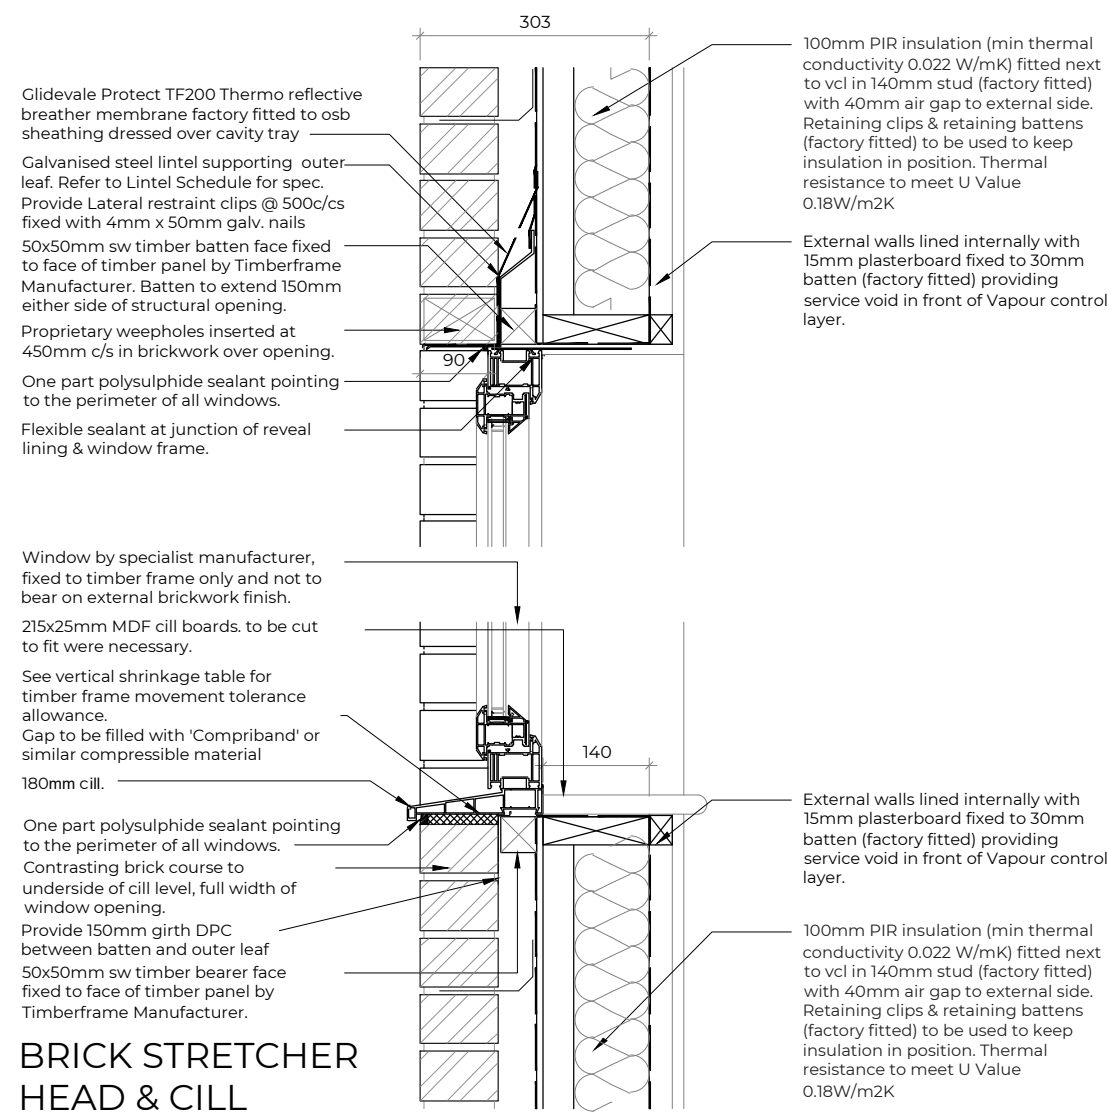

Note:
All windows to be fixed to align with brick course at head of window. Allowance for shrinkage of timber frame to be at cill of window.
Window to be fixed to timber frame only and not to bear on external brickwork finish.

Differential movement tolerances :
Single Storey : 5mm
First Floor : 15mm
Second Floor : 25mm
Eaves : Add 5mm to gap at level below

Window sizes and styles to be as indicated on house type drawings. All windows to be double glazed. All glass to windows within zone of 800mm from finished floor level to be toughened or laminated safety glass. All glass to doors (and to windows within 300mm at either side of door) within zone of 1500mm from finished floor level to be toughened or laminated safety glass. All in accordance with Part K of the building regulations, approved documents, BS6262 and BS6206.

Note:
Where a window is situated above a 'lean to' roof, an additional DPC is required to be fitted behind the timber batten (at cill) level. This will form a link with the cavity tray for the 'lean to' roof. Due to build sequence this additional DPC will need to be fitted by the timber frame manufacturer prior to arriving on site.



Stonebond Properties (Manchester)Ltd
Registered Office:
Suite 5, Egerton House
Towers Business Park
Wilmslow Rd
Didsbury, M20 2DX

site:	Stonebond Properties (Manchester) Ltd.		
title:	Partnerships Range Standard Details Window Reveal Details		
scale: @A3	1:10	drawn by:	PAD
date:	Aug 2023	checked:	GWP
drawing no:	SBM-TSD 4-06		
sheet no:	Sheet 1 of 1		revision: