

Tethys LED

OUTDOOR LUMINAIRES

REF EXT- B






CE UKCA

LED

IP65

IK06

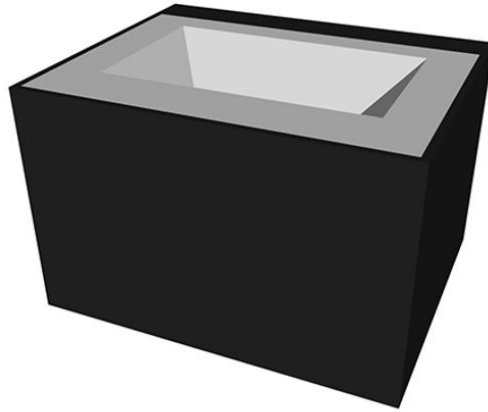

Description

The Tethys LED range is a decorative wall mounted fitting with a range of output options. The Tethys offers direct, indirect or combined direct/indirect options. This fitting can also give a wide angle, narrow or far reaching beam thanks to a choice of reflectors.

Application

- External Fascias
- External Building Walls
- External Architectural Lighting
- Walkway Lighting

Body & Finish

Manufactured from folded steel, vandal resistant screws and high output clear or micro-prism diffuser.

Attachments

- Inbuilt PIR



Order Codes

Wattage	Luminous Flux	lm/W	Height	Width	Depth	Product Code
14.8 W	1741 lm	118 lm/W	102 mm	158 mm	66 mm	SGL/LED/2124/TEH
30.0 W	3483 lm	116 lm/W	102 mm	158 mm	66 mm	SGL/LED/4248/TEH
36.8 W	4191 lm	113 lm/W	102 mm	158 mm	66 mm	SGL/LED/5112/TEH
14.8 W	1741 lm	118 lm/W	105 mm	240 mm	200 mm	SGL/LED/2124/TEH
30.0 W	3483 lm	116 lm/W	105 mm	240 mm	200 mm	SGL/LED/4248/TEH
36.8 W	4191 lm	113 lm/W	105 mm	240 mm	200 mm	SGL/LED/5112/TEH
14.8 W	1741 lm	118 lm/W	160 mm	250 mm	200 mm	SGL/LED/2124/TEH
30.0 W	3483 lm	116 lm/W	160 mm	250 mm	200 mm	SGL/LED/4248/TEH
36.8 W	4191 lm	113 lm/W	160 mm	250 mm	200 mm	SGL/LED/5112/TEH

Additional lumen outputs are available due to mA ratings and codes may vary from those stated. Please contact us for further details.

Sizes

- Height: 102/105/160 mm
- Width: 158/240/250 mm
- Depth: 66/200 mm

Control Gear

Tridonic/OSRAM

- Standard LED
- DALI Dimming LED
- WI-FI

Code Options

- Add /EMG to codes for Emergency
- Add /EMG/ST to codes for Self-Test Emergency
- Add /EMG/AD to codes for Addressable Emergency
- Add /DALI to codes for DALI Dimming

Main Attributes

- Module efficacy up to 195 lm/W
- 50,000h L90 at 25°C
- Self Cooling
- Colour Rendering Index >80
- 7 Year Guarantee*
- CE Marked

* Please refer to the Warranty for more information.

LED Boards

- Tridonic/OSRAM LED
- Colour Temperatures Available: 3000k/4000k/5000k/Tunable
- All LED data and performance data is taken at an ambient temperature of +25°C

Photometrics

-