

KEY - Floor Finishes: Please note that solid colours are a separate item to solid colours with hatching overlaid.

- Stone - New: Specified by landscape consultant to match and run in with terrace stone paving.
Note: There is only 110mm o/a depth to lay the paving in due to clock tower lift level restrictions.
- Stone - Existing: Remaining insitu. Minor localised repairs and light clean.
- Stone - Existing: Stone removed and stored during Phase 1 to be re-laid in same layout - **NBS M40-115A**.

Note - for all areas of existing stone flags to be re-laid in same layout: Allow 10% salvaged stone from other areas of the Town Hall to make up any shortfall.

- Stone - Existing: Salvaged internal stone paving from elsewhere in the building (i.e. where lift has been removed) to be used to carry out localised making good and repairs.

- Timber - New:
TYPE 1 Solid wood flooring - **NBS K21-110**
TYPE 2 Engineered wood flooring - **NBS K21-111A**

- Timber - Existing: Fully repaired, overhauled and finished - **NBS C53-122; M60-179**.

- Timber - Existing Repaired: **NBS C53-122; M60-179**.
Repairs: Allow a provisional sum. Full extent and scope of repairs to be confirmed when protection removed.

- Minton Tiles - Existing: Fully repaired, overhauled and finished.
Allow a provisional sum. Full extent and scope of repairs to be confirmed when protection removed and specialist engaged.

- Quarry Tiles to G13f - Store: Fully repaired, overhauled and finished. See drawing for repairs.

- Vinyl - New:
TYPE 1 **NBS M50-110A** - *Forbo ColorexEC, Colour: Quartz (EC 250207)*
TYPE 2 **NBS M50-149** Note: provide samples for client approval with potential to revert back to existing timber floor
TYPE 3 **NBS M50-150A**
TYPE 4 **NBS M50-151** - *Altro Aquarius, Colour: Walnut (AQ2007)*
TYPE 5 **NBS M50-152**

- Floor paint - Watco single pack matt concrete paint. Colour: RAL 7032 stone.
Carpet - New: **NBS M50-130**

- Matwell - New:
- Matting - **NBS N10-300A**
- Matwell Frame - **NBS N10-290A**

- Threshold - Existing: Retained and/or no threshold strip
TE TYPE A Timber
TE TYPE B Brass (carefully removed and cleaned before re-use)
TE TYPE C Stone
TE TYPE D Tiled

- Threshold - New (finished floor levels to be confirmed prior to order):
TN TYPE A Timber threshold strip on door centreline. To match adjacent timber and finish - **NBS M50-741**
TN TYPE B Brass threshold strip on door centreline - **NBS M50-740B**
TN TYPE C Brass cover strip on door centreline - **NBS M50-740C**
TN TYPE D Bronze threshold strip on door centreline - **NBS M50-742**
TN TYPE E Aluminium cover strip on door centreline - **NBS M50-745**

- Skirting Existing - Fully repaired, overhauled, prepared and finished as per coding below:

- Exp** Timber Skirting part of Dado Panelling - Refer to drawing references on plan for insitu/reinstatement, Joinery & Repair Schedule 6020 and Decorations Schedule 6500
Ext Timber Skirting - Refer to Joinery & Repair Schedule 6020 and Decorations Schedule 6500
ExR Existing Render/Plaster Skirting - Refer to drawing references on plan and Decorations Schedule 6500
EXTI Existing Tiled Skirting

- New to match existing

- Skirting New:
NT Timber Skirting - Refer to New Skirting Schedule 6503 and Decorations Schedule 6500.
NV Vinyl Coved Skirting - Refer to relevant vinyl floor type spec clause for integrated coved skirting.
NTI Tiled Skirting - Refer to drawing references on plan

Allow for extending floor finishes into all newly formed openings.

For access cover locations refer to dwgs:
- Ground (2091) - Mezzanine (2092) - First (2093) - Second (2094)
- Basement (2080) - bespoke service access panels to service trenches TBC.

- X** BLUE Fire Door - No issue forseen. Please see accompanying Schedule 6104 for any mitigation actions required.

- X** ORANGE Fire Door - Potential issue with floor levels. HHS to remove protection and allow for inspection by Architect/potential localised level survey.

- Floor Box - see MEP drawings for setting out (2091-2094)

Notes

- Any dwg format drawing is to be read in conjunction with and at the scale of the accompanying pdf.
- Where colours other than black or grey are used, the drawing must be plotted in colour.
- For status 'C' (Construction) drawings all dimensions are to be checked on site by the contractor, scaling is for Local Authority purposes only.
- Unless otherwise indicated, all dimensions are in millimeters.
- All information on this drawing is to be read in conjunction with the relevant Donald Insall Associates specification and trade contractors' drawings and information by specialists.
- In the event of any discrepancy, please contact us immediately.
- This drawing may contain survey information by others and is to be used solely for the purposes for which it was issued.
- These are uncontrolled documents issued for information purposes only. If you have any queries regarding the drawings, please contact DIA immediately.
- Please note DIA cannot be held responsible for any errors arising from changes made to an uncontrolled dwg file.


© 2019 DONALD INSALL ASSOCIATES LTD

Status codes

S0	Work in Progress	D1	Suitable for Costing
S1	Suitable for Co-ordination	D2	Suitable for Tender
S2	Suitable for Information	D3	Suitable for Contractor Design
S3	Suitable for Review & Comment	D4	Suitable for Manufacture/Procurement
S4	Suitable for Stage Approval		


A1,A2,A3, An etc. Approved and accepted as stage complete
B1,B2,B3, Bn etc. Partially signed off: with minor comments from the Client

CR Construction Record

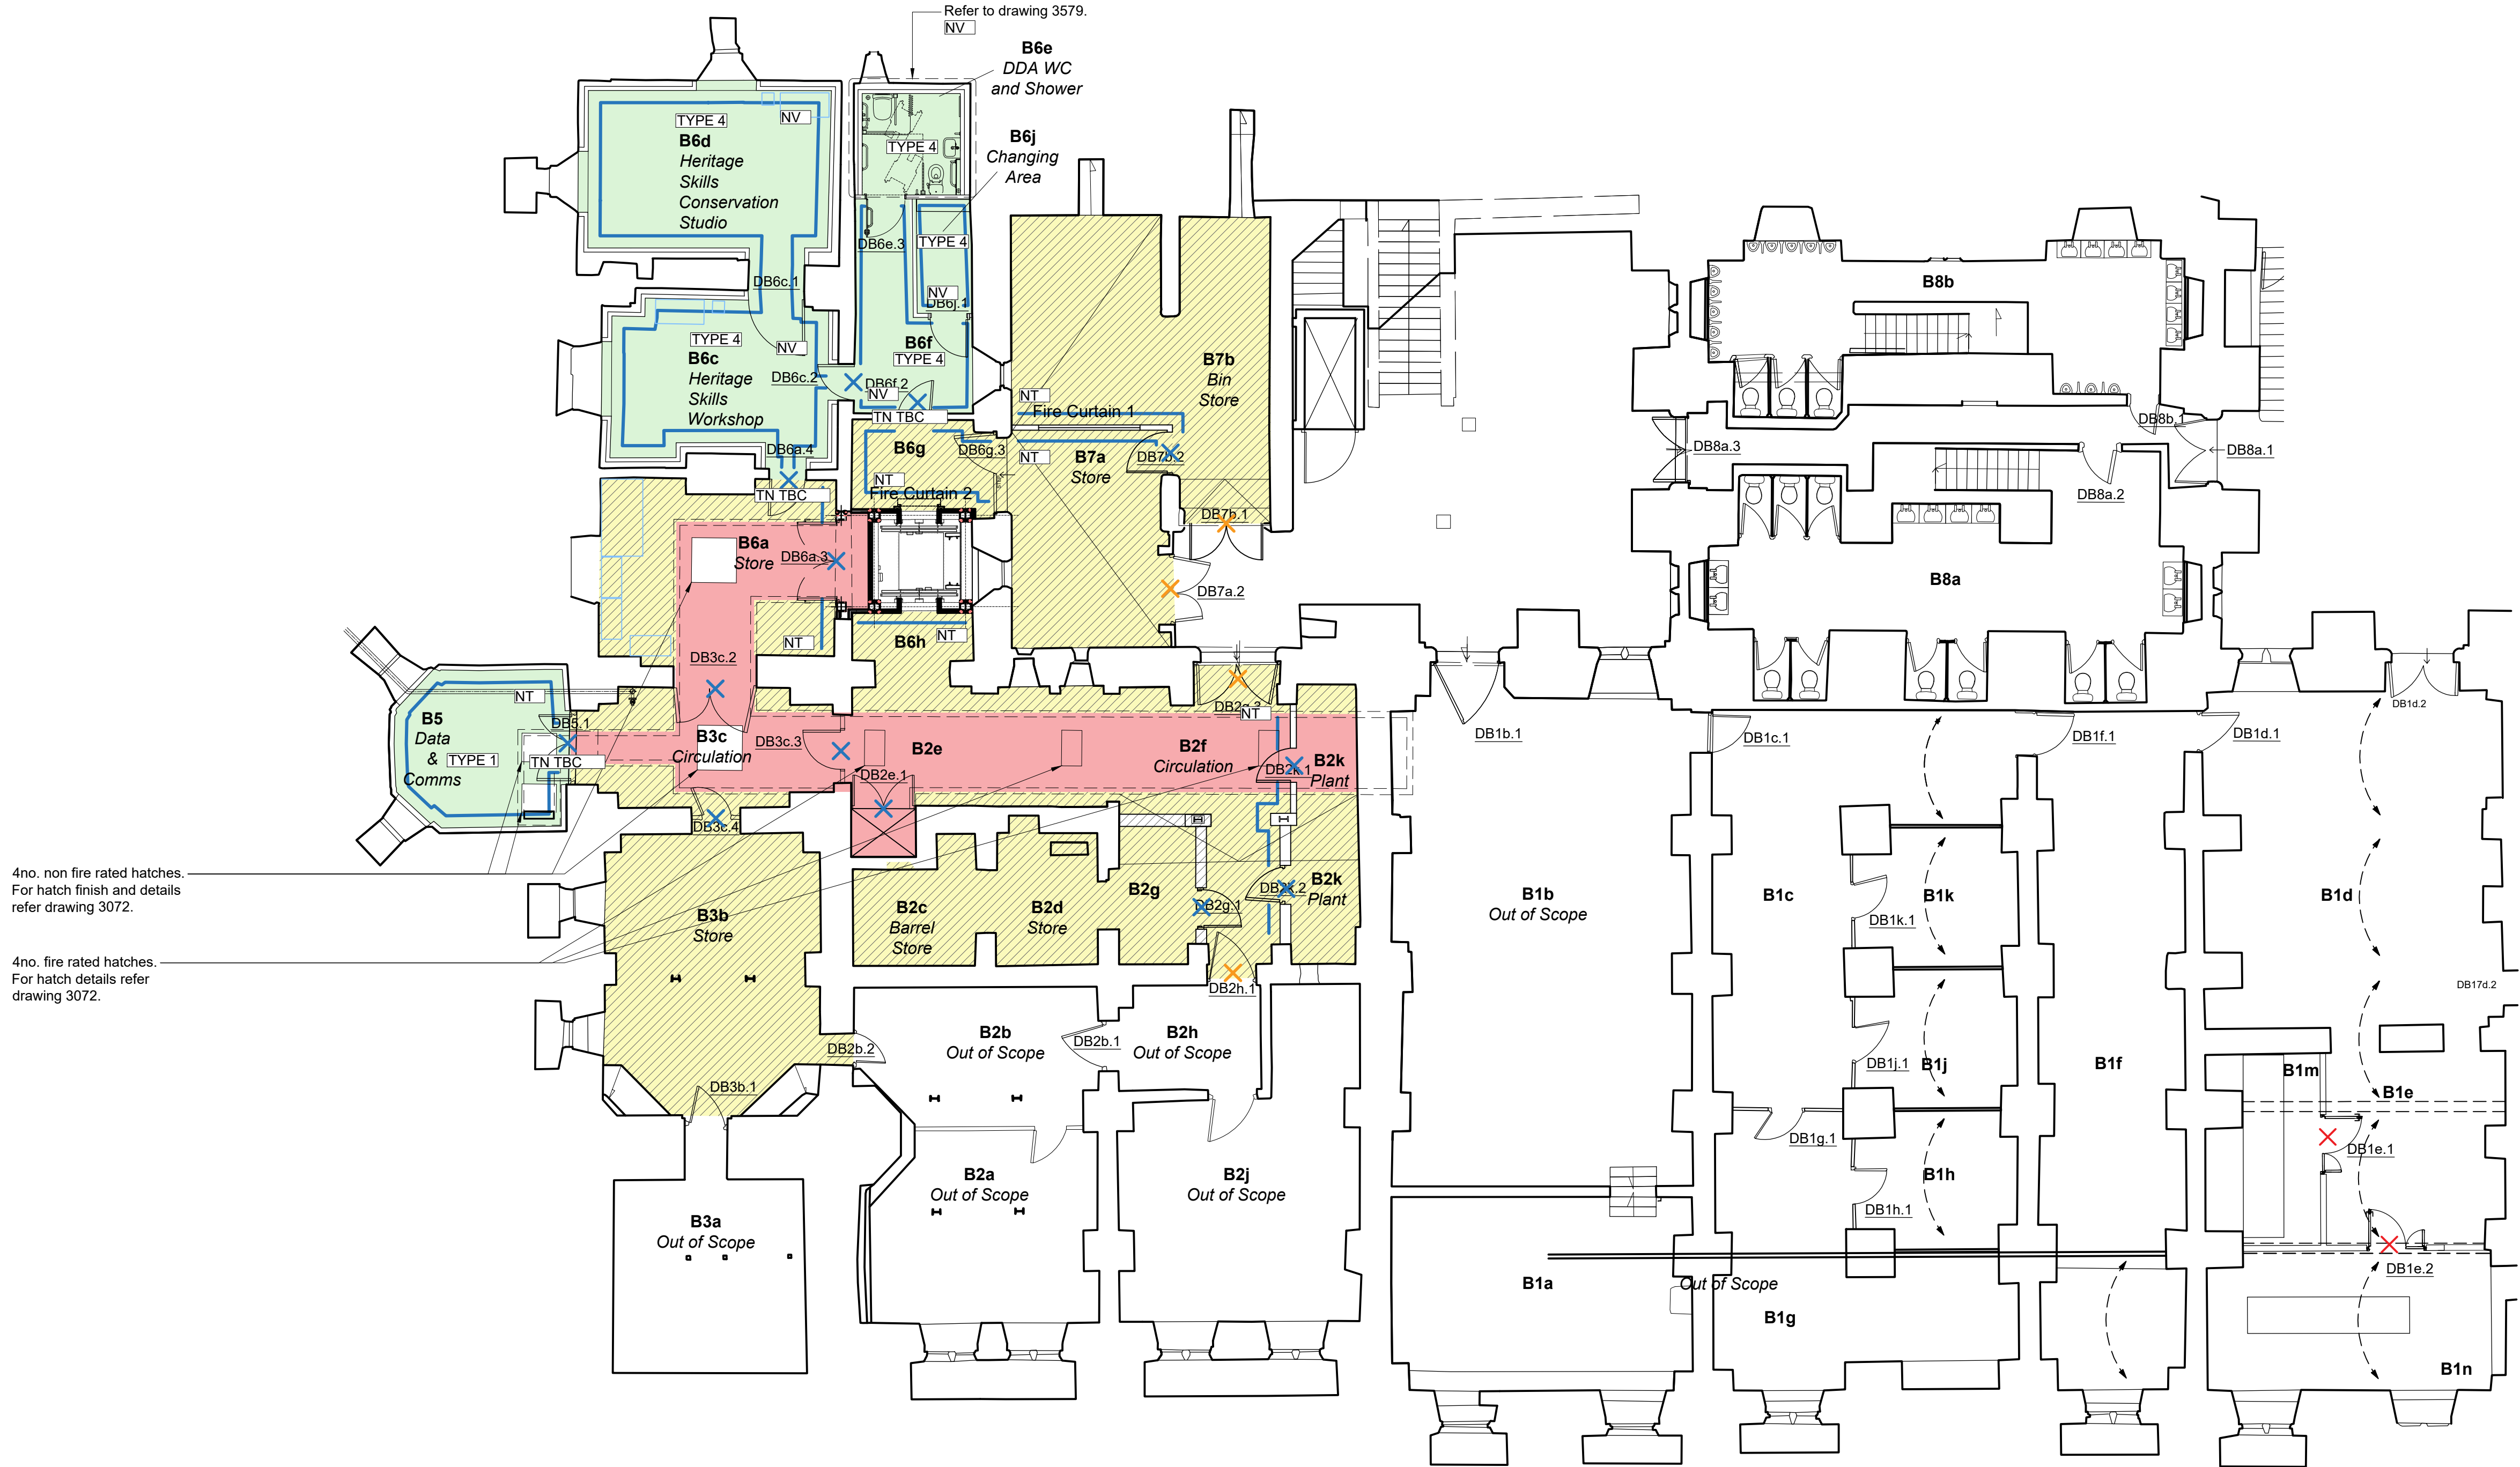

4no. non fire rated hatches.
For hatch finish and details
refer drawing 3072.

4no. fire rated hatches.
For hatch details refer
drawing 3072.

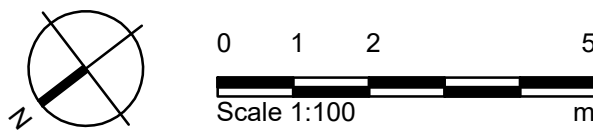

Donald Insall Associates
Chartered Architects and Historic Building Consultants

Bridgegate House, 5 Bridge Place, Chester CH1 1SA
(+44) 01244 350 063
chester@insall-architects.co.uk