

OPENING SCHEDULE
 **Please note this table only captures openings. All other demolition work is captured on red on the drawing above.*

Opening Ref	Room Number	Description	BoQ Reference
1	Ceiling over S14a	New opening in existing ceiling to allow formation of lift shaft - 1805mm by 2110mm	Page 23A
2	T1a	New opening in existing floor to allow formation of service riser.	Page 25A

NOTES

The existing building measured survey has been undertaken by Salford Archaeology and all reference to this information is referenced directly from the associated drawings.

KEY

Coloured areas of hatch on interior elevations indicate existing fixtures, fittings or built fabric, proposed to be removed, as below:

- (Light Pink) - Existing to be removed, viewed in elevation.
- (Dark Red) - Existing to be removed, cut through by plane of view.
- (Red Stripe) - Existing to be removed, above

GENERAL DEMOLITION NOTES


All demolition to be carried out in accordance with Price & Myers recommendations for propping and temporary support.

Existing MEP

All redundant services to be removed and all holes to be filled with like for like. Refer to Max Fordham proposals as required.

SETTING OUT

Prior to demolition, architect and contractor to Mark openings on site, and confirm setting out.

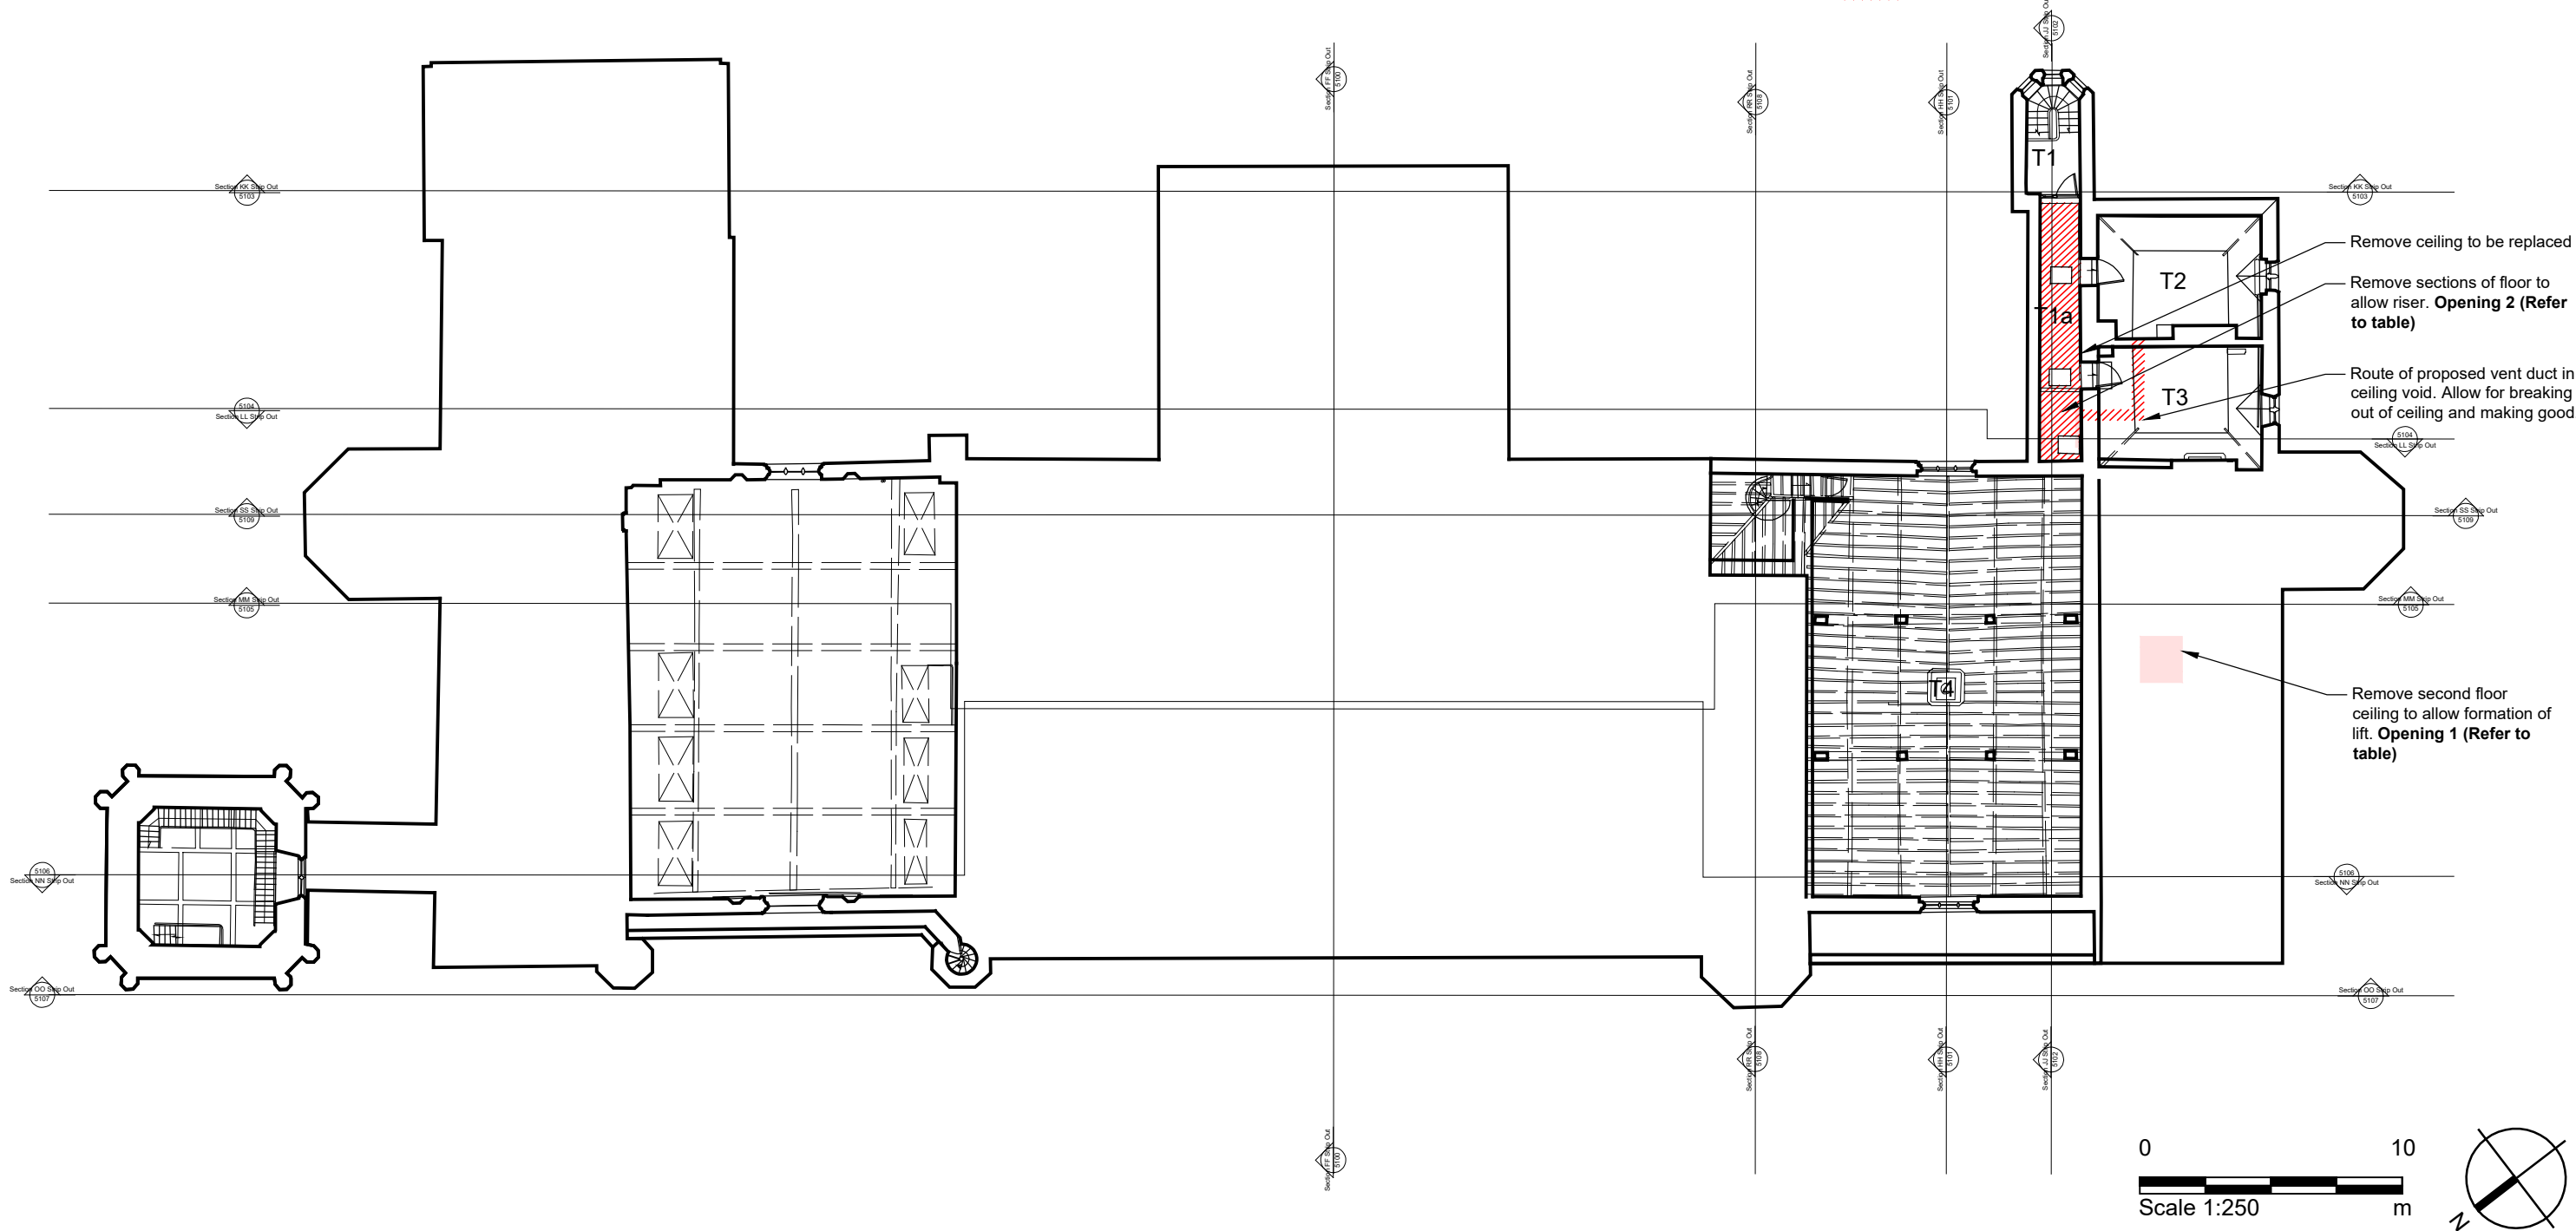

Notes

- Any dwg format drawing is to be read in conjunction with and at the scale of the accompanying pdf.
- Where colours other than black or grey are used, the drawing must be plotted in colour.
- For status 'C' (Construction) drawings all dimensions are to be checked on site by the contractor, scaling is for Local Authority purposes only.
- Unless otherwise indicated, all dimensions are in millimeters.
- All information on this drawing is to be read in conjunction with the relevant Donald Insall Associates specification and trade contractors' drawings and information by specialists.
- In the event of any discrepancy, please contact us immediately.
- This drawing may contain survey information by others and is to be used solely for the purposes for which it was issued.
- These are uncontrolled documents issued for information purposes only. If you have any queries regarding the drawings, please contact DIA immediately.
- Please note DIA cannot be held responsible for any errors arising from changes made to an uncontrolled dwg file.

Status codes

- | | |
|---|--|
| S0 Work in Progress | D1 Suitable for Costing |
| S1 Suitable for Co-ordination | D2 Suitable for Tender |
| S2 Suitable for Information | D3 Suitable for Contractor Design |
| S3 Suitable for Review & Comment | D4 Suitable for Manufacture/Procurement |
| S4 Suitable for Stage Approval | |
- A1,A2,A3, An etc.** Approved and accepted as stage complete
B1,B2,B3, Bn etc. Partially signed off: with minor comments from the Client
CR Construction Record

P07	23-09-24	CZS	DAC	For Listed Building Consents Updates
C02	16-10-23	CZS	ARF	Openings 1 & 2 updated
C01	21-09-2023	CZS	ARF	For Construction
P06	14-09-2023	AF	ARF	Updated to co-ordinate with BoQ and Consultant information
P05	15-08-2023	CZS	ARF	Value Engineering options
P04	22-06-23	CZS	ARF	For Building Control
P03	05-06-23	CZS	ARF	For Planning & LBC
P02	16-02-23	CZS	ARF	For costing
P01	30-01-23	CZS	ARF	Initial Issue
Rev	Date	Dwn	Auth	Revision

Rev	Date	Dwn	Auth	Revision
-----	------	-----	------	----------

Donald Insall Associates
 Chartered Architects and Historic Building Consultants

Bridgegate House, 5 Bridge Place, Chester CH1 1SA
 (+44) 01244 350 063
 chester@insall-architects.co.uk

Rochdale Town Hall
 for Rochdale Development Agency

Scale A3@ 1:250
 Status S4
 Purpose of Issue Listed Building Consents

Phase Three
 Third Floor Strip Out Plan

File Name RTH.06 - DIA - XX- ZZ - DR- A - 5005
 Project Originator Volume Level Type Role Number Revision P07