

TREE PLANTING
18-20CM GIRTH

HEDGE PLANTING NATIVE MIXED SPECIES

HEDGE PLANTING SINGLE SPECIES

ORNAMENTAL SHRUB PLANTING

ORNAMENTAL 25L
SHRUB

CLIMBERS. SUPPLIED READY
TRAINED ON FAN TRELLIS

TURF
(CLOSE MOWN)


DECORATIVE GRAVEL
OVER WEED CONTROL
MEMBRANE

Abbreviation	Species	Specification	Height	Pot Size	Density	Number of Plants
BUX	<i>Buxus sempervirens</i> 'Suffruticosa'	Single row	20-30cm	5L	8/m	1430 ±
CAR	<i>Carpinus betulus</i>	Double Staggered row	60-80cm	10L	3/m	1664 ±
Ee	<i>Elaeagnus axillig</i>	Single row	60-80cm	10L	3/m	1395 ±
LoA	<i>Lonicera ovalifolium</i> 'Aureum'	Single row	60-80cm	10L	3/m	810 ±
PL	<i>Prunus laurocerasus</i>	Single row	60-80cm	10L	3/m	2581 ±
PLO	<i>Prunus laurocerasus</i> 'Otto Luyken'	Single row	40-60cm	10L	3/m	405 ±

Total :8195 ±.

Climbers - ready trained on fan trellis									
HECO	Hedera coccinea	Persian ivy	-	-	-	-	-	80-80	SL
HECO	Hydrangea petiolaris	Hydrangea	-	-	-	-	-	80-80	SL
SHRUBS									
CSB	Cornus alba 'Sticosa'	Dogwood	-	-	-	-	-	25L	1
ETV	Euroyuncus japonicus 'Oxanus Aurea'	Scirpus	-	-	-	-	-	25L	1
IRAG	Phormium Tenax 'Red Bay'	New Zealand Flax	-	-	-	-	-	25L	1
PLT	Phormium tenax 'Variegata'	New Zealand Flax	-	-	-	-	-	25L	1
PRR	Phodinus x fassai 'Red Robin'	Christmas berry	-	-	-	-	-	25L	1
PS	Prunus laurocerasus	Cherry laurel	-	-	-	-	-	25L	1
SCS	Sarcococca confusa	Sweet box	-	-	-	-	-	25L	1
VEB	Viburnum tinus	Laurustinus	-	-	-	-	-	25L	1
AV	Acacia linearis 'Variegata'	Japanese Laurel	-	-	-	-	-	60-80	10
EBL	Elaeagnus oblongifolia 'Limeglaz'	Elaeagnus	-	-	-	-	-	60-80	10
EQD	Euroyuncus japonicus 'Oxanus Aurea'	Scirpus	-	-	-	-	-	60-80	10
ISQ	Ilex aquifolium 'Silver Queen'	Holly	-	-	-	-	-	60-80	10
MC	Mahonia x media	Oregon grape	-	-	-	-	-	60-80	10
PFU	Parisii Forest Flame	Parisii	-	-	-	-	-	60-80	10
PLP	Prunus laurocerasus	Cherry laurel	-	-	-	-	-	60-80	10
TRM	Trees sanguinea 'King Edward VII'	Japanese laurel	-	-	-	-	-	60-80	10
FJ	Fatsia japonica	Japanese aralia	-	-	-	-	-	40-60	SL
LV	Lavandula angustifolia 'Varia'	Lavender	-	-	-	-	-	40-60	SL
LV	Lavandula nana 'Baggesunds Gold'	Hampeckia	-	-	-	-	-	40-60	SL
LNH	Lotus 'Elizabeth'	Lotus japonicus chinensis	-	-	-	-	-	40-60	SL
PE	Prunus laurocerasus 'Oxio Lyukeri'	Cherry laurel	-	-	-	-	-	40-60	SL
PS	Prunus laurocerasus 'Rubra'	Shimizu	-	-	-	-	-	40-60	SL
BSR	Berberis 'Bartramia'	Japanese barberry	-	-	-	-	-	30-40	SL
RCO	Bergenia cordifolia	Heart-leaved bergenia	-	-	-	-	-	30-40	SL
CTC	Ceanothus thyrsiflorus repens	Creeching blue blossom	-	-	-	-	-	30-40	SL
EEG	Euroyuncus fortunei 'Emerald and Gold'	Scirpus	-	-	-	-	-	30-40	SL
ESQ	Euroyuncus fortunei 'Silver Queen'	Scirpus	-	-	-	-	-	30-40	SL
HEP	Hedera alabaris 'Red Edge'	Hedera	-	-	-	-	-	30-40	SL
HEP	Hedera pinnatifida 'Pavot'	Hedera	-	-	-	-	-	30-40	SL
HEP	Hedera helix	Ivy	-	-	-	-	-	30-40	SL
LAYST	Lavandula stoechas	Lavandula stoechas	-	-	-	-	-	30-40	SL
MAH	Mahonia aquilegifolia 'Apollo'	Oregon grape	-	-	-	-	-	30-40	SL
SS	Senecho 'Sunshine'	Brachyglottis	-	-	-	-	-	30-40	SL
SLA	Sorbus laetifolia 'Anthony Waterer'	Japanese spindle tree	-	-	-	-	-	30-40	SL
VDV	Viburnum davidii	Viburnum davidii	-	-	-	-	-	30-40	SL

:Plants for pollinators (RHS) n: Native EHS: Extra heavy standard X: Times transplanted C: Container grown

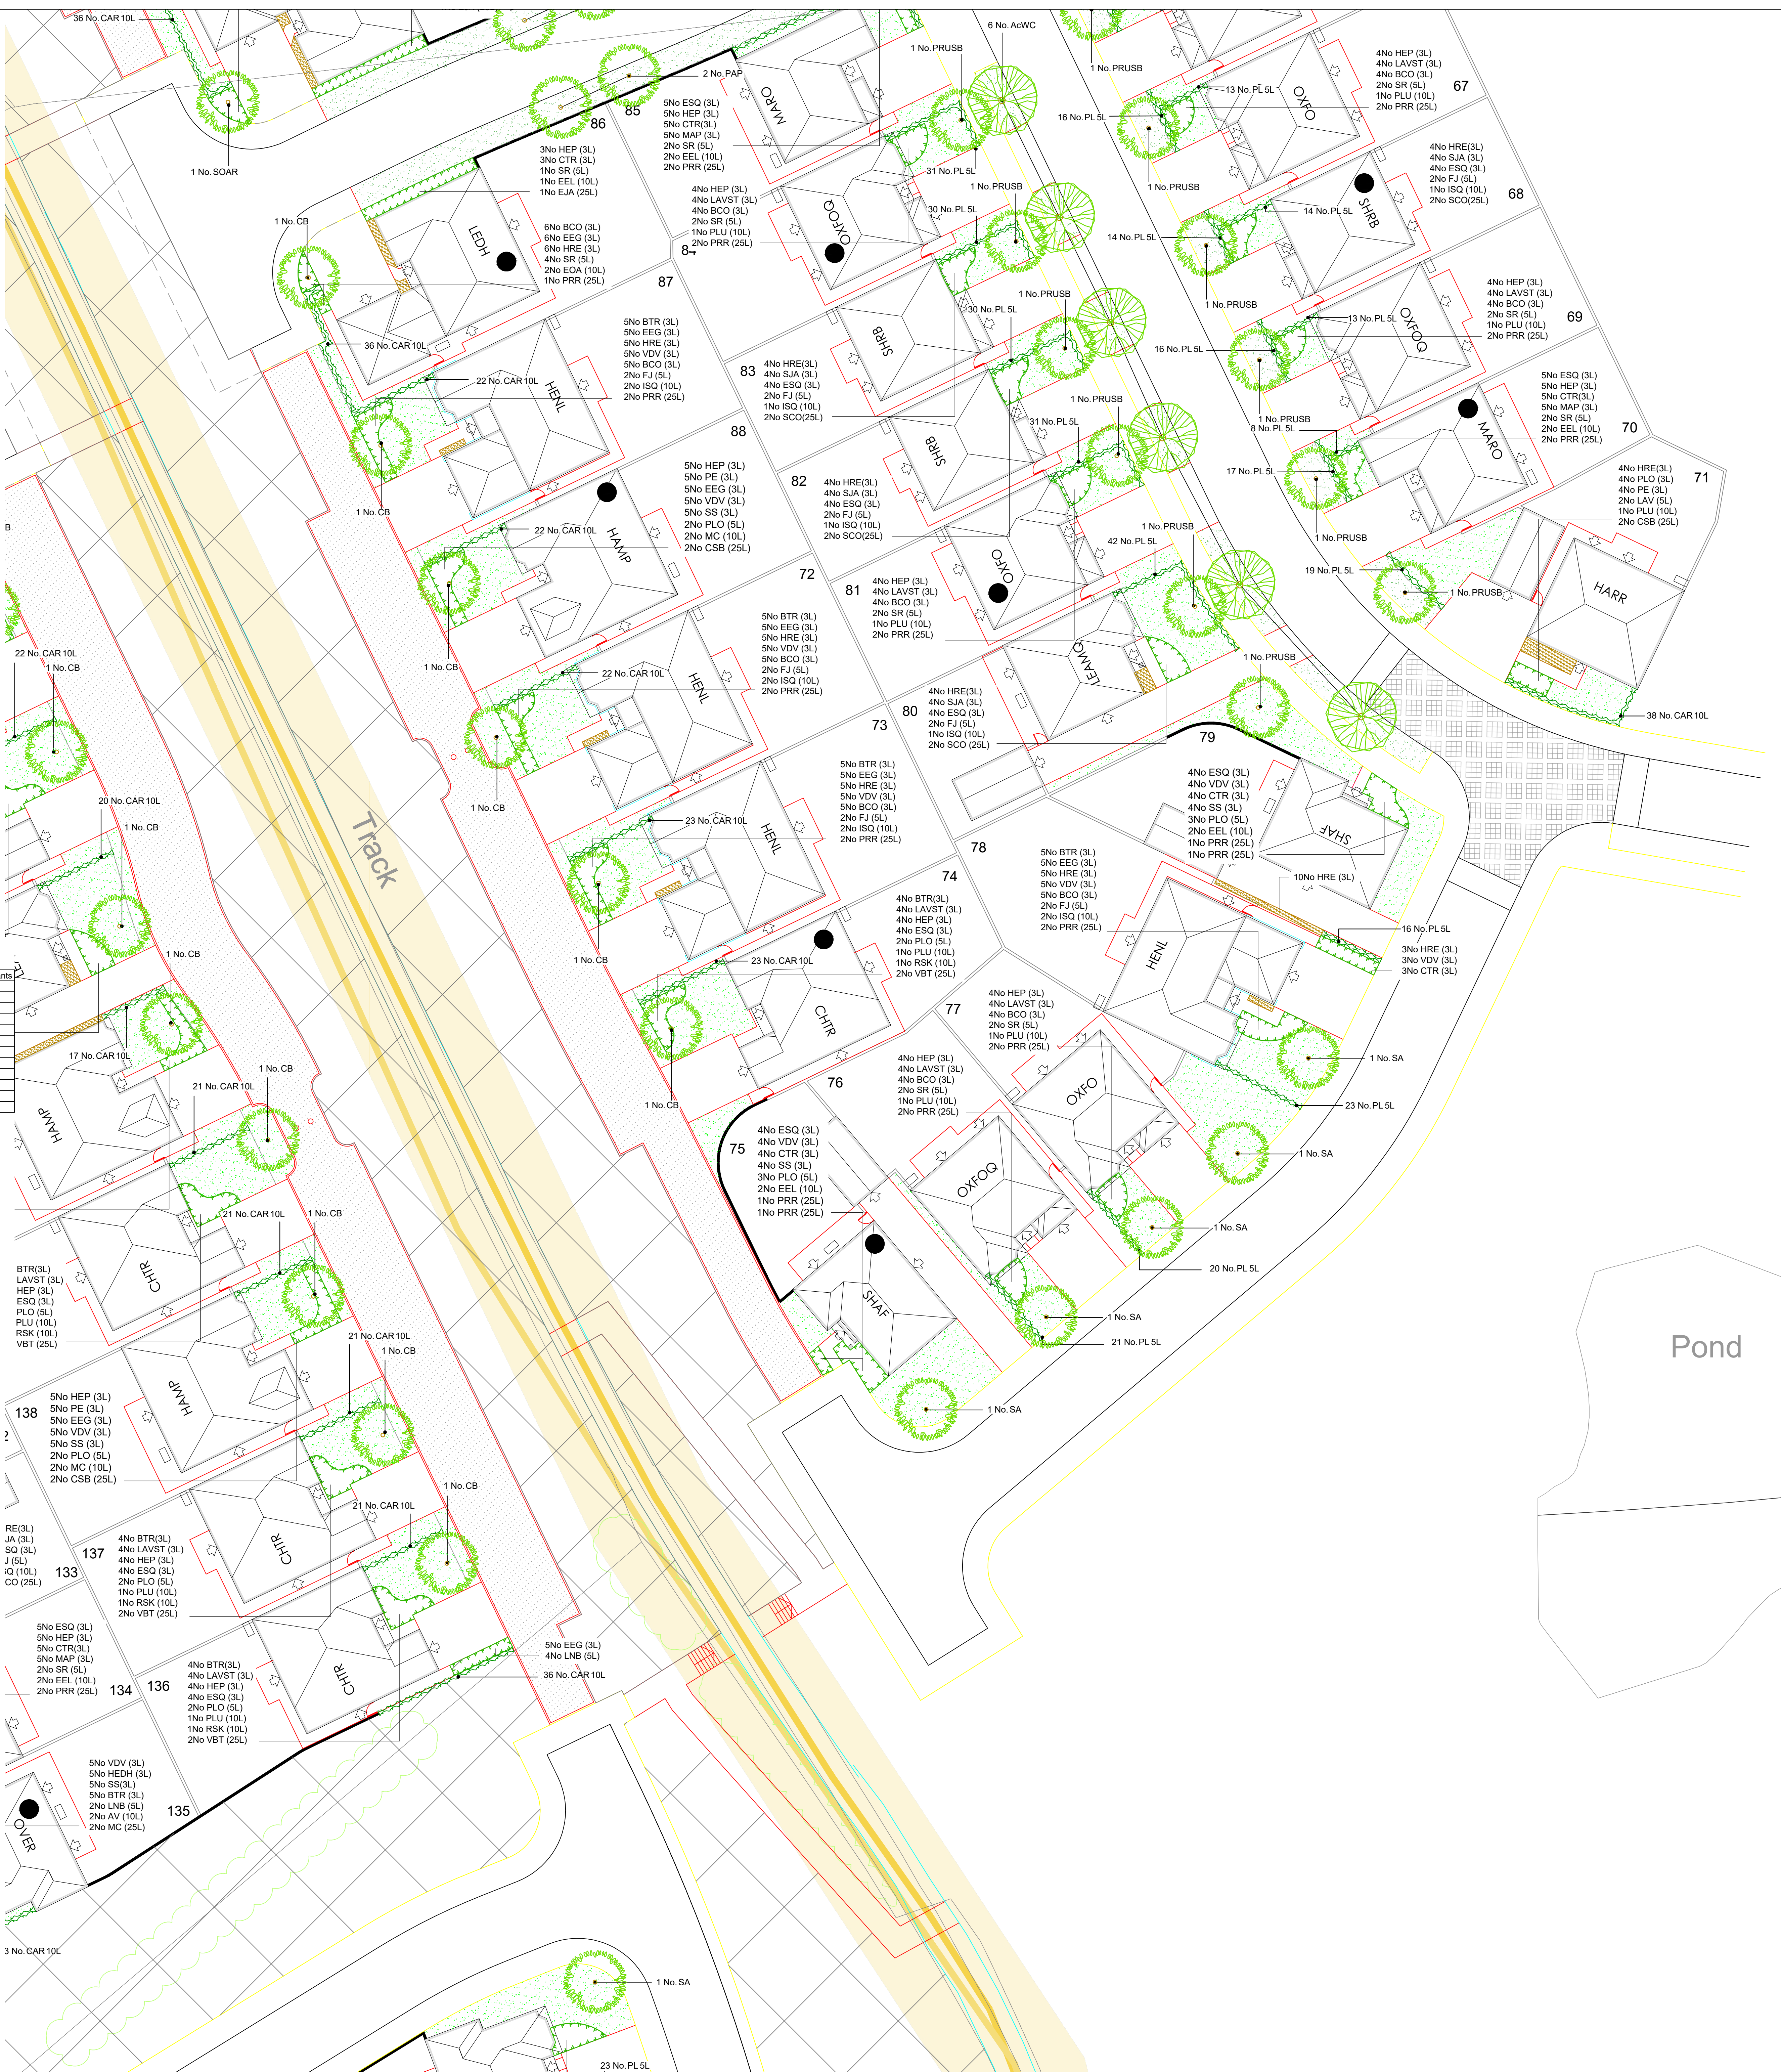[illegible][illegible]

Soil Preparation and Maintenance

Seed Sowing and Cultivation

Seeds should be sown and covered by the Landscape Architect before cultivation and seeding. All areas to be seeded shall be cultivated to 100mm depth and all weeds, stones, and refuse larger than 50mm shall be removed by 7. Cultivated soil shall be rolled and raked to produce a risk and 25-25mm depth. Allow for hand cultivation where machine work is not possible. Seed sowing must immediately follow the preparation of the seed bed.

Seeding

Seeding shall be carried out during summer equinox. All sowing is at the contractor's own risk and any germination fails shall be re-seeded at the contractor's own expense. No operation shall be carried out which could cause erosion and transverse drainage and the seed shall be rolled or raked in. Seeding shall be at the rate of 50 grammes per sq.m. and overseeding shall be at a rate of 20 grammes per sq.m.

Seed Mix

The seed mix shall be 422 mix, obtainable from Germal Seed GB.

Grass seed used shall be of the composition, purity and germination as specified in BS 4248: 1989

Certificates of purchase shall be provided on all deliveries prior to the sowing of grass seed. All seeds, mixtures, purity and germination percentages.

Alteration of culture of the above species may only be approved by the landscape architect.

Protection of Newly Sowed Areas

Where the grass is sown in areas exposed to erosion to ensure that pedestrian and other traffic does not cross the grass areas during cultivation, seeding or until grass is established. Where obvious erosion is occurring, the contractor shall erect an approved temporary fence so as to minimize the maintenance period of until such time as it is no longer necessary, as directed.

Flare Cut

When the grass is 100mm high, it shall be cut down to 50mm or less as to avoid runoff. If the grass has been allowed to grow any higher than 100mm then the cuttings shall be rolled off and taken off site.

Second Cut

When the grass is 65mm high a second cut shall be carried out using a roller mower. No more than one third of the foliage may be removed.

Subsequent Cuts

Thereafter, when the grass grows to 100mm high, it shall be cut down to 50mm with a flake type mower, until the end of the maintenance period, or longer so directed. The grass shall be cut on a regular basis if so directed.

Making Good

Any defects such as drainage, ponding, sparse germination or disease shall be made good and re-seeded all at once.

Damage to Existing Grass

The contractor will be responsible for cultivating, seeding and maintaining, as above all areas of existing turf that are damaged during the course of the works for reasons of storage, working or any other reason. The contractor shall be responsible for any areas which are specified walked and measured in the contract.

Any areas, which in the opinion of the Landscape Architect, are consolidated during the course of the works, shall be loosened with a ripper or other suitable implement to ensure adequate

MAINTENANCE
All maintenance to be carried out up to handover to the adopting authority/ householder from the date of planting and staking to ensure successful establishment. All dead, diseased, damaged plants must be replaced during this time unless the local Planning Authority, in writing, agrees variation to this.

Weeding
All beds to be kept weed free to hand weeding. Beds to be forked over as necessary to keep soil loose to approved cultivators with no rollers.

Pruning
At appropriate time, prune plants to remove dead, dying or diseased wood and suckers to promote healthy growth and natural shape.

Watering
The Contractor shall ensure that sufficient water is applied to maintain healthy growth.

Litter
Site to be kept free of litter.

Grass cutting
Grass cutting shall be carried out after first treatment is applied; blades not 20mm above ground. The Contractor shall continue cutting until appropriate treatment during the growing season, minimum 40mm high weed up grass shall be handed over. Weeding, watering, cutting, use of all erosion and settlement and ground reinforcement necessary to establish a uniform and healthy stand of grass shall continue until handover to the householder.


Addition of trees to grass verges		20/03/23	INC	A
©Copyright reserved		Date	Drawn	

A green square logo with the letters 'tba' in white lowercase font. The logo is tilted slightly to the right.

Landscape Architecture
Arborescence

Trevor Bridge Associates Ltd
Ashley Old Bath
Stamford Street West
Aldham-Parsons Lane
Lincoln OL6 7FW

Tel: 0181-904 2099
E-mail: info@trevorbridge.co.uk

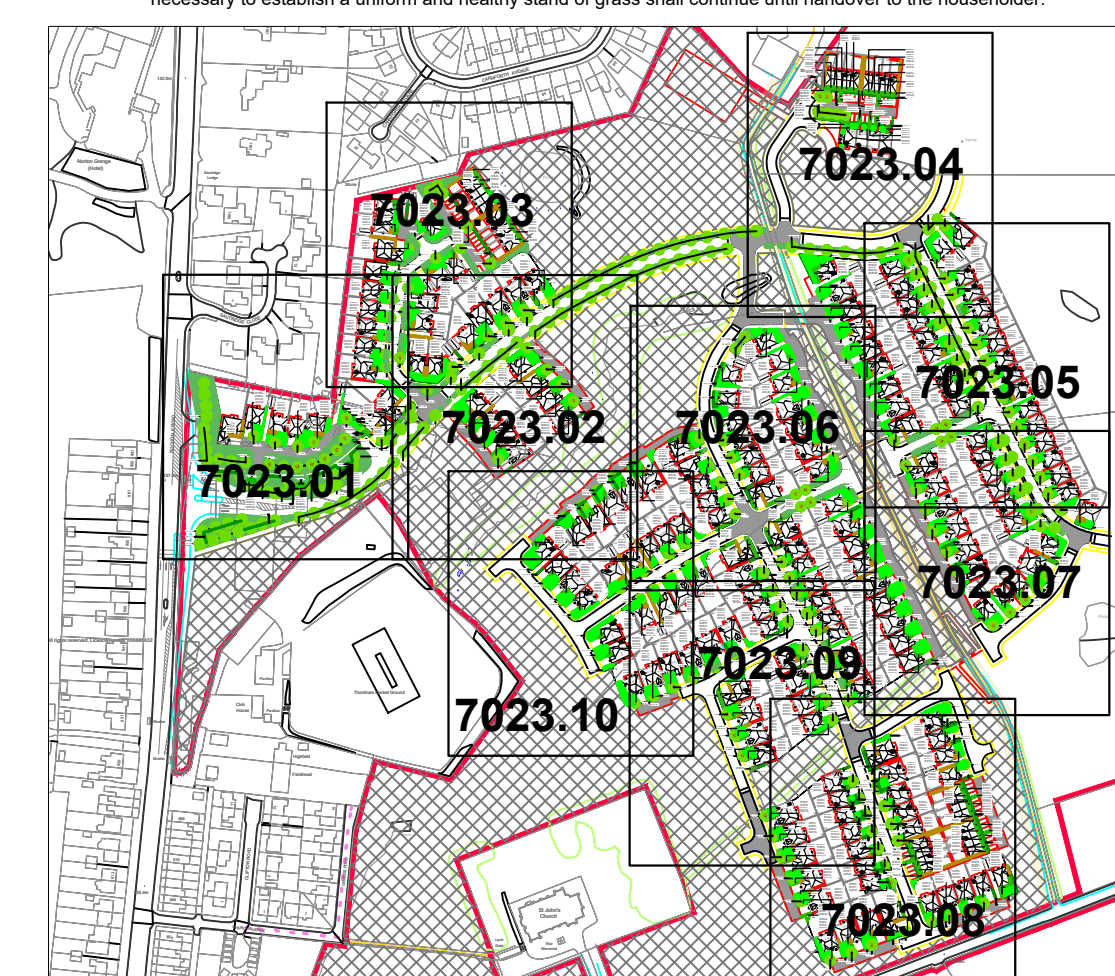

Addition of trees to grass verges		20.03.23	NC	A
© Copyright reserved		Date	Drawn	Rev
 Landscape Architecture Arboriculture Trevor Bridge Associates Ltd Nantor Old Batts Stamford Street West Aston-under-Lyne Lancs OL6 7W Tel: 0161-804 2009 E-mail: info@trevorbridge.co.uk				

Project Stakehill, Middleton			
Redrow Lancashire			
Title Landscape Proposal			
Sheet 7 of 10			
Date Feb '23	Scale(s) 1:200 @ A0	Dwg no 7123.07	Rev A
Dwn NC	Chkd DG		