




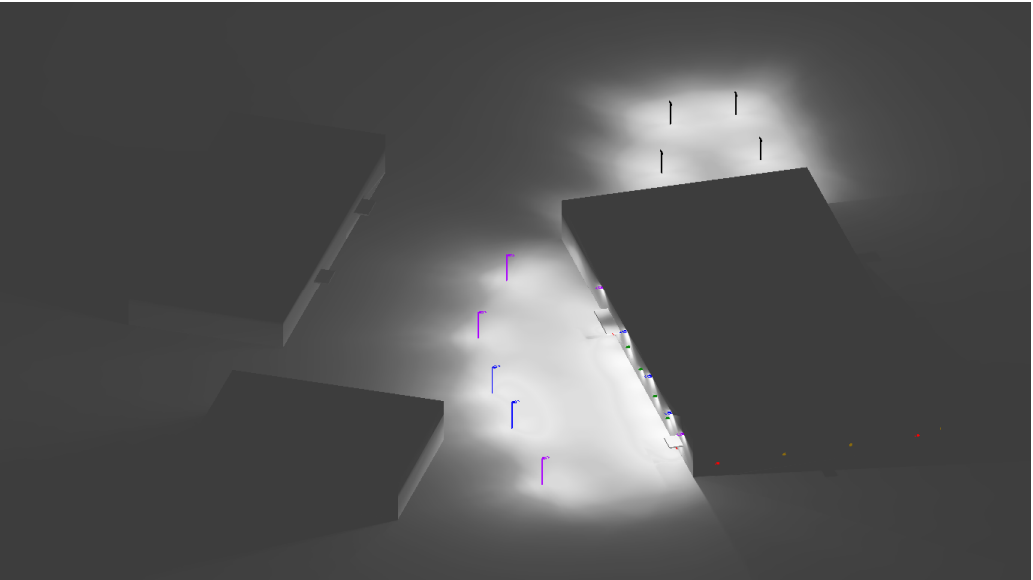


View #1

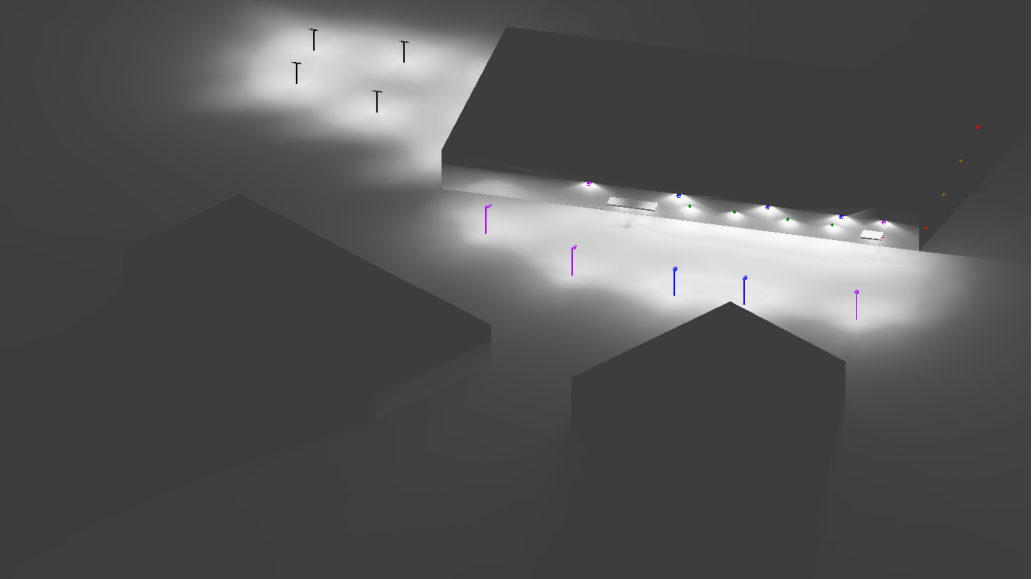

View #2

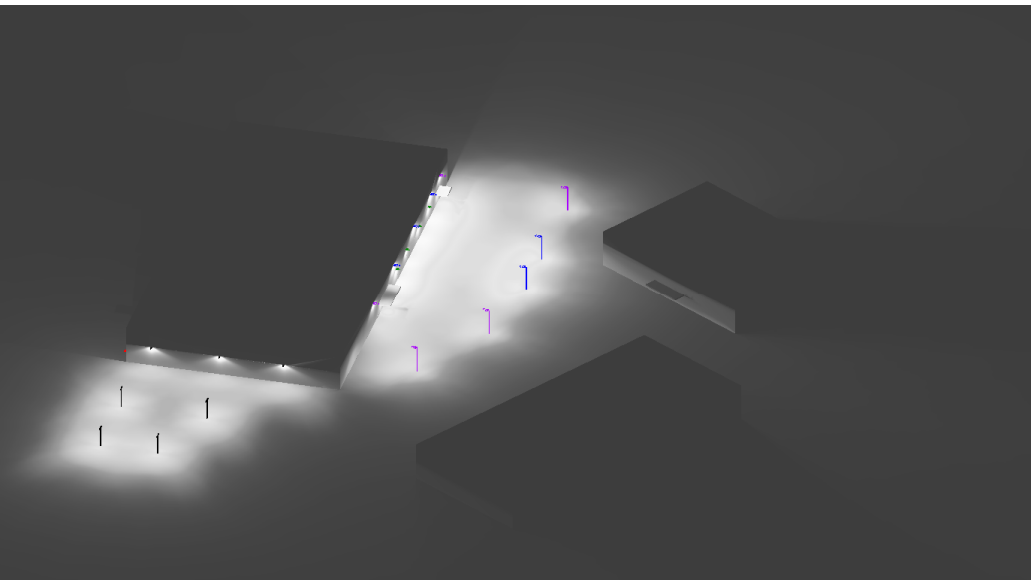

View #3

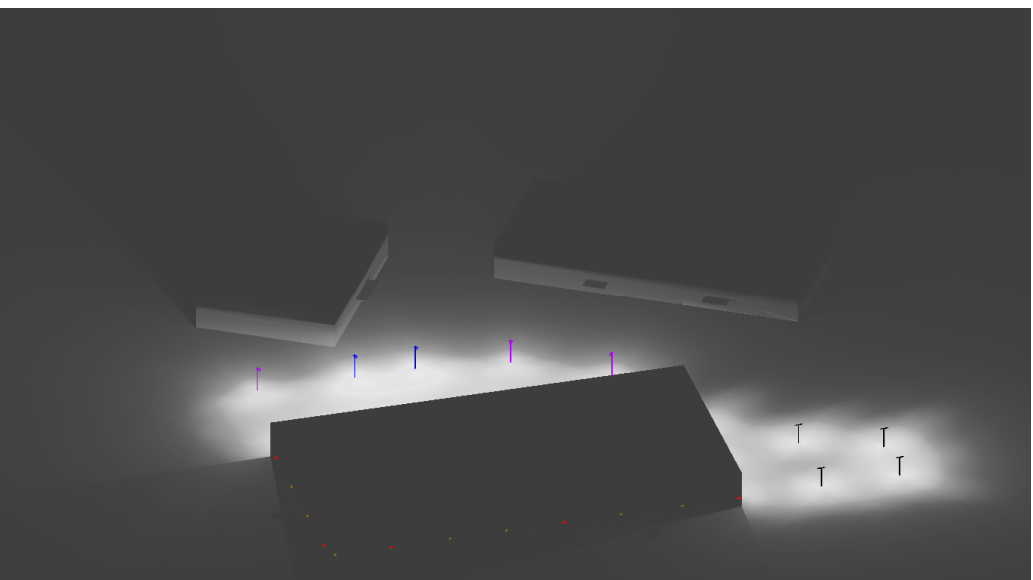

View #4

Statistics						
Description	Symbol	Avg	Max	Min	Min/Avg	
M1 Cycles	+	16 lux	16 lux	15 lux	0.94	
M1 HOV Turning Circle	+	51 lux	72 lux	31 lux	0.61	
M1 Loading	+	82 lux	192 lux	39 lux	0.48	
M1 Loading Bays doors	+	151 lux	205 lux	106 lux	0.70	
M1 Near Pedestrian Route	+	5 lux	13 lux	3 lux	0.40	
M1 Service Yard	+	32 lux	126 lux	13 lux	0.41	
M1 Car Park	+	20 lux	42 lux	6 lux	0.30	

Schedule									
Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Number Lamps	Lumens Per Lamp	Light Loss Factor	Wattage
	B	2	Lighting Project Solutions	OWE 380 740 L35 B096	OWL FLOODLIGHT 96 LED 380W 4000K L35 Optic	1	47524	0.9	380
	BW	3	Lighting Project Solutions	OWE 380 740 L35 B096	OWL FLOODLIGHT 96 LED 380W 4000K L35 Optic	1	47524	0.9	380
	C	3	Lighting Project Solutions	OWE 200 740 L35 B048	OWL FLOODLIGHT 48 LED 200W 4000K L35 Optic	1	23809	0.9	200
	CW	2	Lighting Project Solutions	OWE 200 740 L35 B048	OWL FLOODLIGHT 48 LED 200W 4000K L35 Optic	1	23809	0.9	200
	D2	4	Lighting Project Solutions	MISE 090 740 L35 A024	MINI MARTIN STREET AND TERRITORY LUMINAIRE 24 LED 90w 4000K L35 Optic	1	11152	0.9	180
	DW	3	Lighting Project Solutions	MISE 090 740 L35 A024	MINI MARTIN STREET AND TERRITORY LUMINAIRE 24 LED 90w 4000K L35 Optic	1	11152	0.9	90
	F	4	Lighting Project Solutions	A0150W4KGR	Acom 150W LED floodlight, Asymmetric lens	1	15669	0.9	151.9
	G	7	Lighting Project Solutions	FN/BW/4K/pw/A	Finn LED wall luminaire, Bw, 4000K, Pathway Optic, Finished in Anthracite RAL 7016, IP65, IK10	1	1001	0.9	1
	H	3	Lighting Project Solutions	ACF2X5	ACF2X5 1500mm IP65 Non Corrosive Barfen	1	5492	0.9	36.3
	G/E	5	Lighting Project Solutions	FN/BW/4K/pw/A	Finn LED wall luminaire, Bw, 4000K, Pathway Optic, Finished in Anthracite RAL 7016, IP65, IK10	1	1001	0.9	1



REF A, D2 and DW



REF B, BW, C and CW



REF F



REF G