


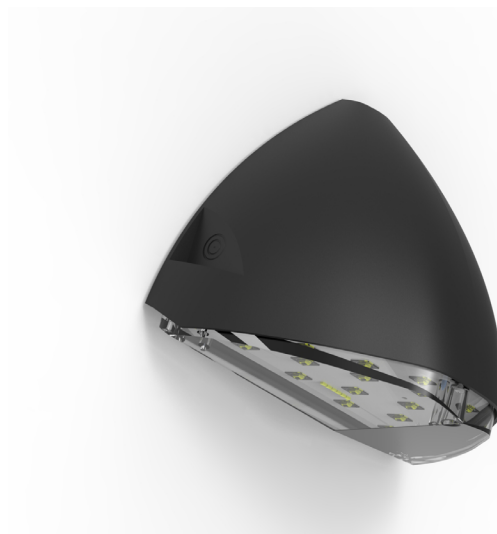

Description

The Finn is a highly efficient modern minimalistic designed wall pack with a range of optics and emergency options.

Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 131 lm/W and will be capable of producing up to 3500 luminaire lumens at 4000K with a CRI >80. It shall be rated at IP65 and IK10.

Benefits




- Tough IP65 and IK10 construction
- Pathway / Open area / Asymmetrical distribution
- DALI driver optional
- 5-year Warranty

Technical Features

Voltage	220-240Vac
Wattage	8 - 28W
Colour	RAL7016 / RAL9002
Luminaire Lumens	1012 - 3500
Efficacy	Up to 131lm/W
Colour Temperature	2700, 3000 - 4000K (4000K standard)
CRI	>80

Life	>60,000 hrs L80
Dimming	Dali optional
Surge Protection	10KV
Operating Temp	-20 to +40°C
Accessories	Photocell / Smart wireless control / Emergency
Applications	Urban, retail, education, and car parks


Dimensions



Pathway 8 - 15W
Lumen output 1012 - 1746
Weight 2.35kg Standard
Weight 2.5kg Emergency

Open area 13/18/28
Lumen output 1700 - 3500
Weight 2.35kg Standard
Weight 2.5kg Emergency

Optics

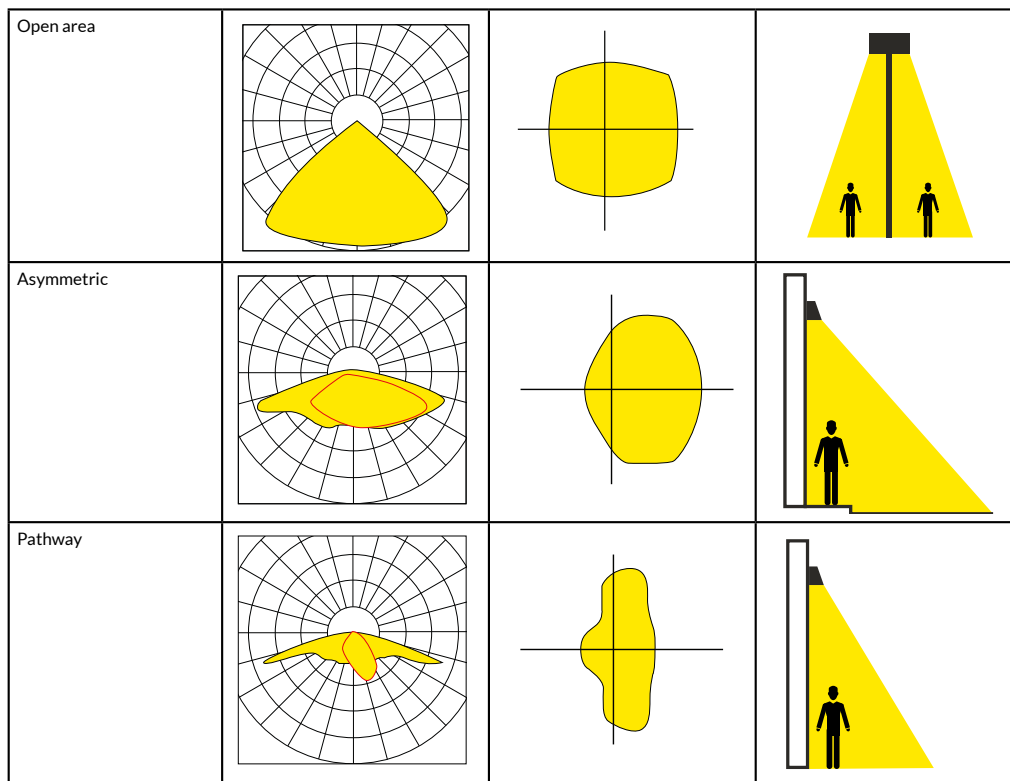

Smart Design


Modern and minimalist design, screw-less from front

Suitable for rear and side cable entry

High quality Samsung LED's

Suitable for conduit and BESA box installation

PCB integrated with diffuser for easy installation

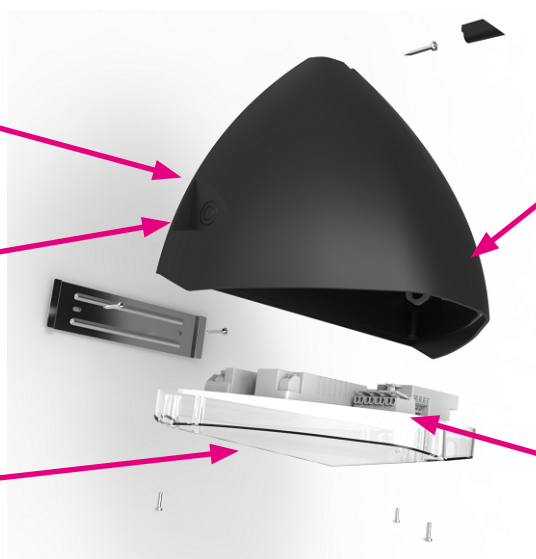

Part Code

Code		FN		FINN	
Code	Wattage	Lumens +/- 5%			
013	13W	1,700			
018	18W	2,353		Open area/	
028	28W	3,500		Asymmetric	
008	8W				
015	15W			Pathway	
Code	Colour Temp				
2.7K	2700K				
3K	3000K				
4K	4000K				
Code Optic					
OA	Open Area				
AS	Asymmetric				
PW	Pathway				
Code	Colour				
A	RAL7016				
GR	RAL 9002				
C	Custom colour (Available upon request)				
Code					
E	Emergency				
Code	Accessories				
N/A	N/A				
P	Photo Cell				
D	DALI				
W	Wireless Communication				
Example	FN	028	4K	OA	A
					E
					P