


Plan:

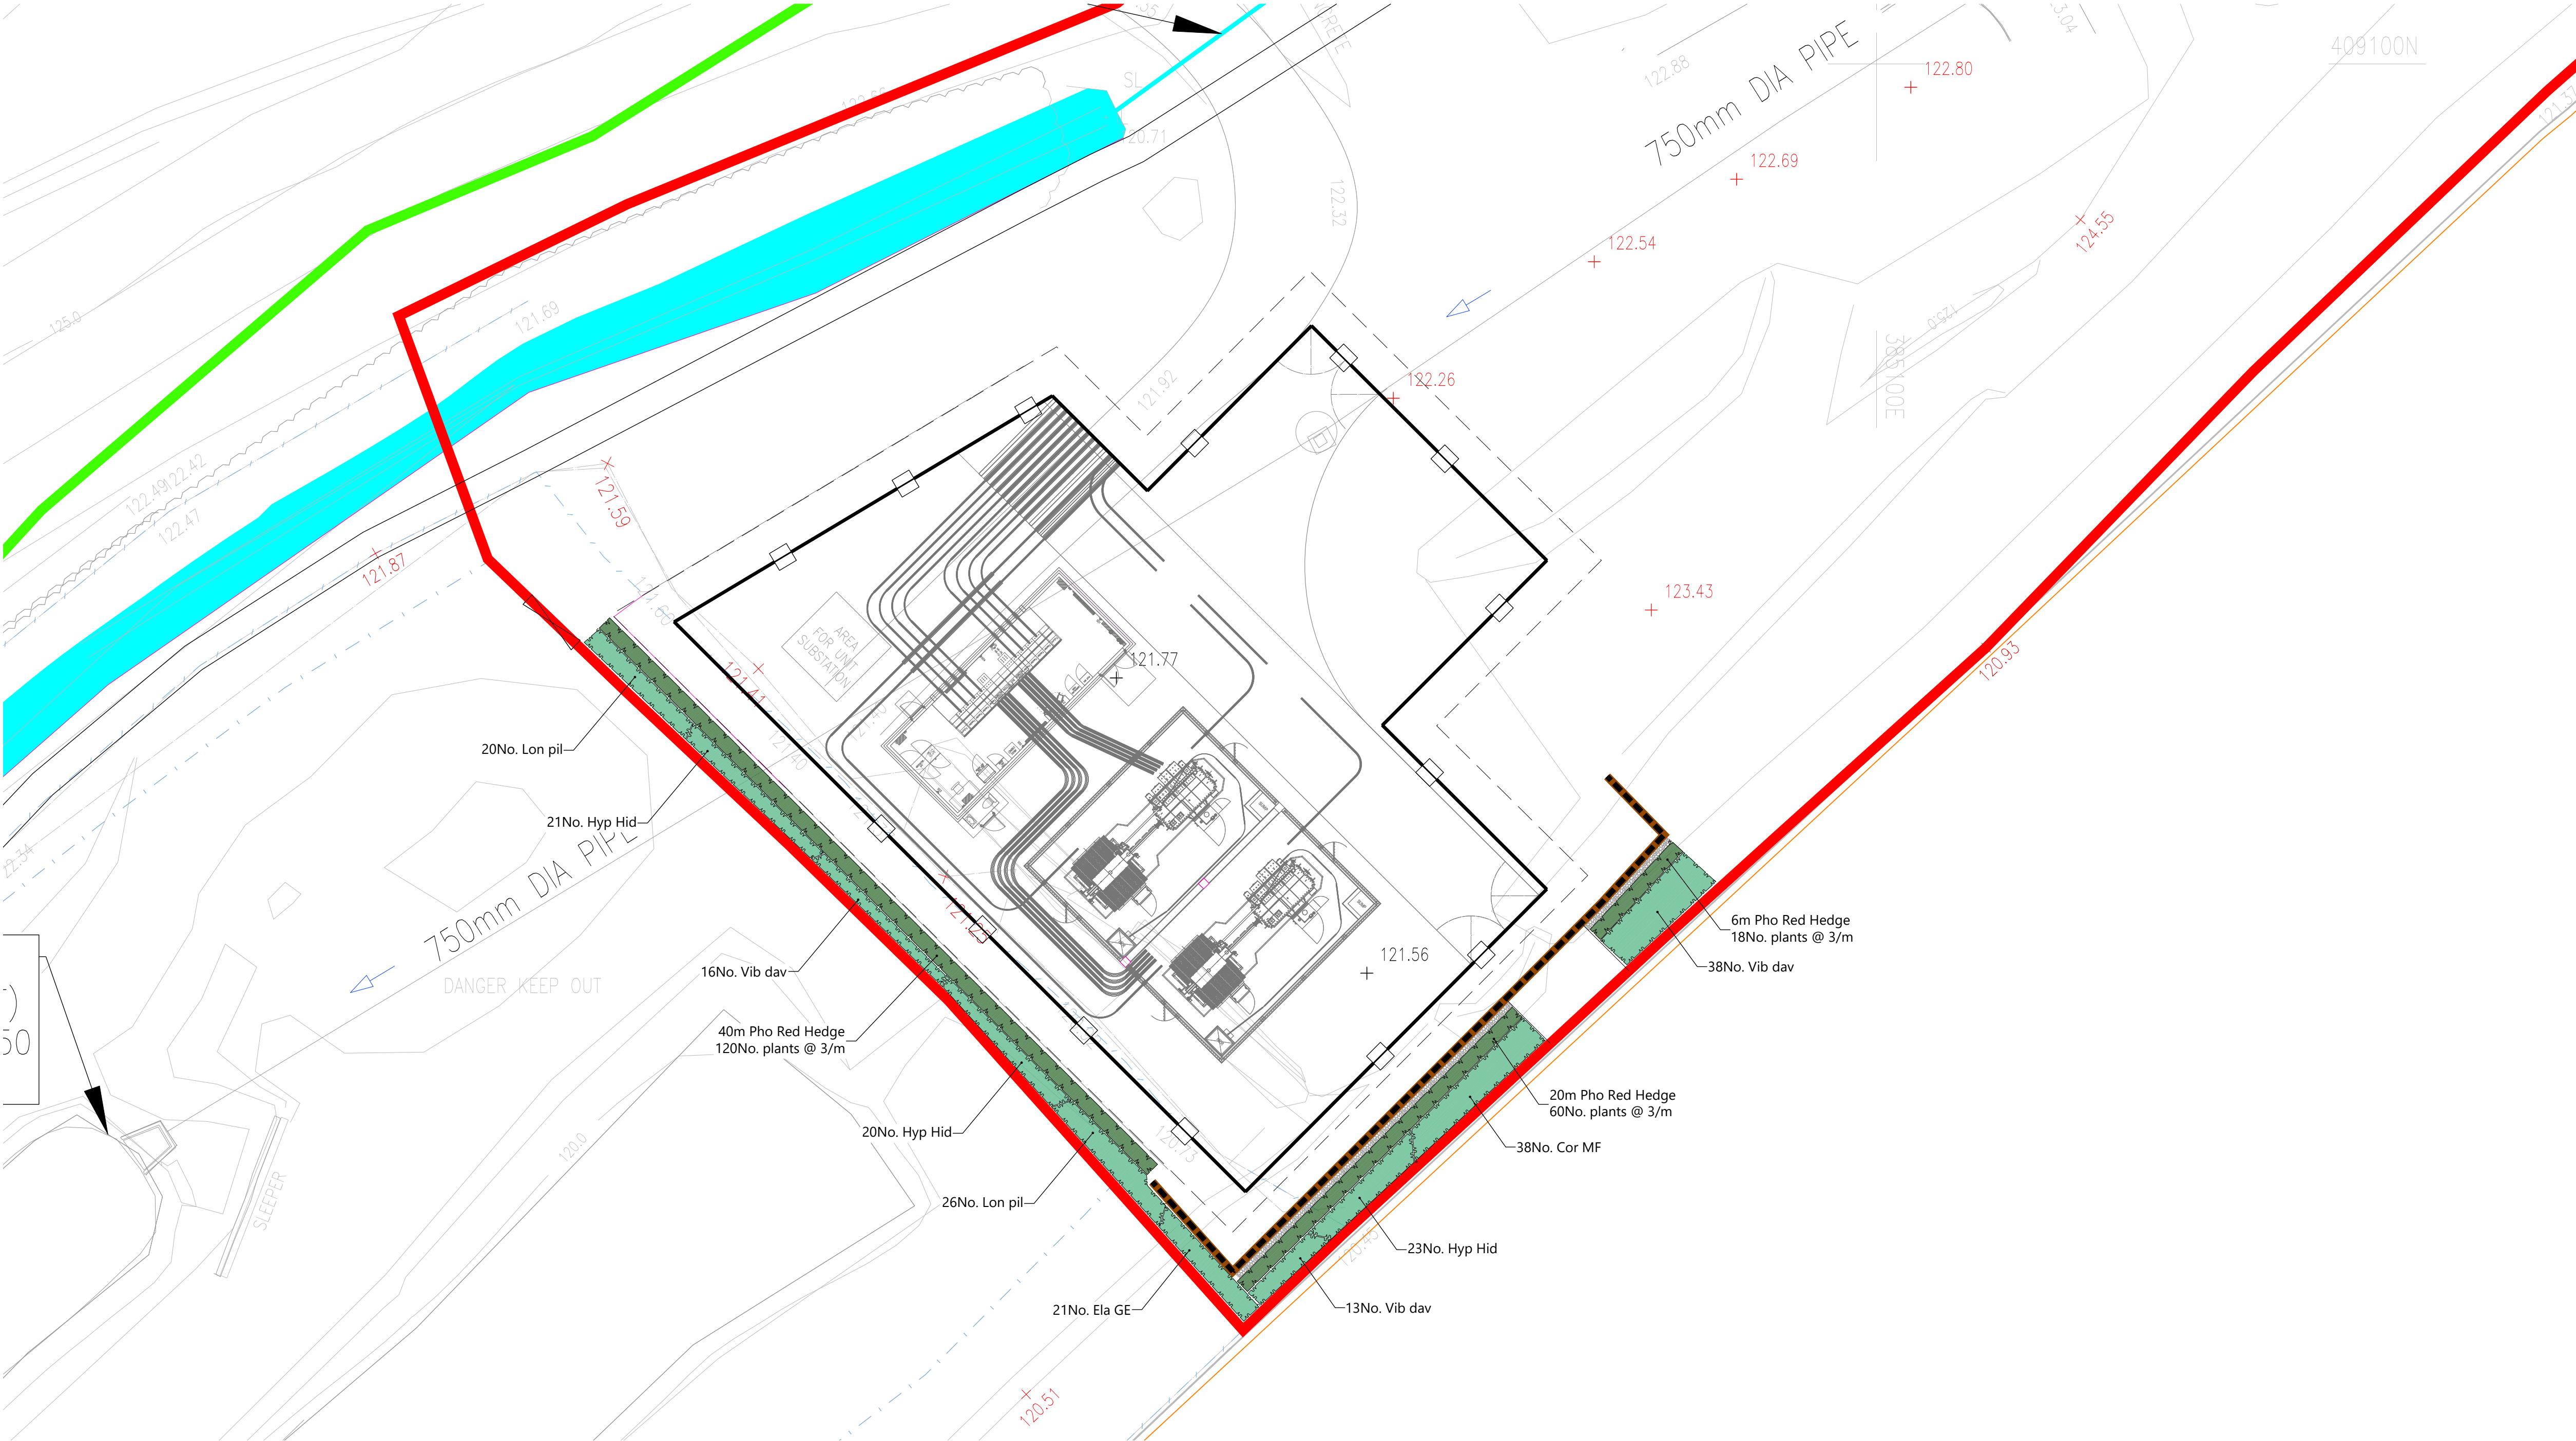

Notes:

Please do not scale from this drawing, either paper or electronic copies.
All final measurements must be checked on site by the contractor.
If there are any discrepancies noted in relation to dimensions or scale, please notify the Landscape Architect.
All works are to be carried out in accordance with the latest British Standards and/or Codes of Practice unless otherwise stated.

This drawing is the property of DAC Landscape Architecture Ltd and must not be copied or reproduced in any way, whole or in part without the permission of the client or DAC Landscape Architecture Ltd. Copyright © of DAC Landscape Architecture Ltd.

Legend:

- Shrub planting**
Stock: 3L container
Density: 3-4 p/m²
- Hedge planting**
Stock: 5L container
Density: 3 p/lin.m
- Retaining wall**
in line with engineers details



Revision Notes:

Rev	Initials	Description	Date
P1	DC	First issue	10/12/24

Client:
South Heywood Commercial Ltd


Project:
South Heywood - Primary Substation

Title:
Planting Proposals

Status: For Approval	Date: 10-12-2024
--------------------------------	----------------------------

Drawing No: 136-DAC-PL-001	Revision: P1
--------------------------------------	------------------------

Scale: 1:200	Paper Size: A1	Drawn by: DC
------------------------	--------------------------	------------------------



**LANDSCAPE
ARCHITECTURE**
Email: info@dacla.co.uk
Tel: 07973823834
Website: www.dacla.co.uk

Planting Schedule:

SHRUBS						
QTY	UNIT	CODE	PLANT NAME	STOCK	SIZE	SPACING
38	No.	Cor MF	Cornus sanguinea 'Midwinter Fire'	C 3L	40-60cm	3/m ²
21	No.	Ela GE	Elaeagnus x ebbingei 'Gilt Edge'	C 3L	40-60cm	3/m ²
64	No.	Hyp Hid	Hypericum 'Hidcote'	C 3L	40-60cm	3/m ²
46	No.	Lon pil	Lonicera pileata	C 3L	30-40cm	3/m ²
67	No.	Vib dav	Viburnum davidii	C 3L	20-30cm	3/m ²

HEDGES						
QTY	UNIT	CODE	PLANT NAME	STOCK	SIZE	
66	m	Pho Red Hedge	Photinia x fraserii 'Red Robin'	C 5L	80-100cm	
198	No.	Plants spaced @ 2/m in a Single Row				

NOTES AND ABBREVIATIONS

C = Container (or pot) grown, followed by size of the container (or pot).
SIZE = Height or Spread of juvenile plant.
STOCK = Root condition/protection method eg Bare root.
- Refer to specification for further information.
- All plants to be completely hardened off
- Substitutions to be agreed with Landscape Architect.
Plant Schedule generated by "Qscape" software 10/12/2024

NOTES ON PLANTING

The following notes set out the principles and minimum standard required for the implementation of all soft landscaping as part of this development.

This planting plan has been specified based on installation being carried out during the planting season (November to March inclusive). If the scheme is to be delivered outside of the planting season, all Bareroot (BR) and Rootballed (RB) stock is to be uplifted to container grown plants.

Site Preparation

- For shrub and hedge planting, the pits should be excavated to a depth of 450mm

Topsoil

- All excavated areas are to be backfilled with Imported topsoil or site won topsoil
- All imported topsoil must be in accordance with BS3882:2015
- It is recommended that site won topsoil should be test in accordance with BS3882:2015 Annex E for suitability for intended use.
- Soil samples to be submitted to the client for review.
- If the topsoil is not compliant, a soil specialist should be consulted to review whether the soil condition can be improved.

Subsoil

- British Standards: To be in accordance with BS9601:2023

Planting

- All proposed species should reflect those indicated on the landscape plans. They should be true to type and be supplied in line with HTA 'National Plant Specification'.
- All planting to be handled, stored, transported and planting in accordance with HTA 'Handling and establishing landscape plants' guidance.
- All plant species are to be watered ahead of installation.
- The planting should be installed at the densities indicated in the plant schedule and in accordance with the layout.
- Any plant substitutions should be agreed with the project Landscape Architect prior to implementation.
- Hedge planting is to be installed offset by circa 300mm from below ground gravel to avoid species drying out.
- Shrubs and transplants to comply with National Plant Specification.
 - Shrub pit size: 300 x 300 x 200mm depth
 - Backfill with 3 litres of peat free tree and shrub compost

Herbicides

- Apply herbicide to topsoil ahead of planting where required.
- Application of herbicide to be in accordance with Control of Pesticides Regulations 1986.
- To be applied by qualified member of staff that are used to controlling such products, and in line with manufacturers instructions.
- Spot treat planting areas during the maintenance period where necessary in line with the manufacturers guidance.

Mulching layer

- All shrubs are to receive 75mm depth medium grade bark mulch.

Implementation Programme

- The ideal time to undertake planting is within the planting season during the months of November to March (inclusive). This is the period when the plants are dormant with bareroot and rootball stock readily available.
- Should the construction programme not allow for this, planting must be carried out at the earliest opportunity during the next planting season.

Watering

- It is imperative that the plants are installed into moist soil and are watered thoroughly after planting. A regular watering regime is important during the establishment period, particularly during the summer months to give the plants the best chance of establishing.
- The trees are to be watered through the irrigation pipes to ensure water gets good access to the rootball.
- Trees are to be watered regularly through the spring to summer months for the first 2 years to give them the best chance of establishing.