Key

- Lawn
- A — Ornamental Shrubs
- Site Boundary
- 1800mm high stained close-boarded timber fence (Refer to NADA Architect detail 18-589-17-001)
- Concrete Flag Paving (Refer to NADA Architect drawing 18-5897-16-001)
- Permeable Tarmac (Refer to NADA Architect drawing 18-5897-16-001)

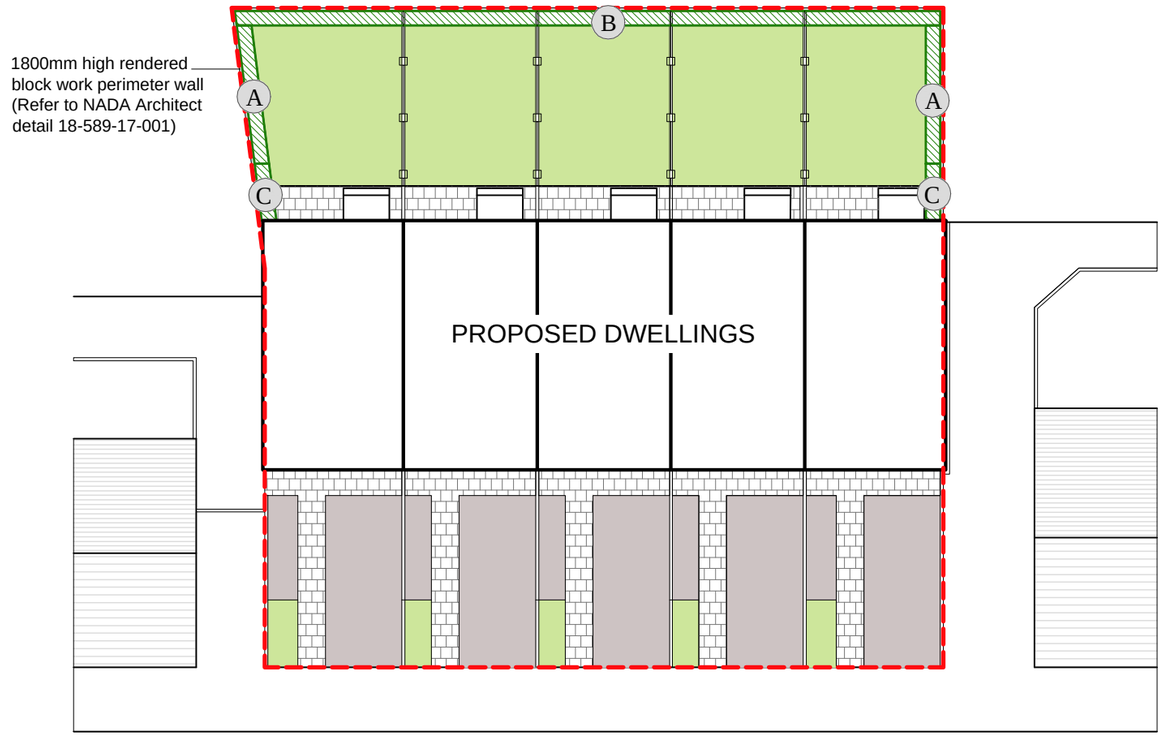

MEDIUM-LOW SHRUB MIX A

AREA 5 m²

Species	Height (cm)	Root	Size/Age	Habit	Breaks	Plants per msq.	Planting Area %	Total No.
Buddleia davidii 'Nanho Blue'	60-80	C	3L	B	7	1	15	1
Euonymus fortunei 'Emerald Gaiety'	30-40D	C	5L	Bu	11	3	15	2
Hebe 'Mrs Winder'	40-60	C	5L	Bu	9	2	25	3
Philadelphus 'Manteau d'Hermine'	40-60	C	5L	B	7	3	25	4
Spiraea bumalda 'Anthony Waterer'	40-60	C	5L	B	9	3	20	3

MEDIUM-LOW SHRUB MIX B

AREA 11 m²

Species	Height (cm)	Root	Size/Age	Habit	Breaks	Plants per msq.	Planting Area %	Total No.
Euonymus fortunei 'Emerald Gaiety'	30-40D	C	5L	Bu	11	3	25	8
Geranium sanguineum 'Album'	-	C	2L	FP	-	3	15	5
Hebe 'Autumn Glory'	30-40	C	3L	Bu	7	3	25	8
Viburnum davidii	40-60	C	5L	Bu	5	2	20	4
Vinca minor 'Atropurpurea'	15-20	C	2L	SSh	-	5	7.5	4
Vinca minor 'Gertrude Jekyll'	15-20	C	2L	SSh	-	5	7.5	4

GROUNDCOVER SHRUB MIX C

AREA 2 m²

Species	Height (cm)	Root	Size/Age	Habit	Breaks	Plants per msq.	Planting Area %	Total No.
Ceanothus thyrsiflorus repens	40-60	C	5L	Bu	7	4	20	2
Hebe 'Red Edge'	30-40	C	5L	Bu	9	4	30	2
Lavandula angustifolia 'Hidcote'	30-40D	C	5L	Bu	11	4	30	2
Potentilla fruticosa 'Abbotswood'	40-60D	C	5L	Bu	7	4	20	2

LANDSCAPE MAINTAINANCE

Site Owner to implement maintainance plan to cover the following regular, seasonal and annual maintenance operations:

Shrubs:
- Remove litter
- Water monthly April to September in periods of drought
- Maintain plant beds weed free
- Remove dead plants
- Trim planting to prevent encroachment onto paths
- Prune planting clear of all signage and sightlines
- Prune beech hedges once annually
- Firm up rocked plants
- Eradicate any occurence of Japanese Knotweed

Plant failures
Replace any dead plants in following planting season (Nov - Mar).

IMPLEMENTATION PROGRAMME:

The scheme of planting, as approved, shall be carried out during the first planting season after the development is substantially completed and the areas which are landscaped shall be retained as landscaped areas thereafter.

Scale 1:200
0 2 4 6 8 10 [m]

OUTLINE SPECIFICATION:

GENERAL
All works to be in accordance all relevant British Standards and the Landscape Consultant's planting plans and specification (to be issued) and in compliance with the National Landscape Specification (NBS) 1998, latest revision.

SETTING OUT
All dimensions and levels should be checked and adjusted on site. Contractor responsible for care around all services. Do not scale from this drawing.

SITE PREPARATION
Building rubble in excess of 50mm dimension to be removed, compaction ripped 150mm deep or broken out by JCB back-actor leaving surface rough. Ensure free drainage.

TOPSOIL
Multipurpose topsoil BS:3882 medium loam, not more than slightly stoney, pH 5.7-7.5.
Depth 450mm all planting areas. 150mm to all other areas.
Provide Declaration of Analysis of topsoil to Employer's Agent.

PREPARATORY HERBICIDE
Weed allowed to grow and treated with up to three applications glyphosate prior to cultivation or planting during the fallow period.

GRASSING
Grassing between April-October.
Cultivate to prepare seed bed. Finished seed bed levels 25mm above pavings and kerb edges. Stones pick to 25mm. Pre-seeding fertiliser 50g/m2. Grass mix chosen for low maintenance requirements:-
GRASS SEED MIX from DLF Trifolium Tel: 01386 791102: LAWN 'Pro 50 Quality lawn (with Ryegrass)'

PLANTS
General
Plant material in accordance with the HTA's National Plant Specification 1997. All plants container grown, well formed and free from disease. Plant handling to CPSE Plant Handling Code.

Quality as supplied by:
Johnsons of Whixley Ltd, York YO26 8AQ. Tel: 01423 330234.
Or other nursery listed in the Horticultural Trades Association Nursery Certification Scheme.

Planting
Plant November to March.
Planting areas cultivated 150 mm deep and stone picked of material greater than 50mm. Plant material pit planted 300 x 300 x 200 minimum. Approved planting compost incorporated into the soil during planting.

Backfill mix	Enmag	P4	Compost
Shrubs	35g	5g	10 litres

Backfill mix (30%) incorporated into topsoil (70%) during planting.

MULCH
Total cover coarse bark mulch to shrub areas, Melcourt Bark Nuggets 75mm deep.

AFTERCARE
24 months aftercare by planting contractor. Including grass cutting, weed, pest and disease control, pruning and watering.

Weed control by residual herbicide to a weed free condition around plants. Spot treat with glyphosate and hand weed as nesessary.

Watering in periods of drought to ensure establishment and continued thriving of planting.

DEFECTS LIABILITY
Twenty-four months on plant material and grass. Replacements in November in year of loss.

ONGOING MAINTENANCE
Any shrubs removed, dying, being severely damaged or becoming seriously diseased within three years of planting shall be replaced by shrubs of a similar size and species to those originally required to be planted.

Based on NADA Architects drawing 18-5897 (16)001 REV C1, Dated 06.04.18

Weddle Landscape Design
LANDSCAPE ARCHITECTURE
ENVIRONMENTAL PLANNING
Mews Studio, Charnwood House, 8 Kenwood Bank, Sheffield S7 1NU
Tel (0114) 250 1181
Fax (0114) 250 1188
www.weddles.co.uk
mail@weddles.co.uk

Job: HOLMES STREET, ROCHDALE

Title: LANDSCAPE MASTERPLAN

scale@A3	drawn	date	job number	number	revision
1:200	PM	NOV 18	867	HSR 01	-