

1

DWGS REF: 27.10.22

ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE BEFORE WORKS COMMENCE AND ANY DISCREPANCIES REPORTED TO THE DESIGN PRACTICE. ALL WORKS TO BE CARRIED OUT TO BUILDING REGULATIONS 15 JUNE 2022 BRITISH AND EU STANDARDS AND CPS

GENERAL SPECIFICATION:

PITCHED ROOFS: $u = 0.15\text{wm}2\text{k}$
 matching tiling at $C.30^\circ$ pitch on 25 x 50 tanalised battens on tyvec venting sarking on 50x100 rafters at 600mm cs 50mm Ecotherm between rafters + SF19 50mm min. vent gap above all insulation 12.7mr gyproc 10 and skim to all soffits cross ventilation to roof void areas maintained with 25mm fascia soffit vents and ridge/ tile vents = to 10mm continuous

EXTERNAL WALLS: $u = 0.18\text{wm}2\text{k}$
 100mm matching brickwork (tile dormers) 100mm cavity with 100 cavitytherm CT100 100mm light block inner leaf plastered stainless steel double drip twist ties at 600 horizontal and 450mm vertical centres dacatie insulated cavity closers to reveals IG lintels to suit load and span for openings matching pvcu doors and window frames 28mm argon double glazed low 'E' units to $u = 1.1\text{wmK}$ - doors, adjacent windows + glazing less than 800mm from floor level in toughened glass to BS:6200 - 6206

INTERNAL WALLS + PARTITIONS:

100mm min.dense concrete block - plastered partitions from 100x50 stud framing with 100 rockwool fill and 12.7mm gyproc 10 + skim

SUSPENDED FIRST FLOORS:

22mm t+g floor grade P5mr(V313) particle board on 50x220 C16 joists at 400mm ctrs with 100mm GP isowool fill and 12.7mm mr gyproc 10 board and skim to all soffits

SOLID GROUND FLOORS: $u = 0.18\text{wm}2\text{k}$

125mm GEN2 concrete on 1200g dpm over and below 100mm kingspan TF100 (25mm perimeter trim) on sand blinded machine compacted crusher in 150mm layers

FOUNDATIONS:

600mm wide x trench fill GEN1 concrete strip minimum 750mm below ground level generally to Building Inspectors satisfaction or design founds if ground trial unsuitable

DRAINAGE:

matching s/water and foul drains to existing adjacent systems - drainage investigated and layout agreed with Building Inspector

VENTILATION:

8Kmm sq.trickle head vents to windows opening sashes minimum 1/20th relevant room floor area

MV15/30/60 = mech.extract in litres/sec.

RESTRAINT:

32 x 5ms cranked wallplate holddown and roof/wall/floor restraint straps at 1.5m ctrs

FIRE PROTECTION:

provide wireless interlinked hardwired battery backup smoke detectors within 3 metres of bedroom doors and ground floor hallway + heat detector to kitchen ES = escape sash 450mm x 750mm min. cill to be 800 - 1100mm from floor level

ELECTRICAL WORKS:

carried out to BS:7671.2018(18th.ed) and be installed and tested by a competent person (at least City & Guilds 2391) a test certificate will be required by the Local Authority

PROPOSED EXTENSIONS

Wayne & Jenny
71 Shelfield Lane

NORDEN OL11 5XY

mike palmer design 01772 743700

front

rear

east side

CONSERVATORY

DINE KITCHEN

LOUNGE

FRONT ENTRY

ground floor

BATH

BEDROOM

DOWN

BEDROOM

BEDROOM


first floor

EXISTING

1 ... 100

AT A3

0 5 10m

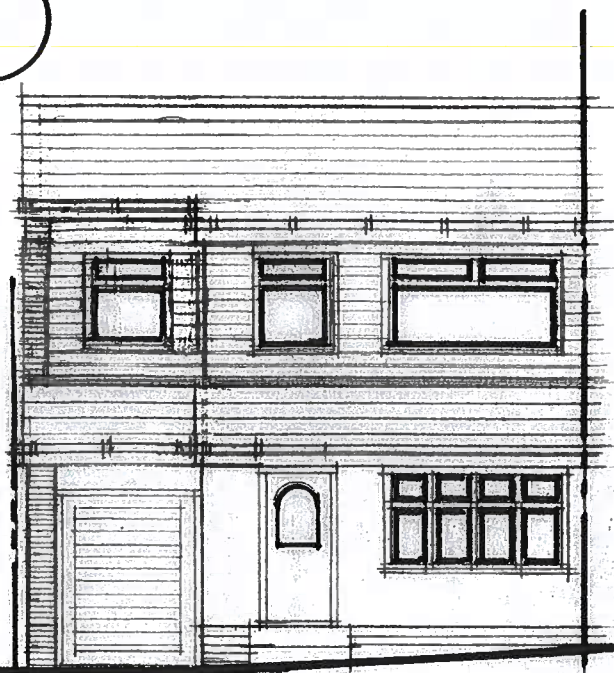


u/o door

front




ali. bi-fold doors

rear

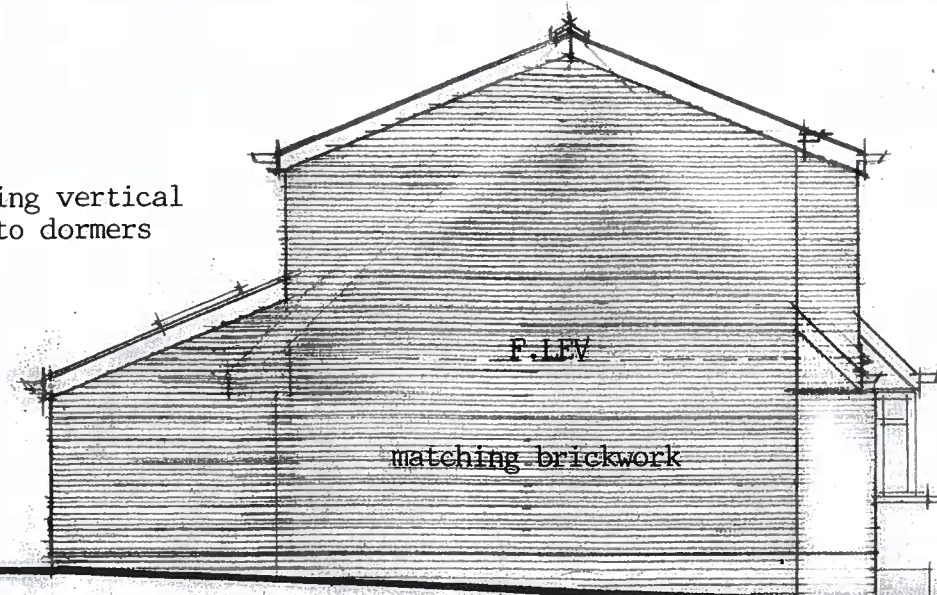


matching brickwork

east side

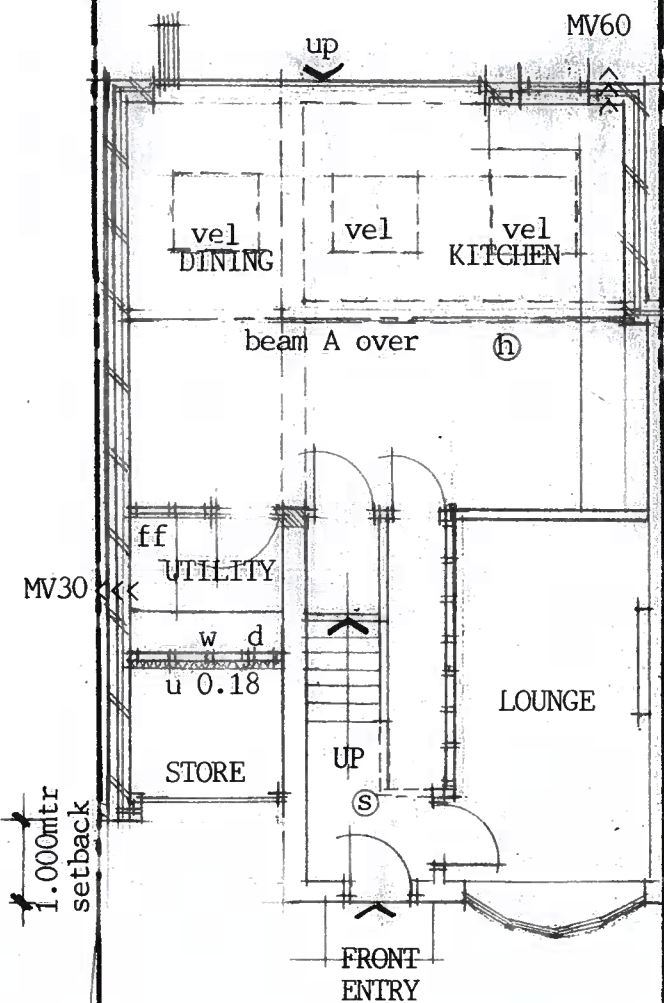1.000m
setback

ground floor

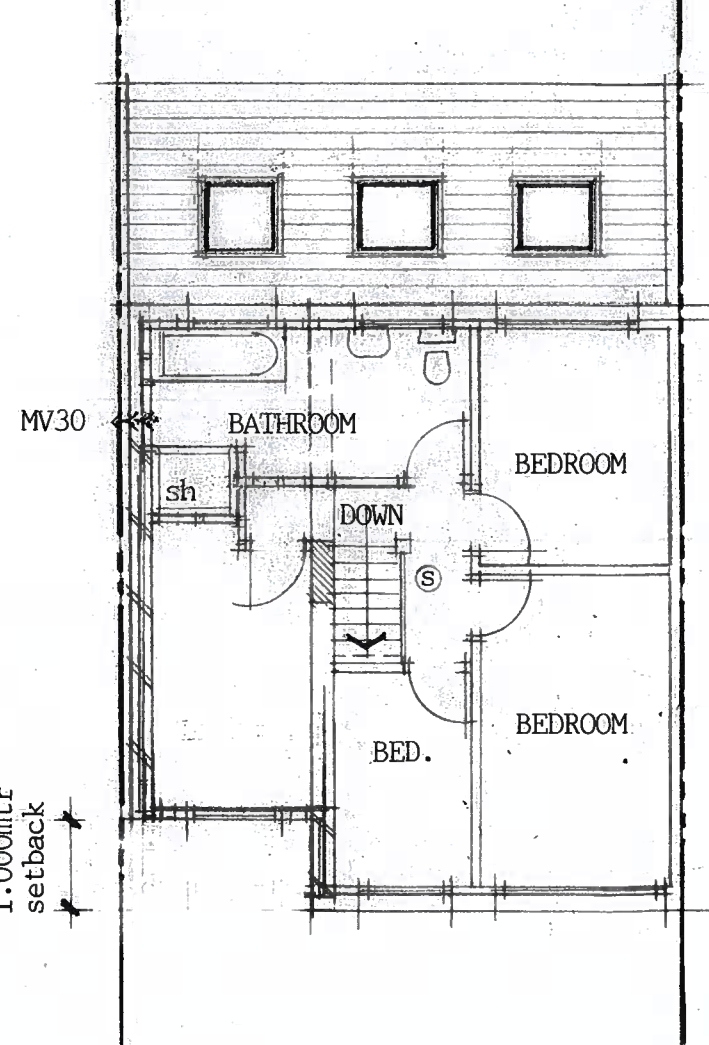

first floor

DWGS REF: 27.10.22

ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE BEFORE WORKS COMMENCE AND ANY DISCREPANCIES REPORTED TO THE DESIGN PRACTICE. ALL WORKS TO BE CARRIED OUT TO BUILDING REGULATIONS 15 JUNE 2022 BRITISH AND EU STANDARDS AND CPS

GENERAL SPECIFICATION:

PITCHED ROOFS: $u = 0.15\text{wm}2\text{k}$

matching tiling at $C.30^\circ$ pitch on 25 x 50 tanalised battens on tyvec venting sarking on 50x100 rafters at 600mm cs 50mm Ecotherm between rafters + SF19 50mm min. vent gap above all insulation 12.7mr gyproc 10 and skim to all soffits cross ventilation to roof void areas maintained with 25mm fascia soffit vents and ridge/ tile vents = to 10mm continuous

EXTERNAL WALLS: $u = 0.18\text{wm}2\text{k}$

100mm matching brickwork (tile dormers) 100mm cavity with 100 cavitytherm CT100 100mm light block inner leaf plastered stainless steel double drip twist ties at 600 horizontal and 450mm vertical centres dacatie insulated cavity closers to reveals IG lintels to suit load and span for openings matching pvcu doors and window frames 28mm argon double glazed low 'E' units to $u = 1.1\text{wmK}$ - doors, adjacent windows + glazing less than 800mm from floor level in toughened glass to BS:6200 - 6206

INTERNAL WALLS + PARTITIONS:

100mm min.dense concrete block - plastered partitions from 100x50 stud framing with 100 rockwool fill and 12.7mm gyproc 10 + skim

SUSPENDED FIRST FLOORS:

22mm t+g floor grade P5mr(V313) particle board on 50x220 C16 joists at 400mm ctrs with 100mm GP isowool fill and 12.7mm mr gyproc 10 board and skim to all soffits

SOLID GROUND FLOORS: $u = 0.18\text{wm}2\text{k}$

125mm GEN2 concrete on 1200g dpm over and below 100mm kingspan TF100 (25mm perimeter trim) on sand blinded machine compacted crusher in 150mm layers

FOUNDATIONS:

600mm wide x trench fill GEN1 concrete strip minimum 750mm below ground level generally to Building Inspectors satisfaction or design founds if ground trial unsuitable

DRAINAGE:

matching s/water and foul drains to existing adjacent systems - drainage investigated and layout agreed with Building Inspector

VENTILATION:

8Kmm sq.trickle head vents to windows opening sashes minimum 1/20th relevant room floor area

MV15/30/60 = mech.extract in litres/sec.

RESTRAINT:

32 x 5ms cranked wallplate holddown and roof/wall/floor restraint straps at 1.5m ctrs

FIRE PROTECTION:

provide wireless interlinked hardwired battery backup smoke detectors within 3 metres of bedroom doors and ground floor hallway + heat detector to kitchen ES = escape sash 450mm x 750mm min. cill to be 800 - 1100mm from floor level

ELECTRICAL WORKS:

carried out to BS:7671.2018(18th.ed) and be installed and tested by a competent person (at least City & Guilds 2391) a test certificate will be required by the Local Authority

PROPOSED

EXTENSIONS

Wayne & Jenny

71 Shelfield Lane


NORDEN OL11 5XY


mike palmer design 01772 743700

PROPOSED

1 .. 100


AT A3



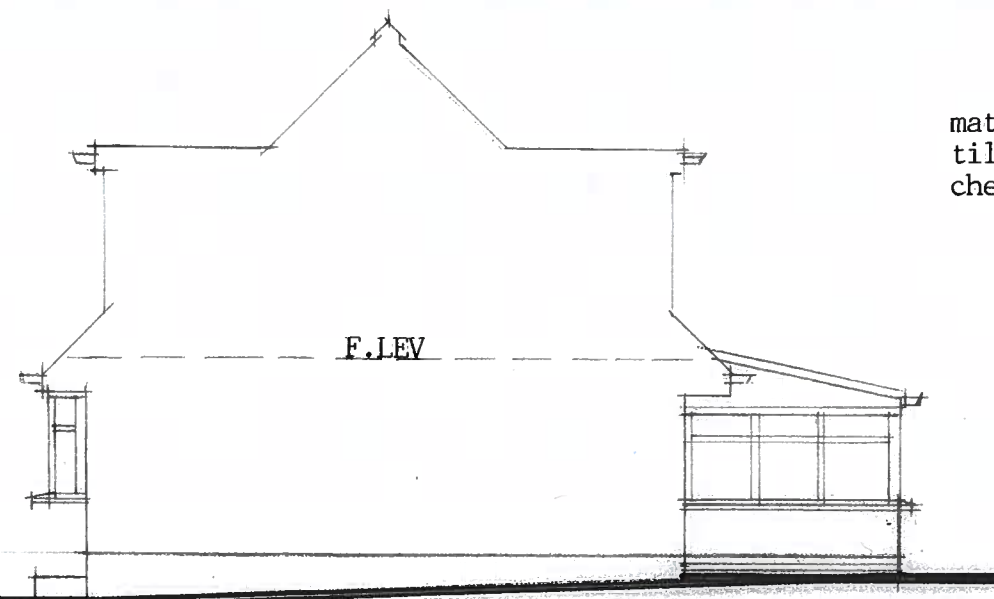

existing west side


matching vertical---
tile to dormer
cheeks

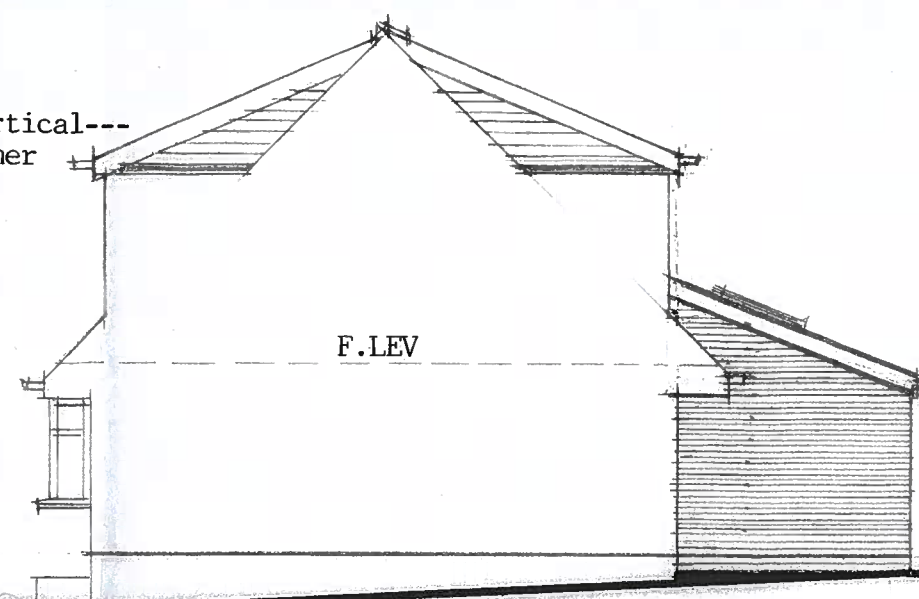

proposed west side

1 . . . 100

AT A3



DWGS REF: 27.10.22

ALL DIMENSIONS AND LEVELS TO BE
VERIFIED ON SITE BEFORE WORKS
COMMENCE AND ANY DISCREPANCIES
REPORTED TO THE DESIGN PRACTICE.
ALL WORKS TO BE CARRIED OUT TO
BUILDING REGULATIONS 15 JUNE 2022
BRITISH AND EU STANDARDS AND CPS

GENERAL SPECIFICATION:

PITCHED ROOFS: $u = 0.15\text{wm}^2\text{k}$
matching tiling at C.30° pitch on
25 x 50 tanalised battens on tyvec venting
sarking on 50x100 rafters at 600mm cs
50mm Ecotherm between rafters + SF19
50mm min. vent gap above all insulation
12.7mr gyproc 10 and skim to all soffits
cross ventilation to roof void areas
maintained with 25mm fascia soffit vents
and ridge/ tile vents = to 10mm continuous

EXTERNAL WALLS: $u = 0.18\text{wm}^2\text{k}$
100mm matching brickwork (tile dormers)
100mm cavity with 100 cavitytherm CT100
100mm light block inner leaf plastered
stainless steel double drip twist ties at
600 horizontal and 450mm vertical centres
daccatie insulated cavity closers to reveals
IG lintels to suit load and span for openings
matching pvcu doors and window frames
28mm argon double glazed low 'E' units to
 $u = 1.1\text{wm}^2\text{K}$ - doors, adjacent windows +
glazing less than 800mm from floor level
in toughened glass to BS:6200 - 6206

INTERNAL WALLS + PARTITIONS:

100mm min.dense concrete block - plastered
partitions from 100x50 stud framing with 100
rockwool fill and 12.7mm gyproc 10 + skim

SUSPENDED FIRST FLOORS:

22mm t+g floor grade P5mr(V313) particle
board on 50x220 C16 joists at 400mm ctrs
with 100mm GP isowool fill and 12.7mm mr
gyproc 10 board and skim to all soffits

SOLID GROUND FLOORS: $u = 0.18\text{wm}^2\text{k}$

125mm GEN2 concrete on 1200g dpm over
and below 100mm kingspan TF100 (25mm
perimeter trim) on sand blinded machine
compacted crusher in 150mm layers

FOUNDATIONS:

600mm wide x trench fill GEN1 concrete
strip minimum 750mm below ground level
generally to Building Inspectors satisfaction
or design founds if ground trial unsuitable

DRAINAGE:

matching s/water and foul drains to existing
adjacent systems - drainage investigated
and layout agreed with Building Inspector

VENTILATION:

8Kmm sq.trickle head vents to windows
opening sashes minimum 1/20th relevant
room floor area

MV15/30/60 = mech.extract in litres/sec.

RESTRAINT:

32 x 5ms cranked wallplate holddown and
roof/wall/floor restraint straps at 1.5m ctrs

FIRE PROTECTION:

provide wireless interlinked hardwired
battery backup smoke detectors within
3 metres of bedroom doors and ground
floor hallway + heat detector to kitchen
ES = escape sash 450mm x 750mm min.
cill to be 800 - 1100mm from floor level

ELECTRICAL WORKS:

carried out to BS:7671.2018(18th.ed) and be
installed and tested by a competent person
(at least City & Guilds 2391) a test certificate
will be required by the Local Authority

PROPOSED**EXTENSIONS**

Wayne & Jenny

71 Shelfield Lane

NORDEN OL11 5XY

mike palmer design 01772 743700