ALICE


ALICE LED FL IP65 100W 840 96666076

LED Floodlight

Very lightweight, compact and streamline design.Universal mounting bracket allows wall or surface mounting with the possibility of tilting upwards or downwards. Pre-wired with 100 cm long mains cable and open cable ends with 1mm² cross section.
Materials:
Glass: Tempered glass
Reflector: Aluminium
Cover: Aluminum die-cast
Mounting bracket: Aluminum die-cast
Complete with 4000K LED, 8000lm. Class I electrical, IP65, IK08.
Luminaire efficacy: 80 lm/W
Colour Rendering Index min.: 80
Rated median useful life: 35.000h L70B50 at 25°C
Weight: 3.8 kg




TE_ALICE_F_360.jpg

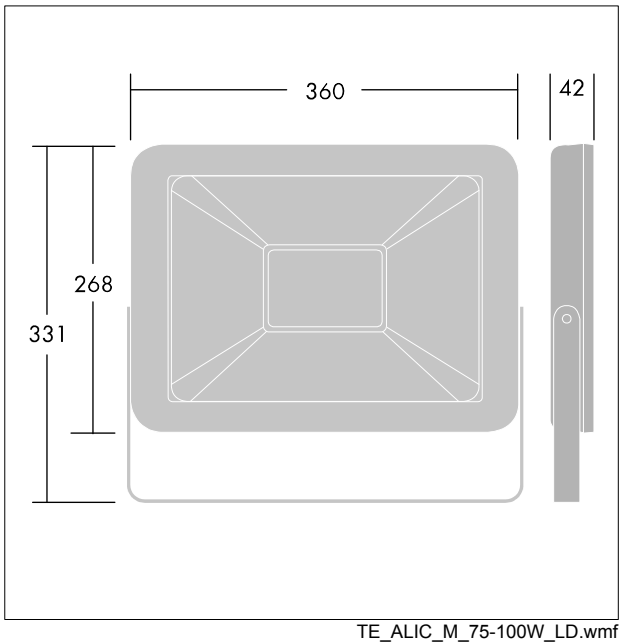

TE_ALIC_M_75-100W_LD.wmf

Light Distribution STD - standard

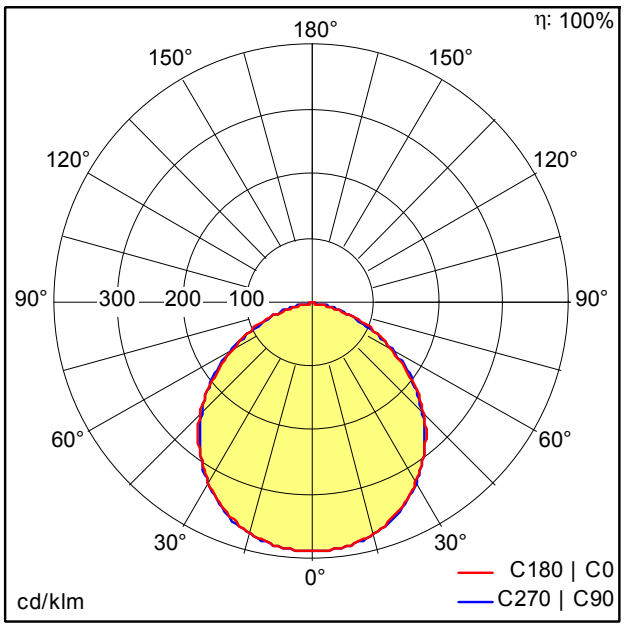

TE_ALICE_LED_FL_IP65_100W_840.ldt

- Light Source: LED
- Luminaire luminous flux*: 8008 lm
- Luminaire efficacy*: 80 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)*: 6
- Rated median useful life*:
  35000h L70 at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 100 W Lambda = 0.9

RoHS IP65 IK08 650°C Ta -20 +40

We reserve the right to make technical changes without prior notice. 20.08.2018 © ThornEco