


I Sub Sta

ire Station




Plant Schedule


Trees					
Abbreviation	Species	Height	Girth	Specification	Pot Size
MKC	Malus domestica 'Keswick Codlin'			Half Standard: 3x	RB
MDL	Malus domestica 'Laxton Supurb'			Half Standard: 3x	RB
ACST	Acer campestre 'Street Wise'	350-425cm	12-14cm	Heavy Standard: 3x	B
SJR	Sorbus 'Joseph Rock'	350-425cm	12-14cm	Heavy Standard: 3x	B
					Total: -6 -




Proposed heavy standard tree planting




Proposed fruit tree planting



Proposed hedge planting



Proposed ornamental shrub/specimen planting



Grass - turf

Specimens					
Abbreviation	Species	Specification	Height	Pot Size	Density
JVS	Juniperus virginiana 'Skyrocket'		80-100cm	7.5L	Counted
PTB	Phormium 'Bronze Baby'	Double Crown		7.5L	Counted
PTV	Phormium tenax 'Variegatum'	Double Crown		7.5L	Counted



SPECIFICATION

GROUND PREPARATION - GENERAL.

Preparing for topsoiling
Grading and cultivation shall be in accordance with BS 4428:1989 section 4. Subsoil that is to receive topsoil shall, whether obviously overcompacted or not, be thoroughly broken up by hand, by heavy rollers, by subsoiler or tines, by equipment with adequate passes made to thoroughly break up the surface to a depth of 150mm, cleared of all large stones, weeds, perennial weeds, tree roots (excluding live tree roots), coarse vegetation and other extraneous matter.

Subsoil grading
Subsoil shall only be graded after loosening as above, and this shall be undertaken by the use of a tractor and blade grader on large areas and by a small mechanical grader or by hand on small areas. Ground shall at no time be traversed by heavy machinery, for grading or any other purpose after subsoiling and/or topsoiling has taken place.

Making up levels

When subsoil is deposited in low lying areas to raise formation levels, it shall be lightly consolidated and left broken up ready to receive topsoil. All material shall be natural subsoil free from metal, concrete or organic material with any one dimension greater than 100mm. All imported fill material shall be approved by the Landscape Architect prior to spreading on site.

Supply of topsoil

Topsoil to be supplied shall be provided in accordance with the Landscape Architect and details of the source of supply shall be approved in order that inspection may be made before delivery commences. Topsoil shall conform to BS 3882: 2015. Recommendations and classification for topsoil, clause 4.1a. The soil shall be free of weeds, roots or perennial weeds, peats, diseases, debris, tree roots, sticks, subsoil and foreign matter and shall be capable of being broken down to a fine tith. The developer/contractor should satisfy themselves that where topsoil is imported that this should be in accordance with BS 3882:2015. Appropriate testing shall be undertaken and test certificates shall be provided.

Temporary topsoil heaps

The depositing of temporary heaps of topsoil shall be so arranged that possible damage to existing grass, plants, tarmac/adam, paving etc. is avoided. Unless otherwise agreed by the Landscape Architect, temporary soil heaps shall be on protected ground. Such protection shall take the form of tarpaulins, plastic sheets, boards or similar covering. If damage does occur, it shall be made good at the contractor's own expense. Areas excavated to receive topsoil but have not had the base loosened shall not be used as temporary off loading areas. If the bottom of the excavation has been loosened off, loading on these areas is permissible.

Spreading topsoil

Prior to topsoil replacement the formation level shall be cleared of all stones, rubbish, debris with any one dimension greater than 75mm. Areas to be seeded or turfed shall be covered by topsoil 100mm thick and areas to be planted shall be covered by topsoil 400mm thick. Topsoil shall be spread in an evenly consolidated layer and shall be left cleared of roots, stones and debris with any one dimension greater than 50mm throughout its depth. Unless otherwise stated the finished level shall be 25mm above adjacent hard areas. No topsoil shall be spread until the subsoil grade has been approved by a Landscape Architect.

PLANTING

Cultivation
Planting areas shall be rotavated to a depth of 225mm in the original ground, or where the ground is compacted, ripped and rotavated.
Pick off stones, bricks, timber and all other debris arising which have any dimensions greater than 50mm and remove off site to tip. Do not cultivate across any drain where the stone is flush with the ground surface.

Soil improvers

Where directed composts, fertilisers or other additives shall be incorporated into the soil. Spent mushroom compost or similar shall be spread to the specified thickness and incorporated, by rotavating, into the top 150mm. Fertilisers, organic or inorganic, shall be raked into the top 25mm.

Rejection of plants

All plant material should comply with the minimum requirements in BS 3936-1: 1992 Specification for trees and shrubs and BS 3093-4: 2007 Specification for forest trees. Any plant material, which in the opinion of the Landscape Architect, does not meet the requirements of the Specification, or is unsuitable, or defective in any other way, will be rejected. The minimum specified sizes in the planting schedule will be strictly enforced. The contractor shall replace all plants rejected at its own cost.

Planting

All plant material shall generally be planted between November and March in open cool weather. Planting shall not take place in frosty, snowy or waterlogged conditions. Where approved, pot or container grown plants may be planted outside the described season, but adequate watering shall be supplied. Torn or damaged roots and branches shall be clearly pruned prior to planting.

Planting of whips, transplants and shrubs

The nature of the material to be planted is variable and the contractor shall allow for planting to be properly carried out in all cases as described in BS 4428: 1989 section 7. Anemity tree planting, section 8. Woodland planting and section 9. Planting of shrubs, herbaceous and bulbs. All plants shall be planted at same depth, or very slightly deeper, as they were grown. Roots shall not be bent, broken or forced into inadequate pits or root-holes. Plants shall be planted in and wind resistant, with no air pockets around roots. Plants shall be planted at the specified centres. On steep slopes this shall be the horizontal measure. Transplants shall be planted with spiral guard and cane to protect from rabbits and to hold the plant securely. Plants forming a hedge shall be cut by one third immediately upon completion of planting. All pots and root wrappings shall be carefully removed prior to planting. All pots and wrappings arising shall immediately be picked up and stored ready for removal to tip.

Tree planting within soft landscape areas

Trees shall conform to BS 845:2014 Trees from nursery to independence in the landscape and BS 3936-1: 1992 and be planted in tree pits of the following sizes unless directed otherwise:
Feathered trees - 900 x 900 x 450
Selected standards - 1000 x 1000 x 600
Heavy standards/Extra heavy standards - 1200 x 1200 x 600
Excavated subsoil or stone shall be carted off site to tip. The bottom 200mm of the pit shall be dug and broken up. The bottom of the pit shall be backfilled with subsoil (ate or imported) to comply with BS 8601: 2013. The top 300mm of the pit shall be backfilled with imported topsoil as specified unless directed otherwise.

Compost for planting pits

Compost shall be a proprietary product, bark based incorporating fertilisers and improving additives. The type of compost shall be approved before its delivery on site, and the details of the product shall be supplied. Compost planting compost is approved. Where directed compost shall be added to and mixed with topsoil.
Feathered trees - 40 litres
Selected standards - 60 litres
Heavy standards/Extra heavy standards - 80 litres

Stakes for trees

Stakes shall be peeled round softwood, pointed, minimum diameter 75mm. The stakes shall be driven into the base of the tree pit prior to placing the tree and backfilling. Stakes shall in general have a clear height above the finished ground level as follows unless directed otherwise:
Feathered trees - 750mm (one tie)
Selected standards - 900mm (2 stakes, one tie each)
Heavy standards/Extra heavy standards - 1200mm (2 stakes, one tie each)
The stake shall be long enough to drive until they hold the tree firmly without rocking.

Tree ties

Ties for bareroot trees, shall be approved rubber nail-on type with cushioned spacer such as Toms, or other equal and approved. Nails shall be flat headed galvanised and shall hold the tie securely into the stake. Ties shall not be over tight on the tree stems. Ties available from J Toms Limited, Wheeler Street, Headcorn, Ashford, Kent, TN27 9SH.
Feathered Type - 04 (one tie)
Select standards - Type L1 (one tie per stake)
Heavy standards/Extra heavy standards - Type L3 (one tie per stake)
Ties for rootball and container grown trees shall be 50mm rubber tree belts in a figure of eight around the tree. Tied to the stake with two flat head galvanised nails.
Feathered - one belt
Heavy standards - two belts
Heavy standards/Extra heavy standards - two belts

Planting of trees

The tree shall be set upright and at the same depth as grown in the nursery, the roots shall be spread out (bareroot) and the suol followed by compost topsoil mixture, backfilled. Backfilling should be done to ensure close contact between roots and by firming in layers (bareroot). The soil shall be left level and tily, any subsoil clods, bricks or stones over 50mm arising, collected and carted off site.

Mulching

A 75mm compacted layer of medium grade pulverised bark, with a particle size of not more than 100mm and containing no more than 10% fines, shall be spread to form a continuous layer covering the whole of the bed, or in the case of standard trees within grass shall be in the form of a circle of 600mm diameter around the base of the tree. Whips and transplants shall be mulched in the form of a 300mm diameter circle around the base of the tree. Where trees are planted within grass a circular hemp mulch mat is required beneath the layer of mulch at the diameters stated above, secured with fixing pegs. The tree pit surface shall be as big as possible.

TURFING

Soil preparation and cultivation

All areas to be turfed shall be cultivated to a depth of at least 100mm, all weeds, stones and refuse larger than 50mm shall be removed to Contractor's tip, and shall be brought to a fine tith. Allow for hand cultivation where machine work is not possible.

Turf

Turf shall be extra-quality meadow turf and shall comply to BS 3969: 1998 +A1: 2013 and shall be laid in accordance with BS 4428: 1989 section 5. Turfing. The Contractor shall supply a sample of the turf he proposed to use for approval of the Landscape Architect and shall ensure that all turves are similar to the approved sample. The Contractor shall inform the Landscape Architect of the location of the supply, so that turf can be inspected prior to lifting.

Season

Turf shall be laid when weather and soil conditions are suitable and, where possible, preference should be given to autumn and early winter operations. No turf shall be laid in exceptionally dry or frosty weather or in other unsuitable weather conditions.

Delivery and stacking

For large areas, turf shall be delivered at appropriate intervals throughout the work so as to avoid stacking for long periods.

Laying

No turf shall be laid until the soil preparation has been satisfactorily completed by being brought to an even tith and firmness. Turves from the stack shall be wheeled to turf layers on planks laid closely side by side. Adequate timber plants shall be used to support operatives and barrows, and provide access. The turves shall be laid in consecutive rows with broken joints (stretchier bonds), closely butted and to the correct levels. The turf shall be laid off planks working over turves previously laid. Where necessary, the turves shall be lightly and evenly firmed with wooden beaters, the bottom of the beaters being frequently scraped clean of accumulated soil or mud. A dressing of finely sifted topsoil shall be applied and well brushed into the joints. Any inequalities in finished levels owing to variation in turf thickness or uneven consolidation of soil shall be adjusted by raking and/or packing the soil under the turf. A roller shall not be used. The finished levels of the turf shall conform to the levels indicated, allowing for final settlement. Turf edges and margins shall be laid with whole turves. Turves adjoining buildings, walls or fences shall be taken to the face of the structure, giving complete soil cover.

Laying around trees

Turf shall not be laid to within 300mm of any tree trunk.

Watering

The Contractor shall be responsible for the replacement of any scorched turf. All necessary watering shall be carried out with sprinklers or oscillating sprays so as not to wash soil out of joints. If shrinkage occurs and the joints open, fine topsoil shall be brushed in and well watered.

PROTECTION TO EXISTING TREES

The recommendations in BS 5837: 2012, Trees in Relation to Design, Demolition & Construction must be complied with at all times.

MAINTENANCE

All maintenance to be carried out to the adopting authority/ householders from the date of planting and turfing to ensure successful establishment. All dead, diseased, damaged plants must be replaced during this time unless the local Planning Authority states, in writing, any variation to this.

Weeding

All beds to be kept weed free by hand weeding. Beds to be forked over as necessary to keep soil loose to approved carters with no follow.

Pruning

At appropriate time, prune plants to remove dead, dying or diseased wood and suckers to promote healthy growth and natural shape.

Watering

The Contractor shall ensure that sufficient water is applied to maintain healthy growth.

Litter

Site to be kept free of litter.

Grass cutting

The initial cut shall be carried out when first growth is apparent, blades set 20mm above ground. The Contractor shall continue cutting at appropriate intervals during the growing season and maintain 40mm high sward until grass areas are mowed over. Watering, weeding, cutting, repair of all erosion and settlement and re-seeding as necessary to establish a uniform and healthy stand of grass shall continue until handover to the householder.

GRASS SEEDING AND MAINTENANCE

Soil Preparation and Cultivation

Final grading of topsoil shall be agreed by the Landscape Architect before cultivation and seeding. All areas to be seeded shall be cultivated to 150mm depth and all weeds, stones, and refuse larger than 50mm shall be removed to tip. Cultivated soil shall be rolled and raked to produce a tith 25mm deep. Allow for hand cultivation where machine work is not possible. Seed sowing must immediately follow the preparation of the seed bed.

Seeding

Sowing shall be carried out during calm weather. All sowing is at the contractor's own risk and any areas where germination fails shall be re-seeded at the contractor's own expense. The operation should be carried out in equal sowings and transverse directions and the seed shall be raked or harrowed in. Sowing shall be at the rate of 50 grammes per sq.m. and overseeding shall be at a rate of 20 grammes per sq.m.

Seed Mix

The seed mix shall be A22 mix, obtainable from Germinall Seeds GB. Grass seed shall be of the composition, purity and germination as specified in BS 4428: 1989. Certificates of purchase shall be provided for all deliveries prior to the sowing of grass seed stating source, mixture, purity and germination percentage. Alternative cultivars of the above species may only be used if approved by the landscape architect.

Protection of Newly Seeded Areas

All reasonable precautions shall be taken to ensure that pedestrian and other traffic does not cross the grass areas during cultivation, seeding or until grass is established. Where obvious 'Short cutting' is occurring, the contractor shall erect an approved temporary fence so as to minimise the maintenance period or until such time as it is no longer necessary, or as directed.

First Cut

When the grass is 100mm high, it shall be cut down to 50mm so as to avoid root pulling. If the grass has been allowed to grow any longer than 100mm then the cuttings shall be raked off and taken off site.

Second Cut

When the grass is 65mm high a second cut shall be carried out using a rotar mower. No more than one third of the foliage must be removed.

Subsequent Cuts


Thereafter, when the grass grows to 100mm high, it shall be cut down to 50mm with a flail type mower, until the end of the maintenance period, or longer if so directed. The grass shall be cut on a regular basis if so directed.

Making Good

Any defects such as shrinkage, ponding, sparse germination or disease shall be made good and re-seeded as above.

Damage to Existing Grass

The contractor will be responsible for cultivating, seeding and maintaining, as above all areas of existing turf that are damaged during the course of the works for reasons of storage, working areas, transport of materials excepting those areas which are specifically defined and measured in the contract. Any areas, which in the opinion of the Landscape Architect, are consolidated during the course of these works, shall be loosened with a ripper or other suitable implement to ensure adequate drainage through the sub soil.

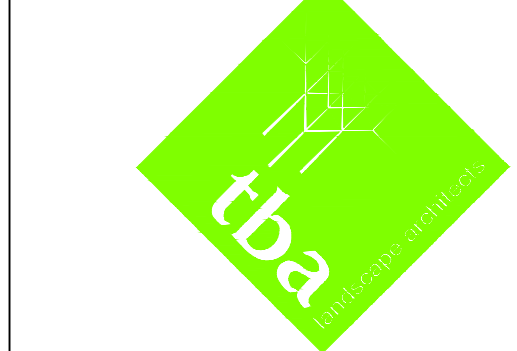

Landscape Architecture
Arboniculture

Trevor Bridge Associates Ltd
Ashton Old Baths
Stamford Street West
Ashton-under-Lyne
Lancs OL6 7FW

Tel: 0161-804 2099
E-mail: info@trevorbridge.co.uk

Project
HARE HILL ROAD, LITTLEBOROUGH

MR T FAIRLEY

Title
LANDSCAPE STRATEGY

Date	Scale(s)	Dwg no	Rev
Jan 25	1:200	tba 01	
Dwn	@ A1		
JW			