
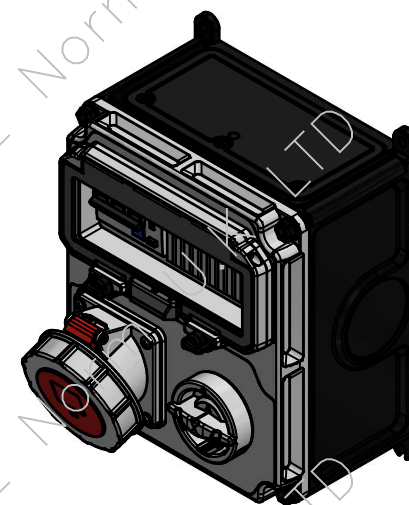
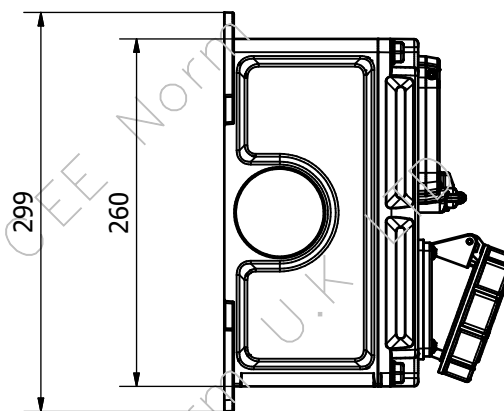
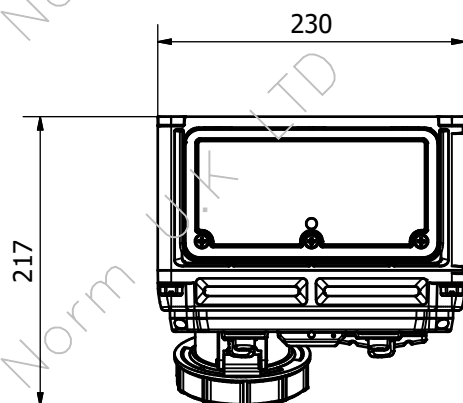
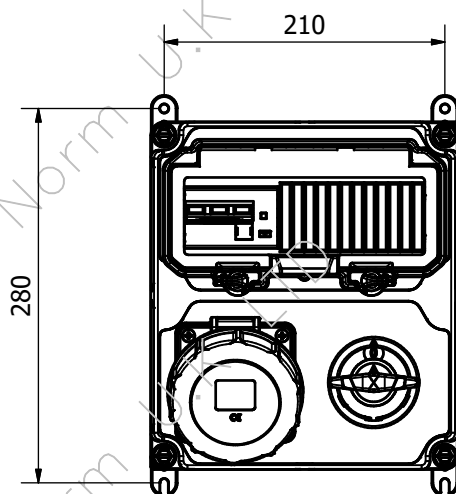




Gland Plate may be Fitted Top or Bottom.
Fitted Bottom as Standard.
Incorporating 1x M12, 1x M20, 2x M25
Threaded Cable Entries.
2x M25 can be replaced by 2x M32, or 2x M40.
A Blank Plate with or without Earth Continuity Plate
Is also Available by Request.

Title				Customer			
Variabox M - PBT Polyester Enclosure				Project Ref.			
32A 400V 3P+N+E (5 Pin) IP67 Switch Interlocked Socket				Order No.			
Protected by a 32A (C) 30mA (AC) 4 Pole RCBO				Drawn			
				Unit 2, Highbridge Court Stafford Park 1, Telford Shropshire, TF3 3BD. Tel: 01952 212700 Fax: 01952 212711		ADW	Date 20/08/2019
				CEE NORM		Checked	Date
				Not to be Copied or Distributed Without Written Consent.		Material PBT	Tolerance ISO 2768-m
				Drawing No. File - 990146 RCBO		Protection IP 67	Format A3
REV.	Description	Date	Name	Sheet 1 of 1			
				Scale 1 : 4			
				Format A3			