Please see drawing 3433 201

Please see drawing 3433 202

LOCATION PLAN

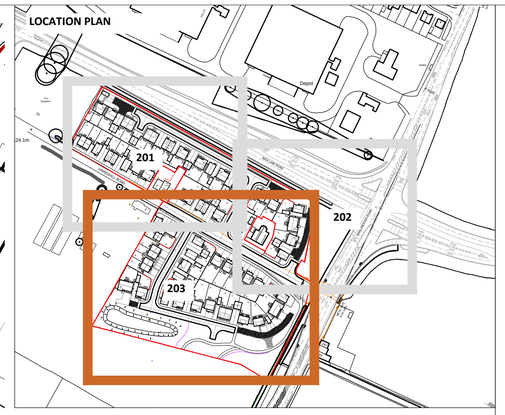

LEGEND

SOFT LANDSCAPE

Existing Off Site Trees to be Retained

Existing Hedgerow to be Retained

Proposed Semi Mature Trees
Trees to be planted as 20-25cm girth, Semi-Mature, 6-8m high with 2.5m clear stem. Trees to be secured with underground guying system.

Proposed Native Trees
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 3.5-4m high. Trees to be staked and secured with suitable rubber ties.
Species to be native including Oak, Beech, Birch, Alder and Rowan

Proposed Medium Size Ornamental Trees
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 4-5m high. Trees to be staked and secured with suitable rubber ties.

Proposed Small Ornamental Trees
Trees to be planted as 10-12cm girth or 50L containers, 2-3m high and secured with single stake and suitable rubber ties.

Proposed Native Hedgerow
To be planted at 80-100cm, bare root stock, as a double staggered row at 300mm centres. Species to be a native mix and secured with spiral guards/ tubes.

Proposed Hedgerows
To be evergreen hedgerows, 80-100cm high, in 7.5-10L containers at a rate of 3 per linear metre.

Proposed Shrub Planting
Ornamental shrub planting, to be planted in 3-4L containers at 3-4 p/m², and enhanced by feature specimens in 10-15L pots.

Proposed Wildflower Meadow
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.

Proposed Wildflower Meadow for Wetland
To be Emorsgate EM8 Meadow Mixture for Wetland, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.

Proposed Woodland Planting Mix
Broadleaved woodland planting mix including Oak, Sycamore, Birch, Rowan and Hawthorn.
To be planted as whips with selected standards at 1p/m²
To be planted in groups of 3 or 5.

Proposed Defensible Planting Mix
To be planted with thorny and evergreen species including Blackthorn, Bramble and Teasel.
To be planted as bareroot stock, 40-60cm, at 2p/m². To be planted in groups of 3 or 5.

Marginal Planting
To be planted in 3L containers at 6p/m²
To be planted in groups of 3 or 5.

Proposed Amenity Grass

For planting notes and planting schedule please see drawing 3433 202

REVISION NOTES

Rev	By	Description	Date
P	JW	Updated in line with site layout (P34)	17.06.24
O	AJ	Updated in line with site layout (P33)	21.05.24
N	DC	Updated in line with site layout (P31)	25.10.23
M	AJ	Updated in line with site layout (P30)	05.10.23
L	AJ	Footpath amended	07.09.23
K	DC	Updated in line with site layout (P27)	06.09.23
J	FZ	Updated in line with landscape layout	19.07.23
I	DC	Updated in line with site layout (P22)	02.05.23
H	JL	Updated in line with landscape layout	15.03.23
G	TJ	Updated in line with landscape layout	25.03.22
F	JS	Updated in line with landscape layout	22.11.21
E	TJ	Updated in line with landscape layout	27.09.21
D	TJ	Updated in line with landscape layout	09.04.21
C	MW	Updated in line with landscape layout	13.01.21
B	GBS	Updated in line with landscape layout	10.12.20

GENERAL NOTES

1. This drawing is the copyright of tpm landscape Ltd and cannot be reproduced in any form without the consent of the company.
2. This drawing is to be read in conjunction with detail landscape drawings, details and specification.
3. This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
4. The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
5. The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
6. All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
7. All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
8. All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

Client
Russell Homes

Project
South Heywood Residential - Phase 6

Description
Planting Plan (Sheet 3 of 3)

Status
For Approval

Scale @ A1	Drawn	Checked	Date
1:250	GBS	MW	12.11.20
Job number	**Drawing number**		**Revision**
3433	203		P

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk