


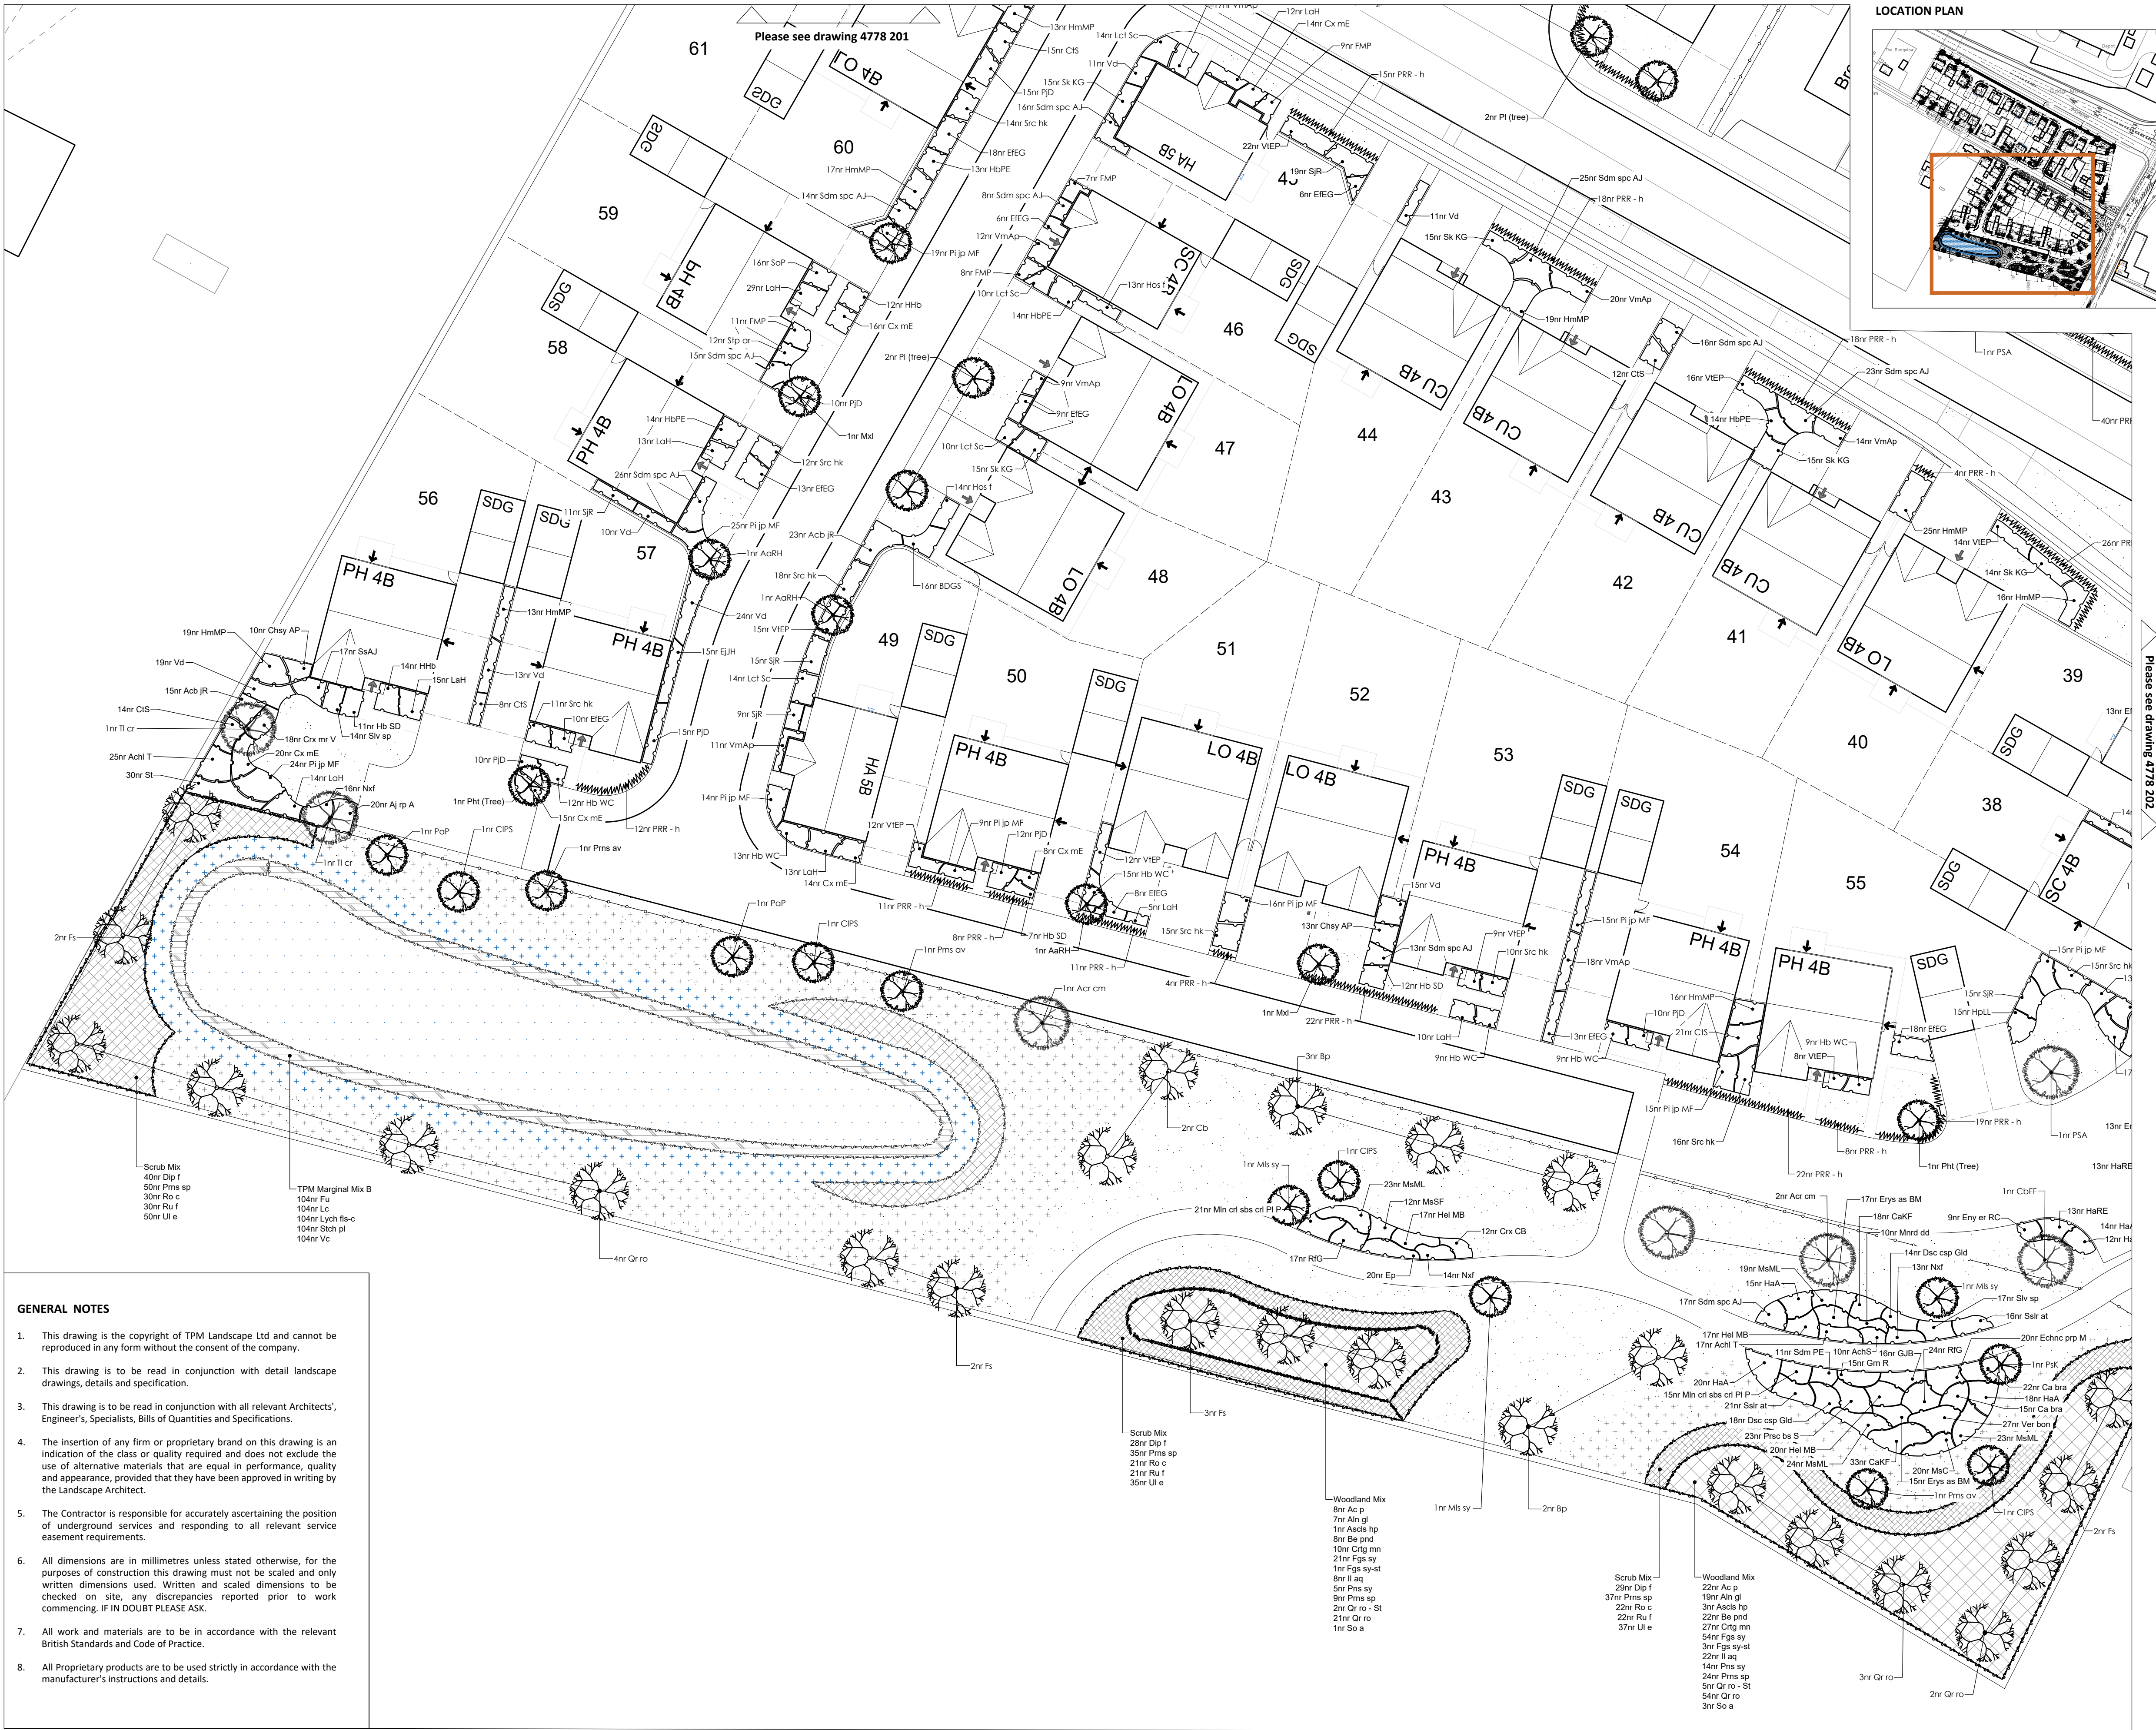

- LEGEND**
- SOFT LANDSCAPE**
- Proposed Semi Mature Trees**
Trees to be planted as 20-25cm girth, Semi-Mature, 6-8m high with 2.5m clear stem. Trees to be secured with underground guying system.
 - Proposed Native Trees**
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 3.5-4m high. Trees to be staked and secured with suitable rubber ties. Species to be native including Oak, Beech, Birch, Alder and Rowan
 - Proposed Medium Size Ornamental Trees**
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 4-5m high. Trees to be staked and secured with suitable rubber ties.
 - Proposed Small Ornamental Trees**
Trees to be planted as 10-12cm girth or 50L containers, 2-3m high and secured with single stake and suitable rubber ties.
 - Proposed Native Hedgerow**
To be planted at 80-100cm, bare root stock, as a double staggered row at 300mm centres. Species to be a native mix and secured with spiral guards/ tubes.
 - Proposed Hedgerows**
To be evergreen hedgerows, 80-100cm high, in 7.5-10L containers at a rate of 3 per linear metre.
 - Proposed Shrub Planting**
Ornamental shrub planting, to be planted in 3-4L containers at 3-4 p/m², and enhanced by feature specimens in 10-15L pots.
 - Proposed Wildflower Meadow**
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.
 - Proposed Wildflower Meadow for Wetland**
To be Emorsgate EM8 Meadow Mixture for Wetland, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.
 - Proposed Woodland Planting Mix**
Broadleaved woodland planting mix including Oak, Sycamore, Birch, Rowan and Hawthorn. To be planted as whips with selected standards at 1p/m². To be planted in groups of 3 or 5.
 - Proposed Defensible Planting Mix**
To be planted with thorny and evergreen species including Blackthorn, Bramble and Teasel. To be planted as bare root stock, 40-60cm, at 2p/m². To be planted in groups of 3 or 5.
 - Marginal Planting**
To be planted in 3L containers at 6p/m². To be planted in groups of 3 or 5.
 - Proposed Amenity Grass**

REVISION NOTES

Rev	By	Description	Date
A	RN	Removed all trees from Back garden	06.02.25

- GENERAL NOTES**
- This drawing is the copyright of TPM Landscape Ltd and cannot be reproduced in any form without the consent of the company.
 - This drawing is to be read in conjunction with detail landscape drawings, details and specification.
 - This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
 - The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
 - The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
 - All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
 - All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
 - All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

Client
Bellway Homes Limited

Project
Heywood Phase 6

Description
Planting Plan (3 of 3)

Status
For Approval

Scale @ A1 1:250	Drawn RN	Checked CT	Date 05.12.24
Job number 4778	Drawing number 203	Revision A	