


GENERAL NOTES

- This drawing is the copyright of tpm landscape Ltd and cannot be reproduced in any form without the consent of the company.
- This drawing is to be read in conjunction with detail landscape drawings, details and specification.
- This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
- The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
- The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
- All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
- All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
- All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

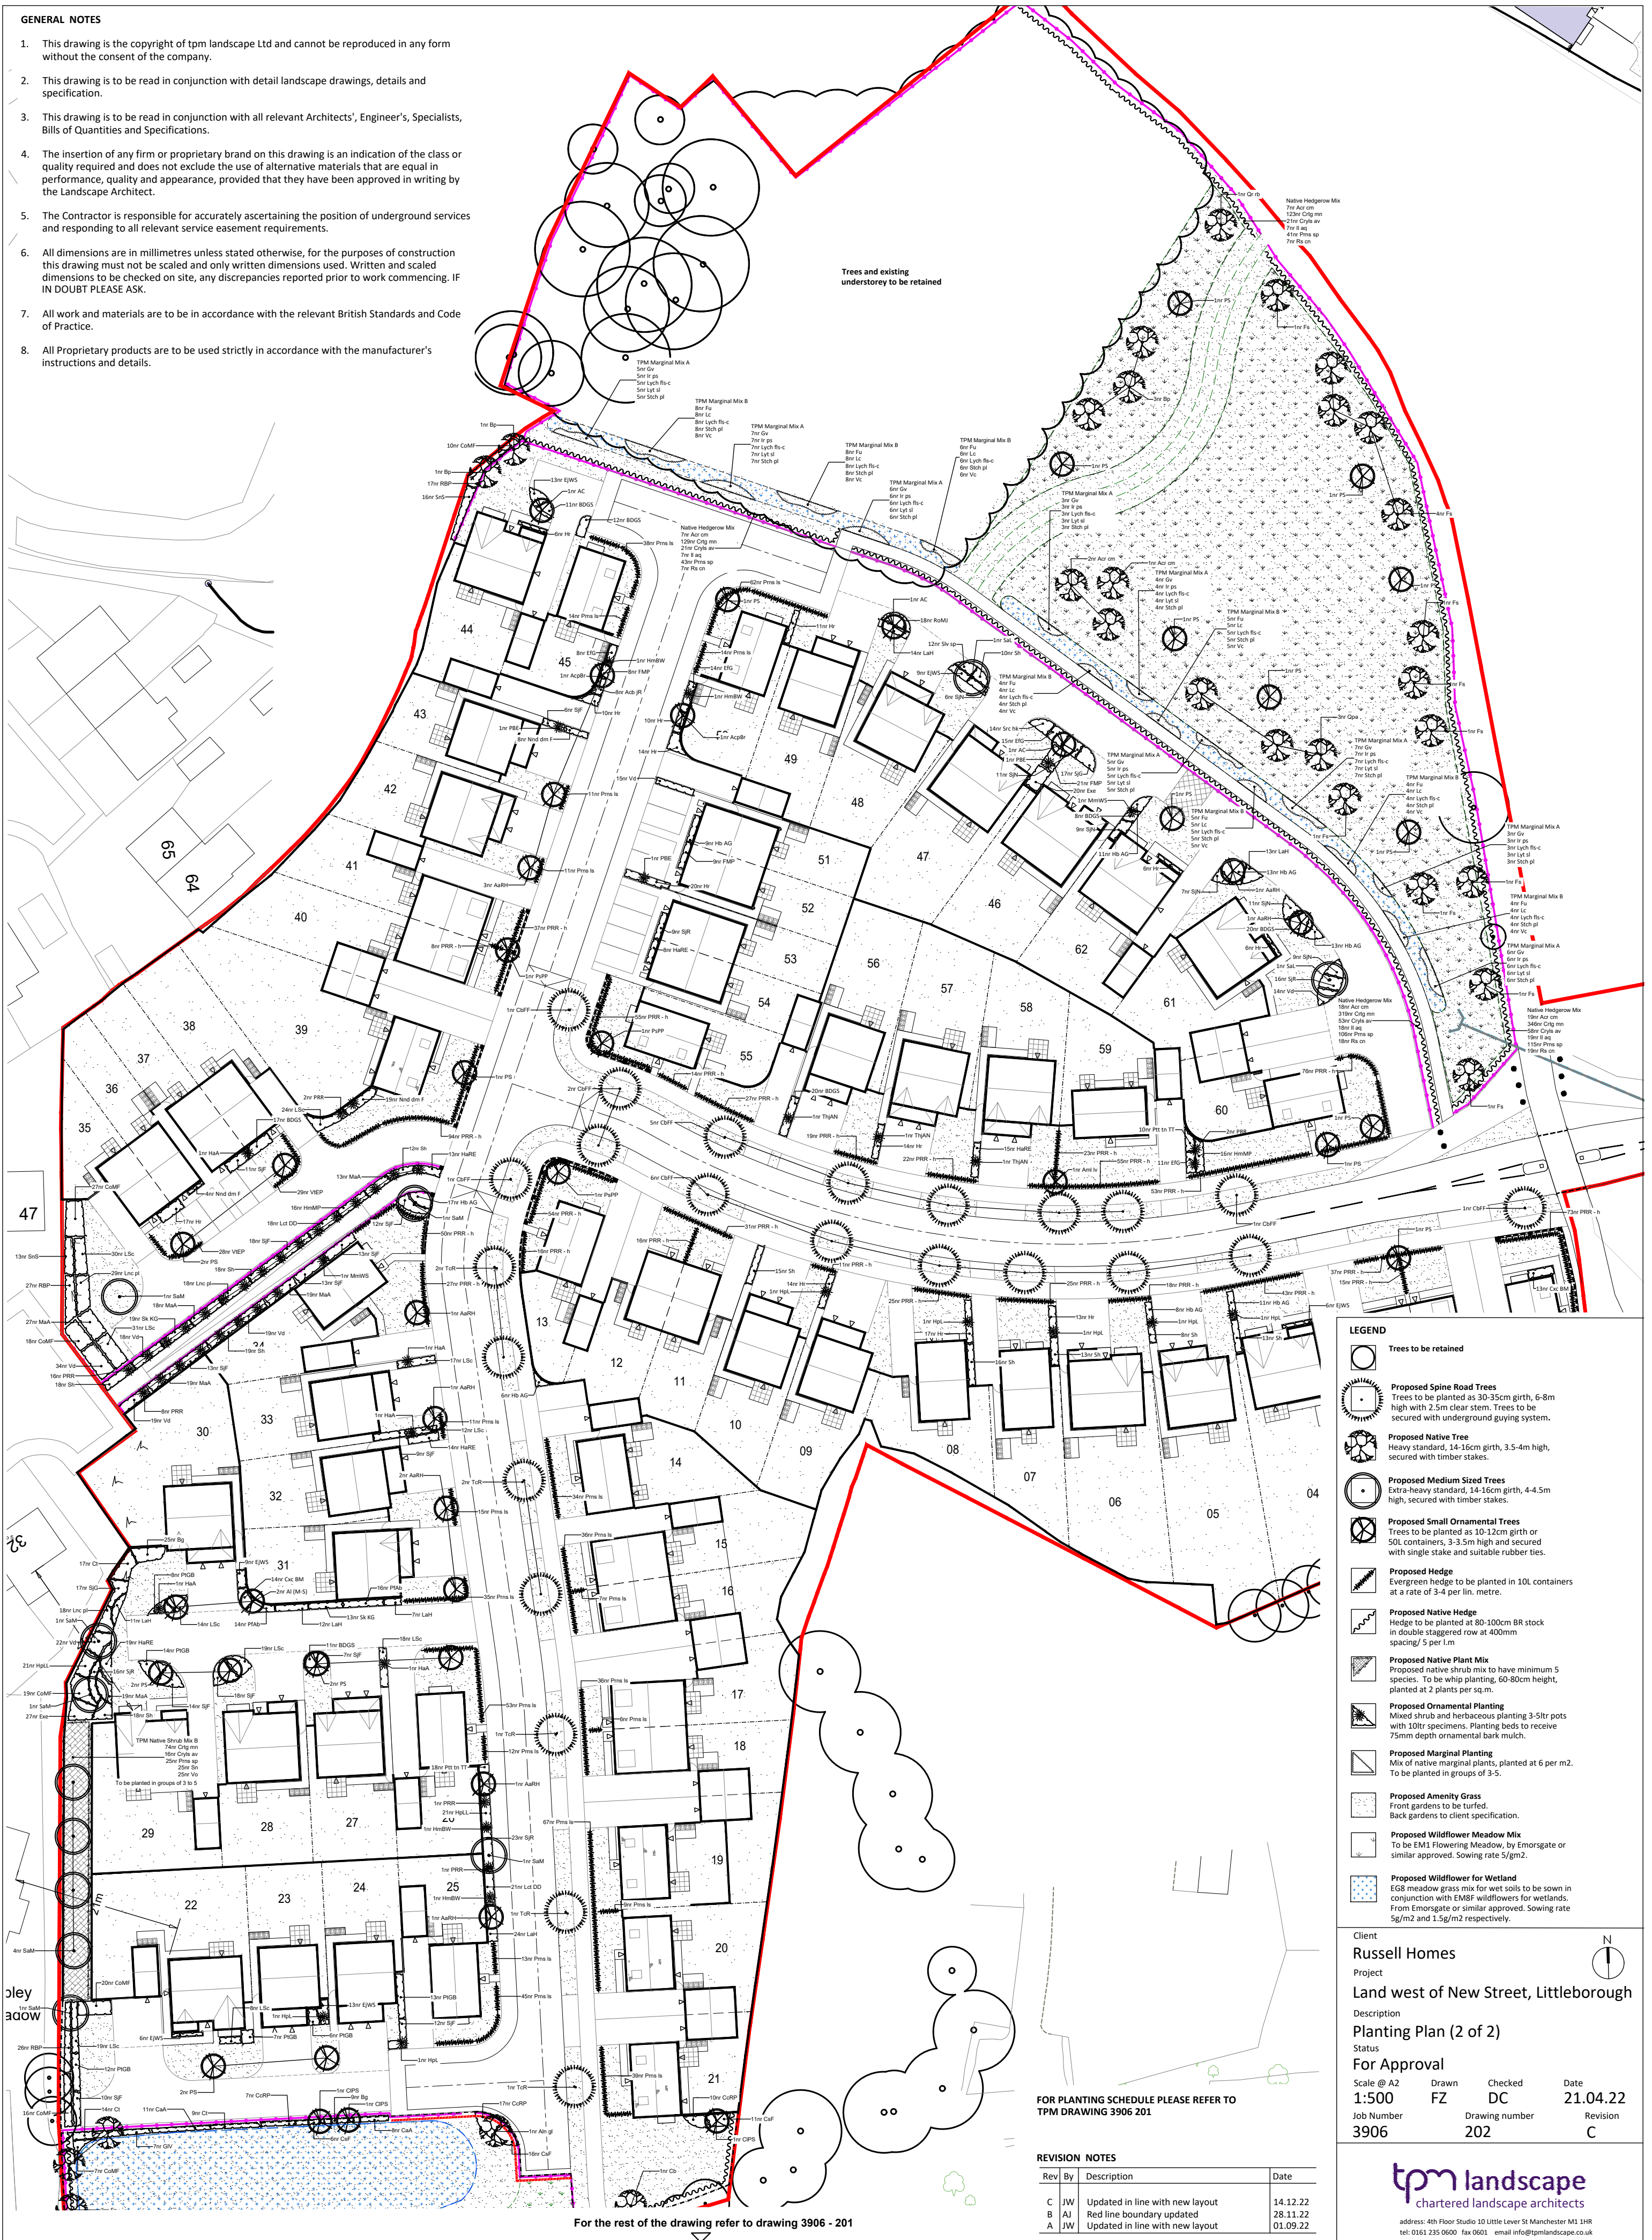

Trees and existing understorey to be retained

- LEGEND**
- Trees to be retained
 - Proposed Spine Road Trees
Trees to be planted as 30-35cm girth, 6-8m high with 2.5m clear stem. Trees to be secured with underground guying system.
 - Proposed Native Tree
Heavy standard, 14-16cm girth, 3-4m high, secured with timber stakes.
 - Proposed Medium Sized Trees
Extra-heavy standard, 14-16cm girth, 4-4.5m high, secured with timber stakes.
 - Proposed Small Ornamental Trees
Trees to be planted as 10-12cm girth or 50L containers, 3-3.5m high and secured with single stake and suitable rubber ties.
 - Proposed Hedge
Evergreen hedge to be planted in 10L containers at a rate of 3-4 per lin. metre.
 - Proposed Native Hedge
Hedge to be planted at 80-100cm BR stock in double staggered row at 400mm spacing/ 5 per 1m.
 - Proposed Native Plant Mix
Proposed native shrub mix to have minimum 5 species. To be whip planting, 60-80cm height, planted at 2 plants per sq.m.
 - Proposed Ornamental Planting
Mixed shrub and herbaceous planting 3-5ltr pots with 10ltr specimens. Planting beds to receive 75mm depth ornamental bark mulch.
 - Proposed Marginal Planting
Mix of native marginal plants, planted at 6 per m2. To be planted in groups of 3-5.
 - Proposed Amenity Grass
From gardens to client specification.
 - Proposed Wildflower Meadow Mix
To be EM11 Flowering Meadow, by Emorsgate or similar approved. Sowing rate 5/gm2.
 - Proposed Wildflower for Wetland
EG8 meadow grass mix for wet soils to be sown in conjunction with EM88 wildflowers for wetlands. From Emorsgate or similar approved. Sowing rate 5g/m2 and 1.5g/m2 respectively.

FOR PLANTING SCHEDULE PLEASE REFER TO TPM DRAWING 3906 201

REVISION NOTES					
Rev	By	Description	Date		
C	JW	Updated in line with new layout	14.12.22		
B	AJ	Red line boundary updated	28.11.22		
A	JW	Updated in line with new layout	01.09.22		

Client
Russell Homes
Project
Land west of New Street, Littleborough
Description
Planting Plan (2 of 2)
Status
For Approval
Scale @ A2
1:500
Job Number
3906
Drawn
FZ
Checked
DC
Drawing number
202
Date
21.04.22
Revision
C

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 3HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk

For the rest of the drawing refer to drawing 3906 - 201