

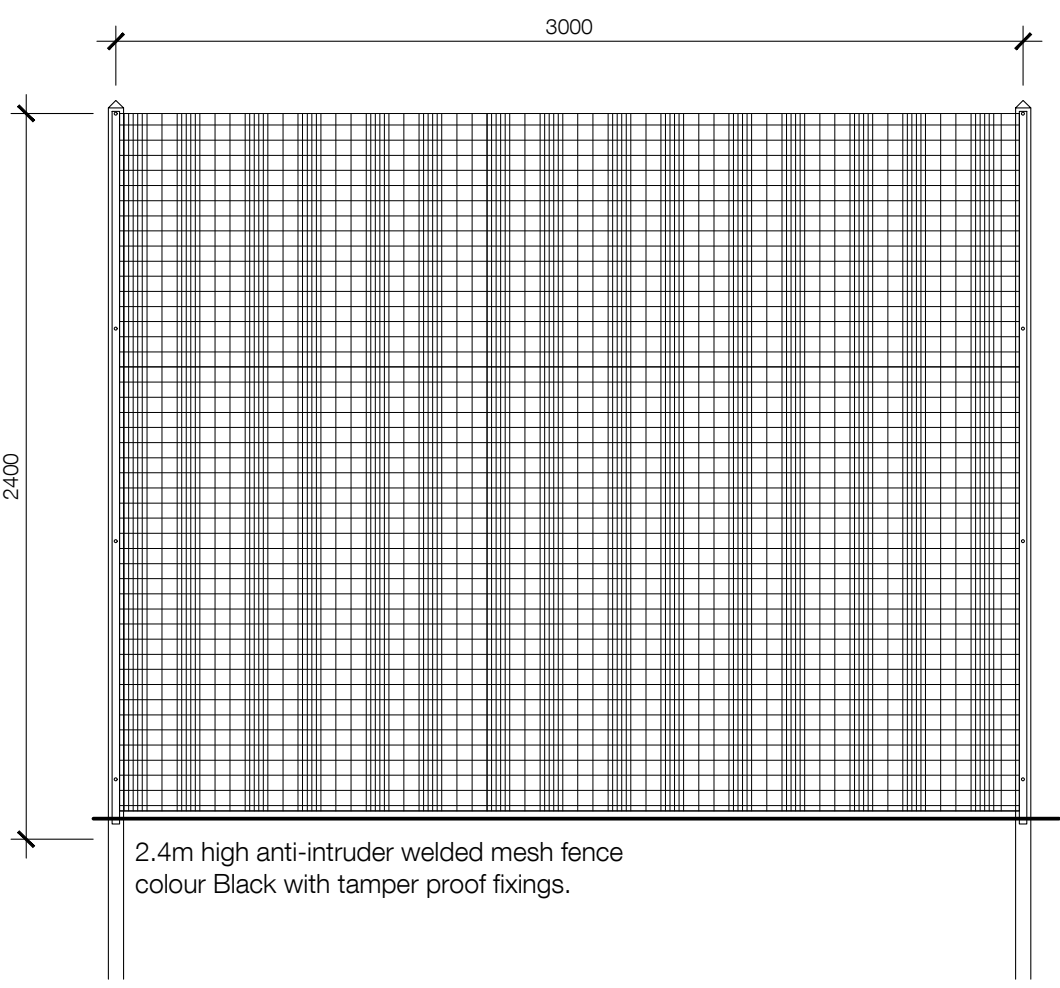


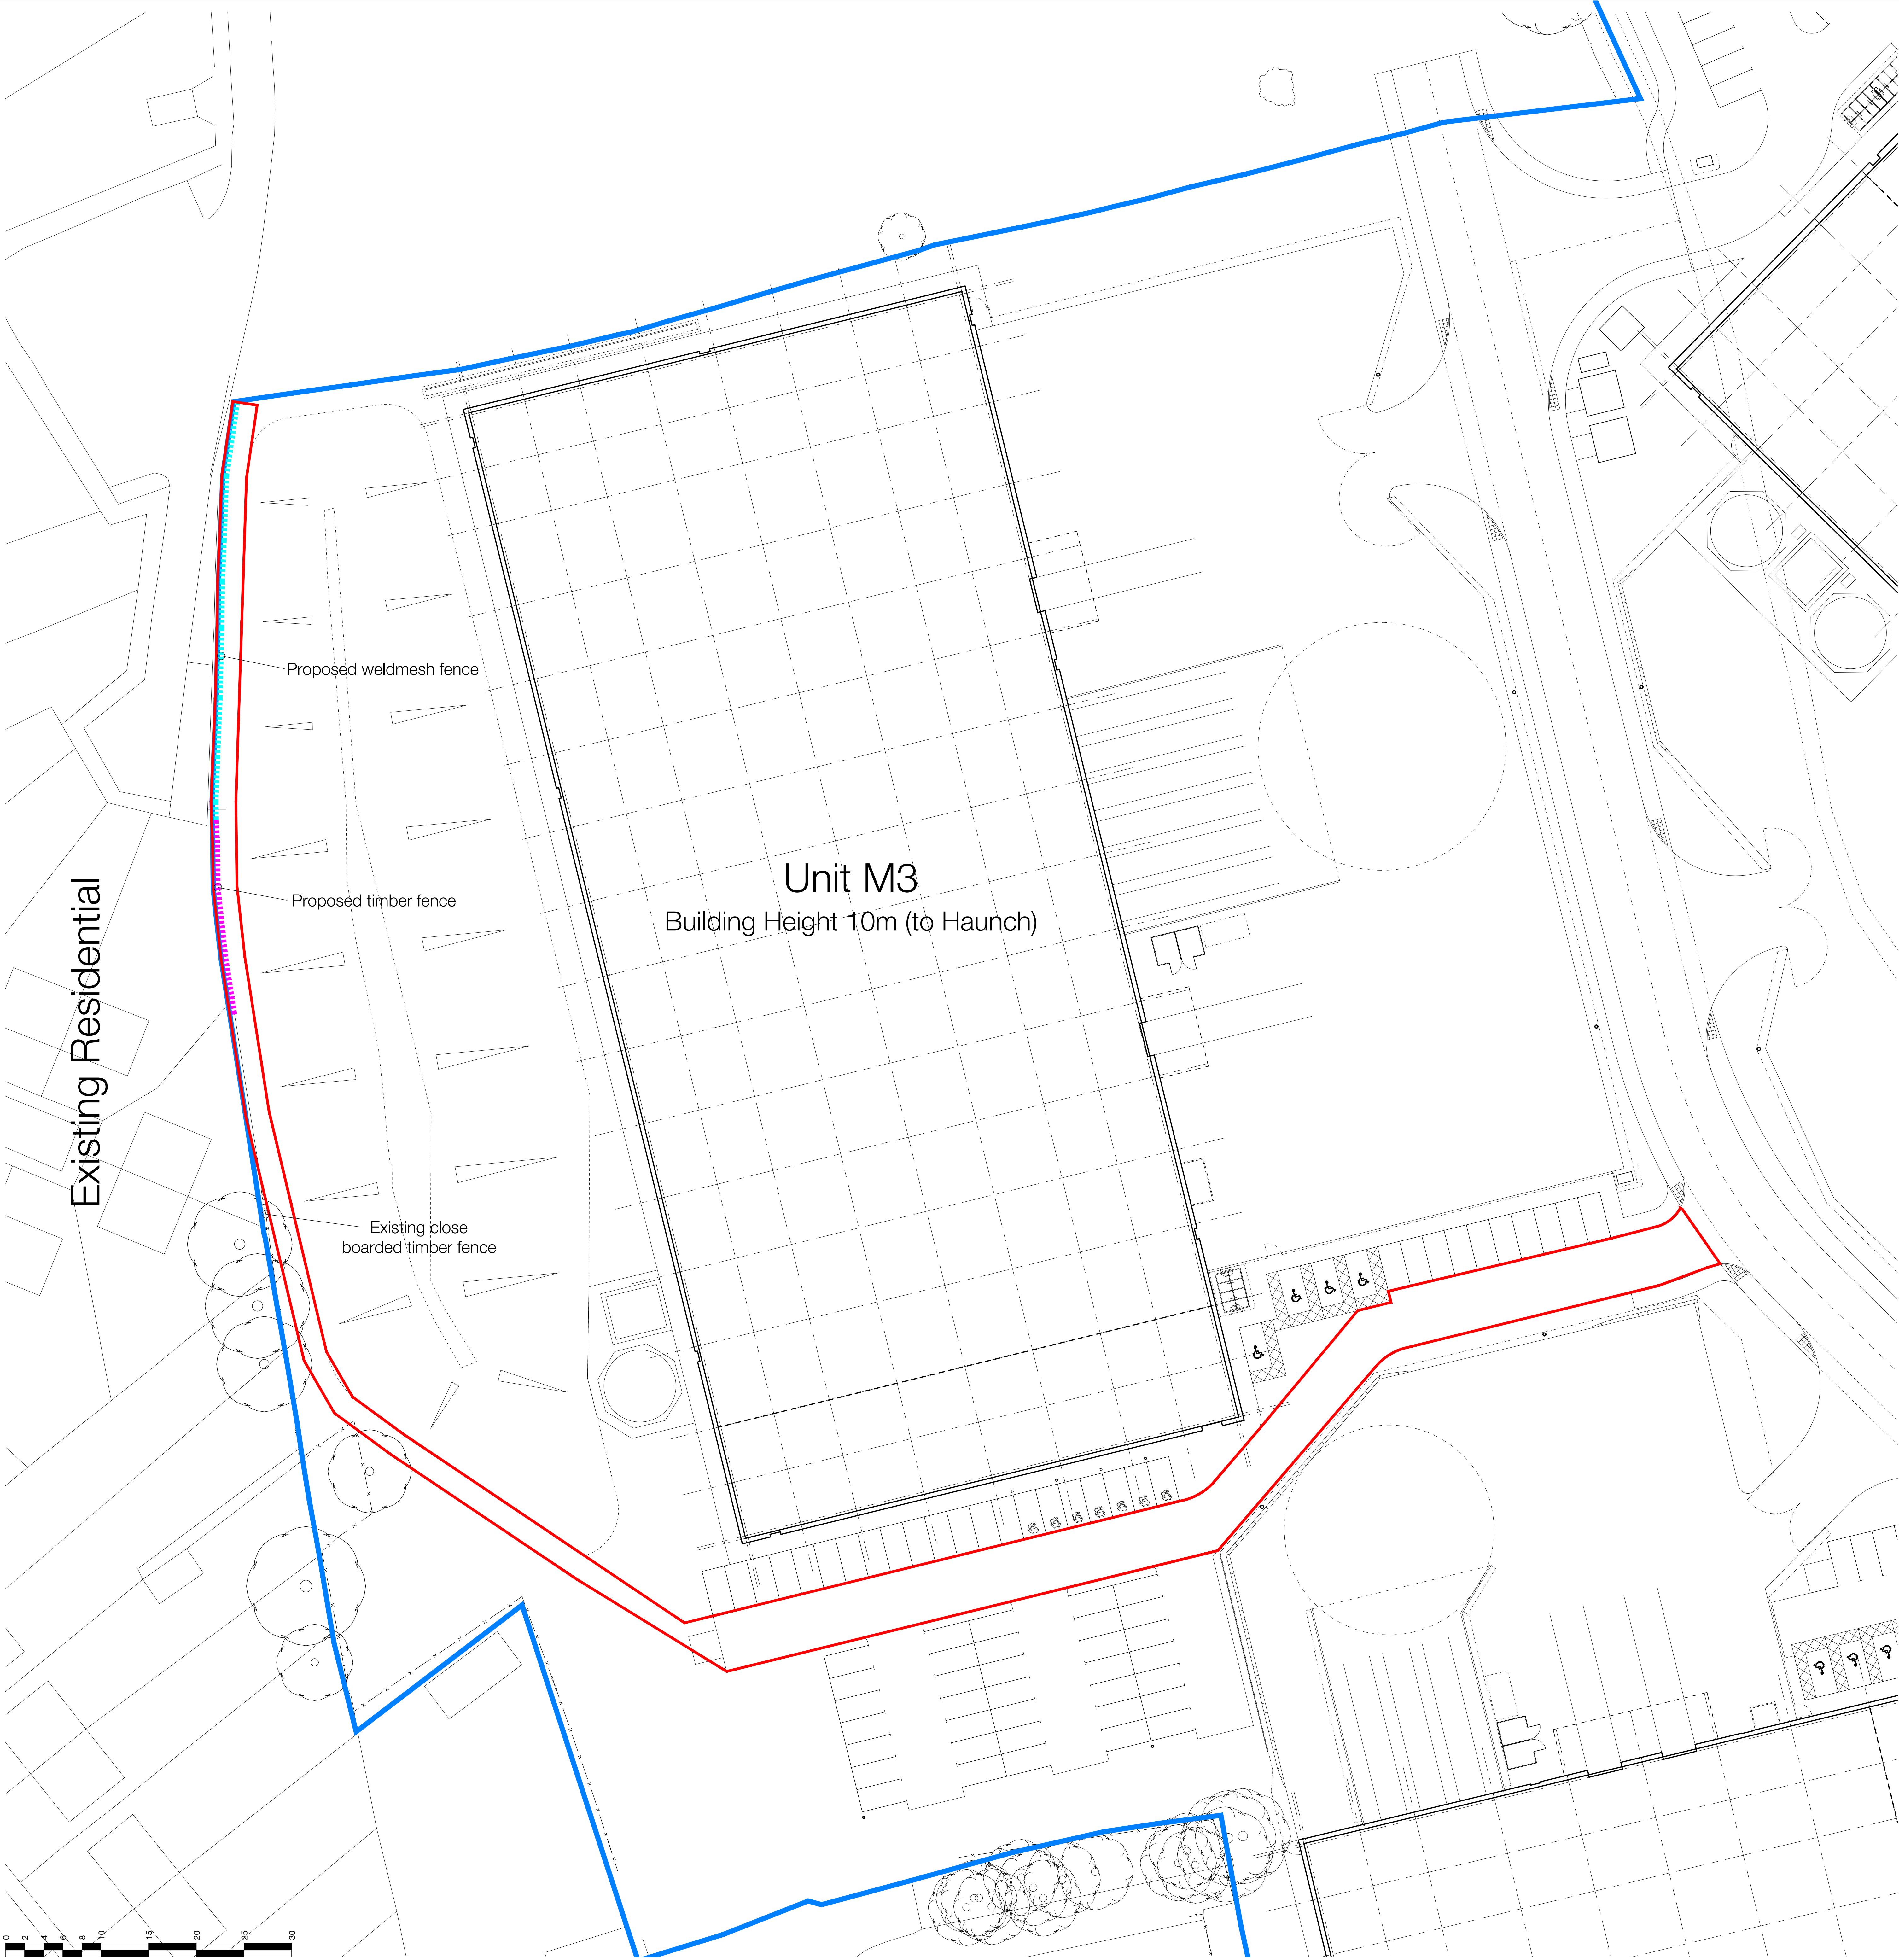

Proposed Weldmesh fence to western boundary 1:25

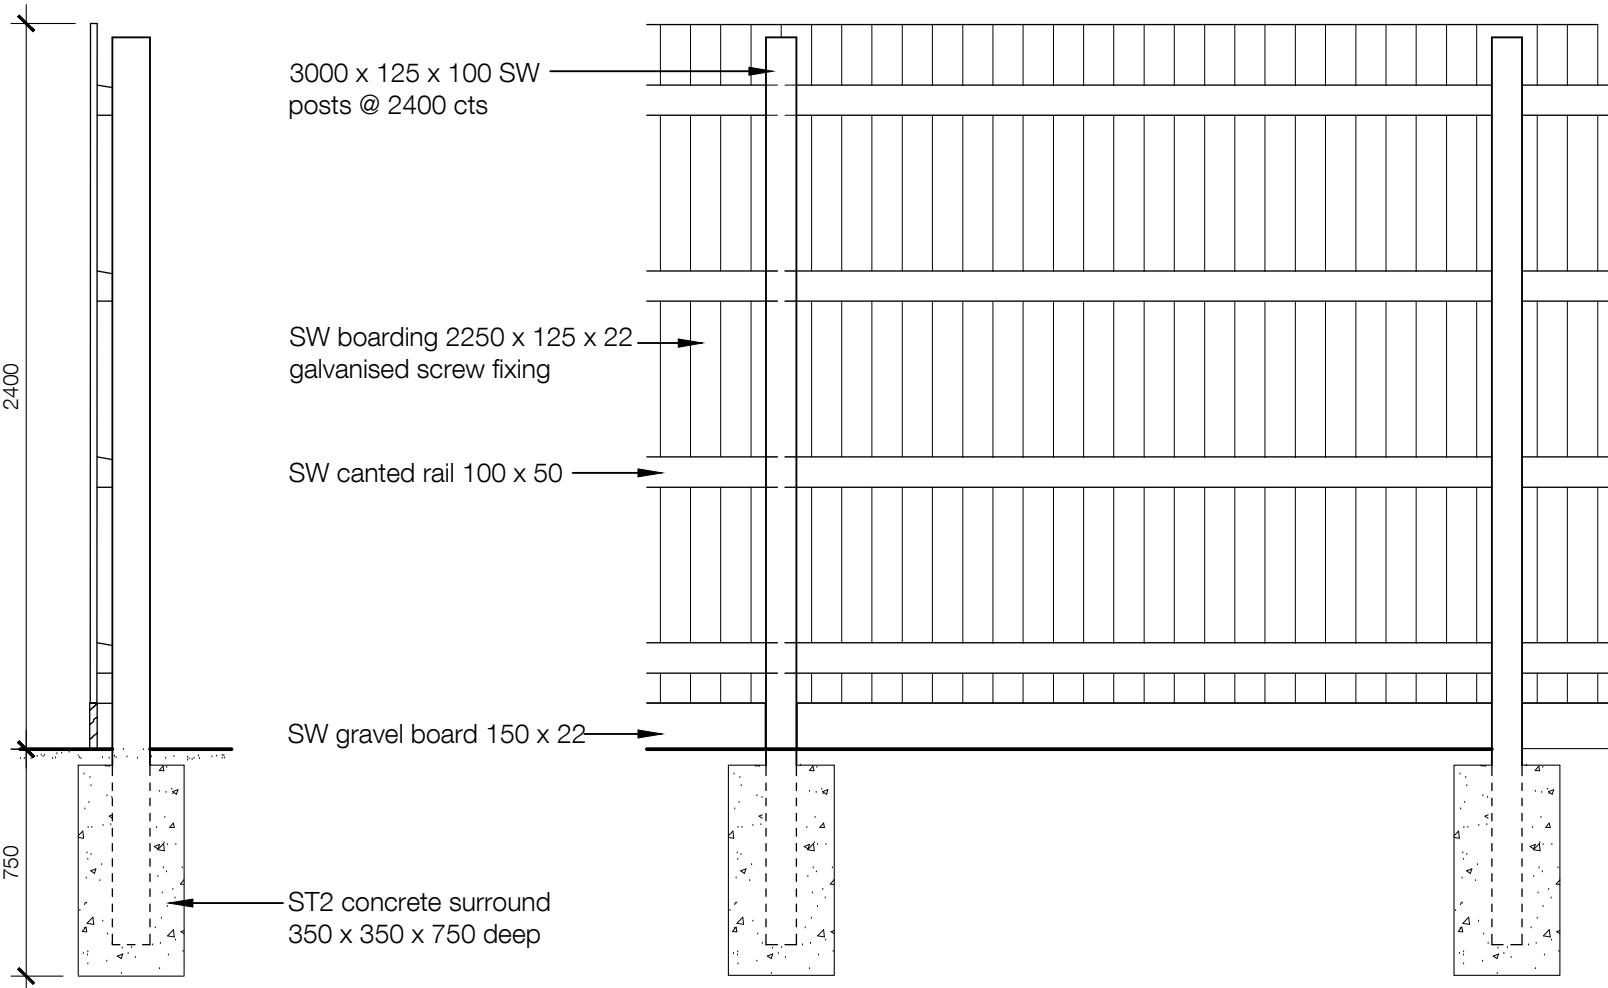


Section
Proposed Timber fence to western boundary 1:25

Fence - General notes
Close boarded timber fence to be constructed to BS 1722 posts should be spaced at 2400mm max, centres
Depth of insertion
Posts to be inserted to a minimum of 650mm for a 2400mm high fence with a concrete surround as indicated.
Fixings
All fixings should be galvanised and are generally to be screw fixings, where bolts are used the nuts should be countersunk or the projecting threads should be burred.
All softwood components are to be vacuum/pressure treated

- Fencing key
- Estate Boundary
 - Planning Boundary
 - Existing 2.4m high anti-intruder weld mesh type fencing over soft / gravel / asphalt surfaced area - root fixed
 - Existing close boarded timber fence
 - Proposed close boarded timber fence
 - Proposed 2.4m high 'hit and miss' timber fence



Note: This is a colour drawing, in order to ensure any subsequent reproduction is viewed correctly it is to be re-printed in full colour

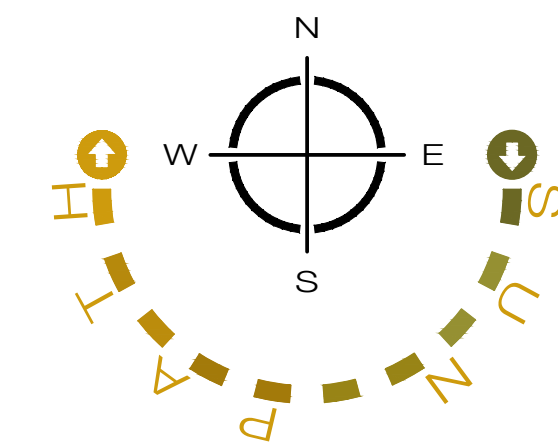

dlA
ARCHITECTURE
55 St Pauls Street | Leeds | LS1 2TE
0113 887 3100
www.dla-architecture.co.uk

PROJECT
**KINGSWAY BUSINESS PARK
PLOT M**

TITLE
**PROPOSED SITE PLAN AND
FENCING**

SCALE
VARIES @A0 DATE
18/07/23

DLA REF
2021-135 DRAWN
CF REVIEWED
PT

PROJECT
G1135 DLA MS XX DR A REVISION
90082

STATUS
PLANNING REVISION
P 01
T:\2021\2021-135\CAD\05-Autocad\Drawings\90082.dwg