



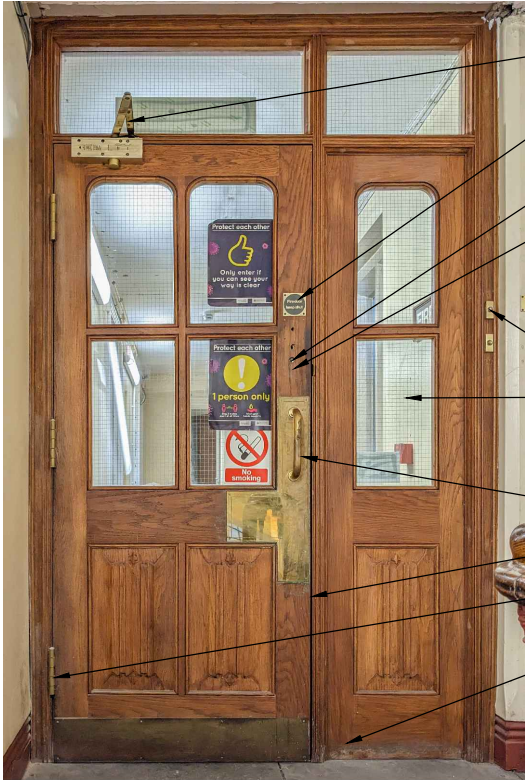

Note: Door to be upgraded and to achieve 30 minutes fire separation

- Remove door closer, and make good door frame and leaf ready to receive new concealed closer.
- Remove all signage and prepare the door to receive new.
- Fill holes as per note 8.2
- Install new mechanical code lock for door operation in existing location and make door and frame good.
- Remove redundant door bells and fill any holes
- Unscrew beading and replace existing Georgian wired with new Promat Pyrosec 7 and trims as detail.
- Overhaul existing ironmongery as per item 6.1
- Fit new intumescent seals
- 3no. existing hinges to be replace with new modern fire rated hinges to EN1935.
- Allow for cleaning of timber door and frame to remove all dirt and grime and retreating with Osmo Oil.

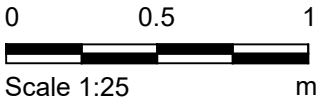

View from Stair S10



- Remove architrave and verify fire stopping and update to BS8214:2016 -
- Clean the joint between the architrave and the supporting wall by raking out the old mortar, if this reveals significant depth, the area if over 5mm wide should be packed with mineral wool to the depth of the hole and left 5mm shy of the architrave edge.
- This 5mm deep by 5mm wide rebate should be filled with intumescent mastic. If the raked out joint is under 5mm wide the joint should be capped off with a bead of intumescent at least 4 times the width of the joint in depth.
- Remove redundant lock and handle and fill holes as per note 8.2
- Remove all redundant surface fittings
- Allow for cleaning of timber door and frame to remove all dirt and grime and retreating with Osmo Oil.
- Fit new Slim-line mortised automatic drop seal by Lorient ref LAS8001 SI. Tolerance from base of door leaf to cill 3 -13mm.

View from Lobby S11c

Repair Notes & Specification

- Indent repair to missing / damaged section of door**
Remove minimum amount of existing timber to form an effective repair. Ensure an effective bond between the new and existing sections of timber. Work new material to line of existing and avoid unnecessary trimming of the original timber. Repairs to follow any existing deformations in the line of the doors. Pieced-in repairs to be formed from wood to match existing. The quality and grain must match the original. The moisture content must match the original. Screw / pin fix and glue to secure splice repairs. Screw / pin fixings to be countersunk and filled flush to match colour of timber indent. Where door is to be dismantled as part of the repair process, mark and record the constituent parts before dismantling. Store in a safe place and on dry bases. Protect from abrasion, damage and saturation.
- Loose / delaminated veneer**
Carefully pull back section of loose / delaminated veneer and work glue across rear with a hacksaw or piece of card. Clamp veneer in place making sure not to damage or indent outer face.
- Mouldings / carvings**
Select samples of original mouldings / carvings to replicate with CA. Carefully strip-off existing finish to reveal crisp clean edges. Take template of moulded / carved section and use to form new section of timber. NB: Make moulded section slightly over-sized to allow for working back to precise line of existing timber.
- Cracked panels**
Remove cracked panels by disassembling door and repair by gluing and cramping or replace to match existing. Reassemble on completion of repairs.
- Open joints between frame members**
5.1 Take door into workshop and check if joint is sound. If joint is sound carefully remove any loose wedges and apply glue to shoulders of the tenon. Work glue down to base of tenon with a hacksaw blade or piece of card. Apply glue to the voids left by removal of wedges from mortice. Pull joints together, clamp in place and re-wedge.
5.2 If joint is not sound carefully dismantle only those components of the door required to achieve a sound and stable repair. Before disassembly, mark and record the constituent parts. Store in a safe place and on dry bases. Protect from abrasion, damage and saturation. Renew damaged stiles / rails as required (to be agreed with CA once door has been disassembled). Renewed section to be in similar timber of existing. If existing timber is SW, new timber is to be pressure impregnated.
5.3 If required, strengthening of joints is to be carried-out using 20mm wide, 125mm x 125mm, 2mm thick stainless steel angles recessed into edge of head and stile of door at 4.no corners. Any areas of strengthening to be agreed onsite with CA once door has been disassembled.

6. Overhaul existing ironmongery:

- 6.1 Where no repairs have been identified, remove any dirt / detritus from the existing ironmongery using a dry lint free cloth and lubricate all moving components.
- 6.2 Where existing ironmongery has been identified as needing to be overhauled, mark and record the constituent part before removing and take into workshop. Carefully disassemble the component and clean its constituent parts with a lint free cloth. Identify any missing or damaged parts and report to the CA. Contractor to source replacement parts from basement stockpile with the CA. Once missing / damaged parts have been installed, reassemble, lubricate all moving parts and reinstall component in its original position.
- 6.3 Where existing ironmongery is damaged beyond repair / missing contractor to source replacement component from basement stockpile (if possible)

7. Re-set a sagging door leaf

- 7.1 Where existing door leaf is square / matches profile of door frame rebate, pack / realign hinges to ensure consistent gap between the door leaf and frame rebate. Ease and adjust as necessary.
- 7.2 Where existing door leaf no longer matches profile of door frame rebate, take into workshop. Carefully remove existing wedges and apply glue to shoulders of the tenon with a hacksaw blade or piece of card. Apply glue to voids left by removal of wedges from mortice. Pull door joints

8. Infilling holes:

- 8.1 Where existing holes are small, fill with a high performance wood filler colour matched to the existing timber. Ensure filler is applied slightly proud of the existing surface and sanded back to a smooth seamless finish.
- 8.2 Where existing holes are medium / large, install timber pellet. Pellet to be secured in place with glue and formed from wood to match existing. Gain of pellet to be aligned with grain of existing timber. Pellet to be installed slightly proud of the existing surface and sanded back to a smooth seamless finish.

9. Leaded lights

Record and photograph all leaded lights, to include basic measurements. Mark and record identity of all components being dismantled and which opening they are from. Photographs of each panel to be taken from the interior and exterior and notes of dimensions, construction details etc, are to be taken and copies supplied to the CA prior to the removal of windows. Remove leaded lights back to glass studio for rebuilding, ensuring minimum flexing of the panels during removal and transportation. Rubbing must be taken prior to the dismantling of glazed panel. Gently clean both sides of glass using de-ionised water and soft brushes/cloths. Any further cleaning required / employing of alternative techniques, is to be discussed with CA beforehand. Allow for full condition survey of cleaned down glazing to be undertaken by specialist contractor and CA. Replace broken / missing glass with new panes to match existing. New glass is to match old glass and be of similar thickness. See door schedule for approximate amount of renewal to be undertaken. Provide samples of all replacement glass to CA for approval prior to rebuilding of glass pane. Notify CA of any sections of damaged glass not indicated in the schedule and agree any additional replacement in advance of works. Carefully rebuild damaged areas of glass pane allowing for re-leading as appropriate. Sample of lead came to be provided prior to commencement of re-leading. Lead comes are to be selected to exactly match the dimensions of both the heart and flange of the existing comes. The profile should be matched to the original as closely as possible. e-assemble glass panes and allow for specialist conservator to re insert refurbished lights back into the window frames. The glass panes should, as closely as possible, match their appearance prior to the works. Great care is to be taken to ensure existing glass is not damaged as part of the works. Where existing glass pane is sound but loose, allow to re-pack the perimeter of the pane and refix perimeter glazing bead tight up against glass pane.

10. Existing Modern glass panes

Remove existing glazing beads, along with all traces of existing packing, putty and adhesives. Replace existing glass pane with new. Securely fix fire rated glass pane and fire rated glazing channel (if required) in accordance with manufacturer's recommendations. Refix the existing glazing beads in place.

NOTES

The existing building measured survey has been undertaken by Salford Archaeology and all reference to this information is referenced directly from the associated drawings.

General Notes

Any doors or ironmongery to be taken from site should be carefully recorded and catalogued by the contractor and the process for removal agreed with the client team.

All existing doors are to be protected with temporary coverings for the duration of the work to prevent damage from site traffic.

Ensure the door fits with sides and top gaps 2-4mm.

11. Existing Intumescent strips:


Carefully remove any existing intumescent / weather strips from the door leaf and frame along with all traces of adhesive. Where existing intumescent / weather strips have been rebated into the door frame, carry out an indent repair as per item 1.

12. Missing / modern screws:

Remove all philips/pozidriv head / modern screws as indicated in the door schedule and replace with brass slotted head screws. Reinstate any missing screws as indicated in the door schedule with brass slotted head screws. Replacement slotted head screws to be dome / countersunk head as indicated and sized to match existing adjacent screws.

13. Re-hang door leaf:

Carefully remove door hinges from frame and infill existing screw holes as per item 8. Where door is to swing in opposite direction, install existing hinges on the opposite side of the hinge stile using original screws and carry out indent repair as item 5 to missing sections of hinge stile. Where required install new timber rebate to match material and finish of existing door leaf and architraves. Install door leaf in new position as indicated on GA's using original screws. Ease and adjust as necessary.

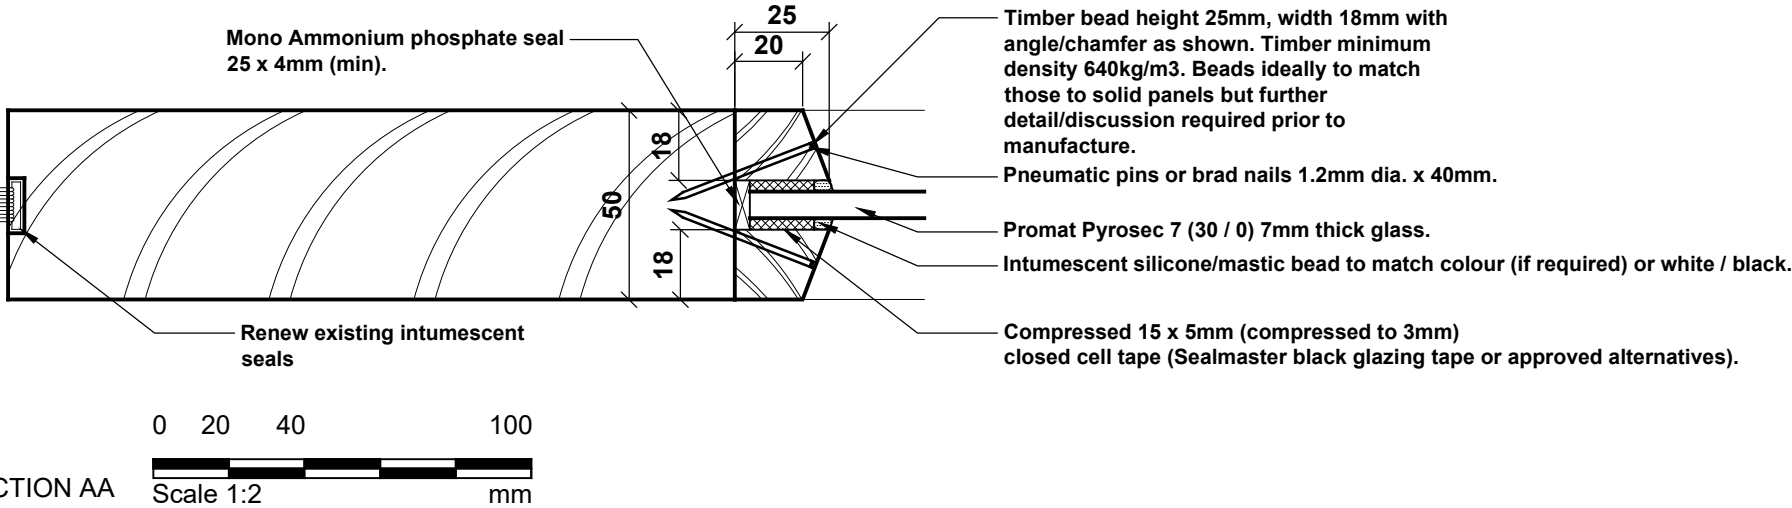

Notes 1. Any dwg format drawing is to be read in conjunction with and at the scale of the accompanying pdf. 2. Where colours other than black or grey are used, the drawing must be plotted in colour. 3. For status 'C' (Construction) drawings all dimensions are to be checked on site by the contractor, scaling is for Local Authority purposes only. 4. Unless otherwise indicated, all dimensions are in millimeters. 5. All information on this drawing is to be read in conjunction with the relevant Donald Insall Associates specification and trade contractors' drawings and information by specialists. 6. In the event of any discrepancy, please contact us immediately. 7. This drawing may contain survey information by others and is to be used solely for the purposes for which it was issued. 8. These are uncontrolled documents issued for information purposes only. If you have any queries regarding the drawings, please contact DIA immediately. 9. Please note DIA cannot be held responsible for any errors arising from changes made to an uncontrolled dwg file.		Status codes S0 Work in Progress D1 Suitable for Costing S1 Suitable for Co-ordination D2 Suitable for Tender S2 Suitable for Information D3 Suitable for Contractor Design S3 Suitable for Review & Comment D4 Suitable for Manufacture/Procurement S4 Suitable for Stage Approval A1,A2,A3, An etc. Approved and accepted as stage complete B1,B2,B3, Bn etc. Partially signed off, with minor comments from the Client CR Construction Record		<table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													