
LEO LED FL IP66 200W 840 PC 96630255

LED Floodlight

High power LED Floodlight with asymmetrical light distribution - ideal for building facades and footpaths. Compact and streamline design. Climate membrane for automatic climate regulation inside the floodlight. Surge protection up to 10kV. Pre-wired with main cable (3m). Integrated photocell.
Body: Aluminium die-cast (<5% copper)
Bracket: Steel, gray (RAL 9006)
Cover: Tempered glass
Lens: PC
Complete with 4000K LED, 20000lm. Class I electrical, IP66, IK08
Luminaire efficacy: 100 lm/W
Colour Rendering Index min.: 80
Rated median useful life: 50000h L70B50 at 25°C
Total power: 200W
Weight: 7,1 kg




TE_LEO_F_200.jpg

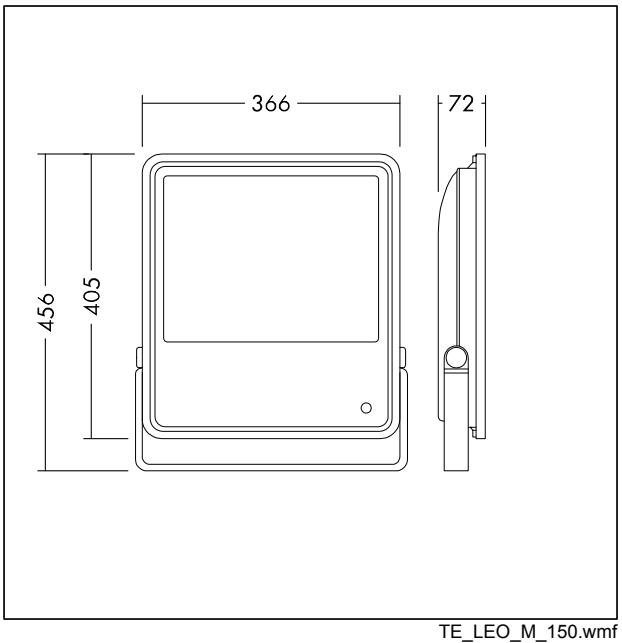

TE_LEO_M_150.wmf

Light Distribution STD - standard

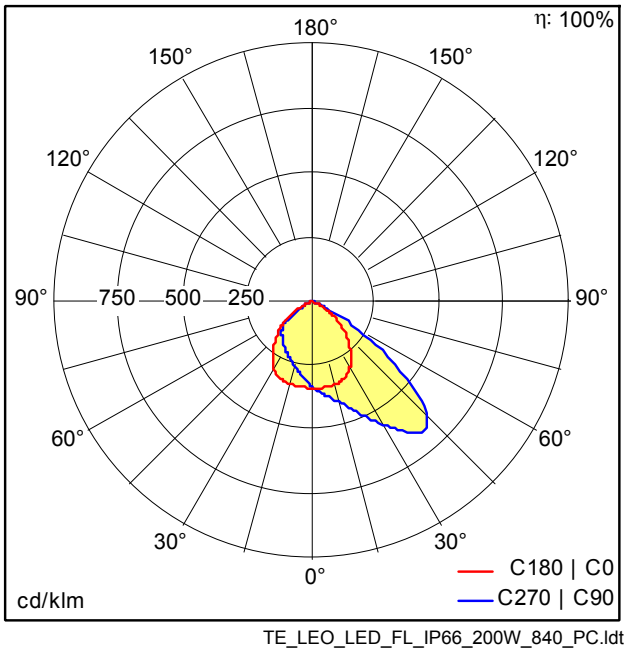

TE_LEO_LED_FL_IP66_200W_840_PC.ldt

- Light Source: LED
- Luminaire luminous flux*: 20000 lm
- Luminaire efficacy*: 100 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)*: 5
- Rated median useful life*:
  50000h L70 at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 200 W Lambda = 0.9

RoHS IP66 IK08 850°C Ta -20 +50

We reserve the right to make technical changes without prior notice. 20.08.2018 © ThornEco