



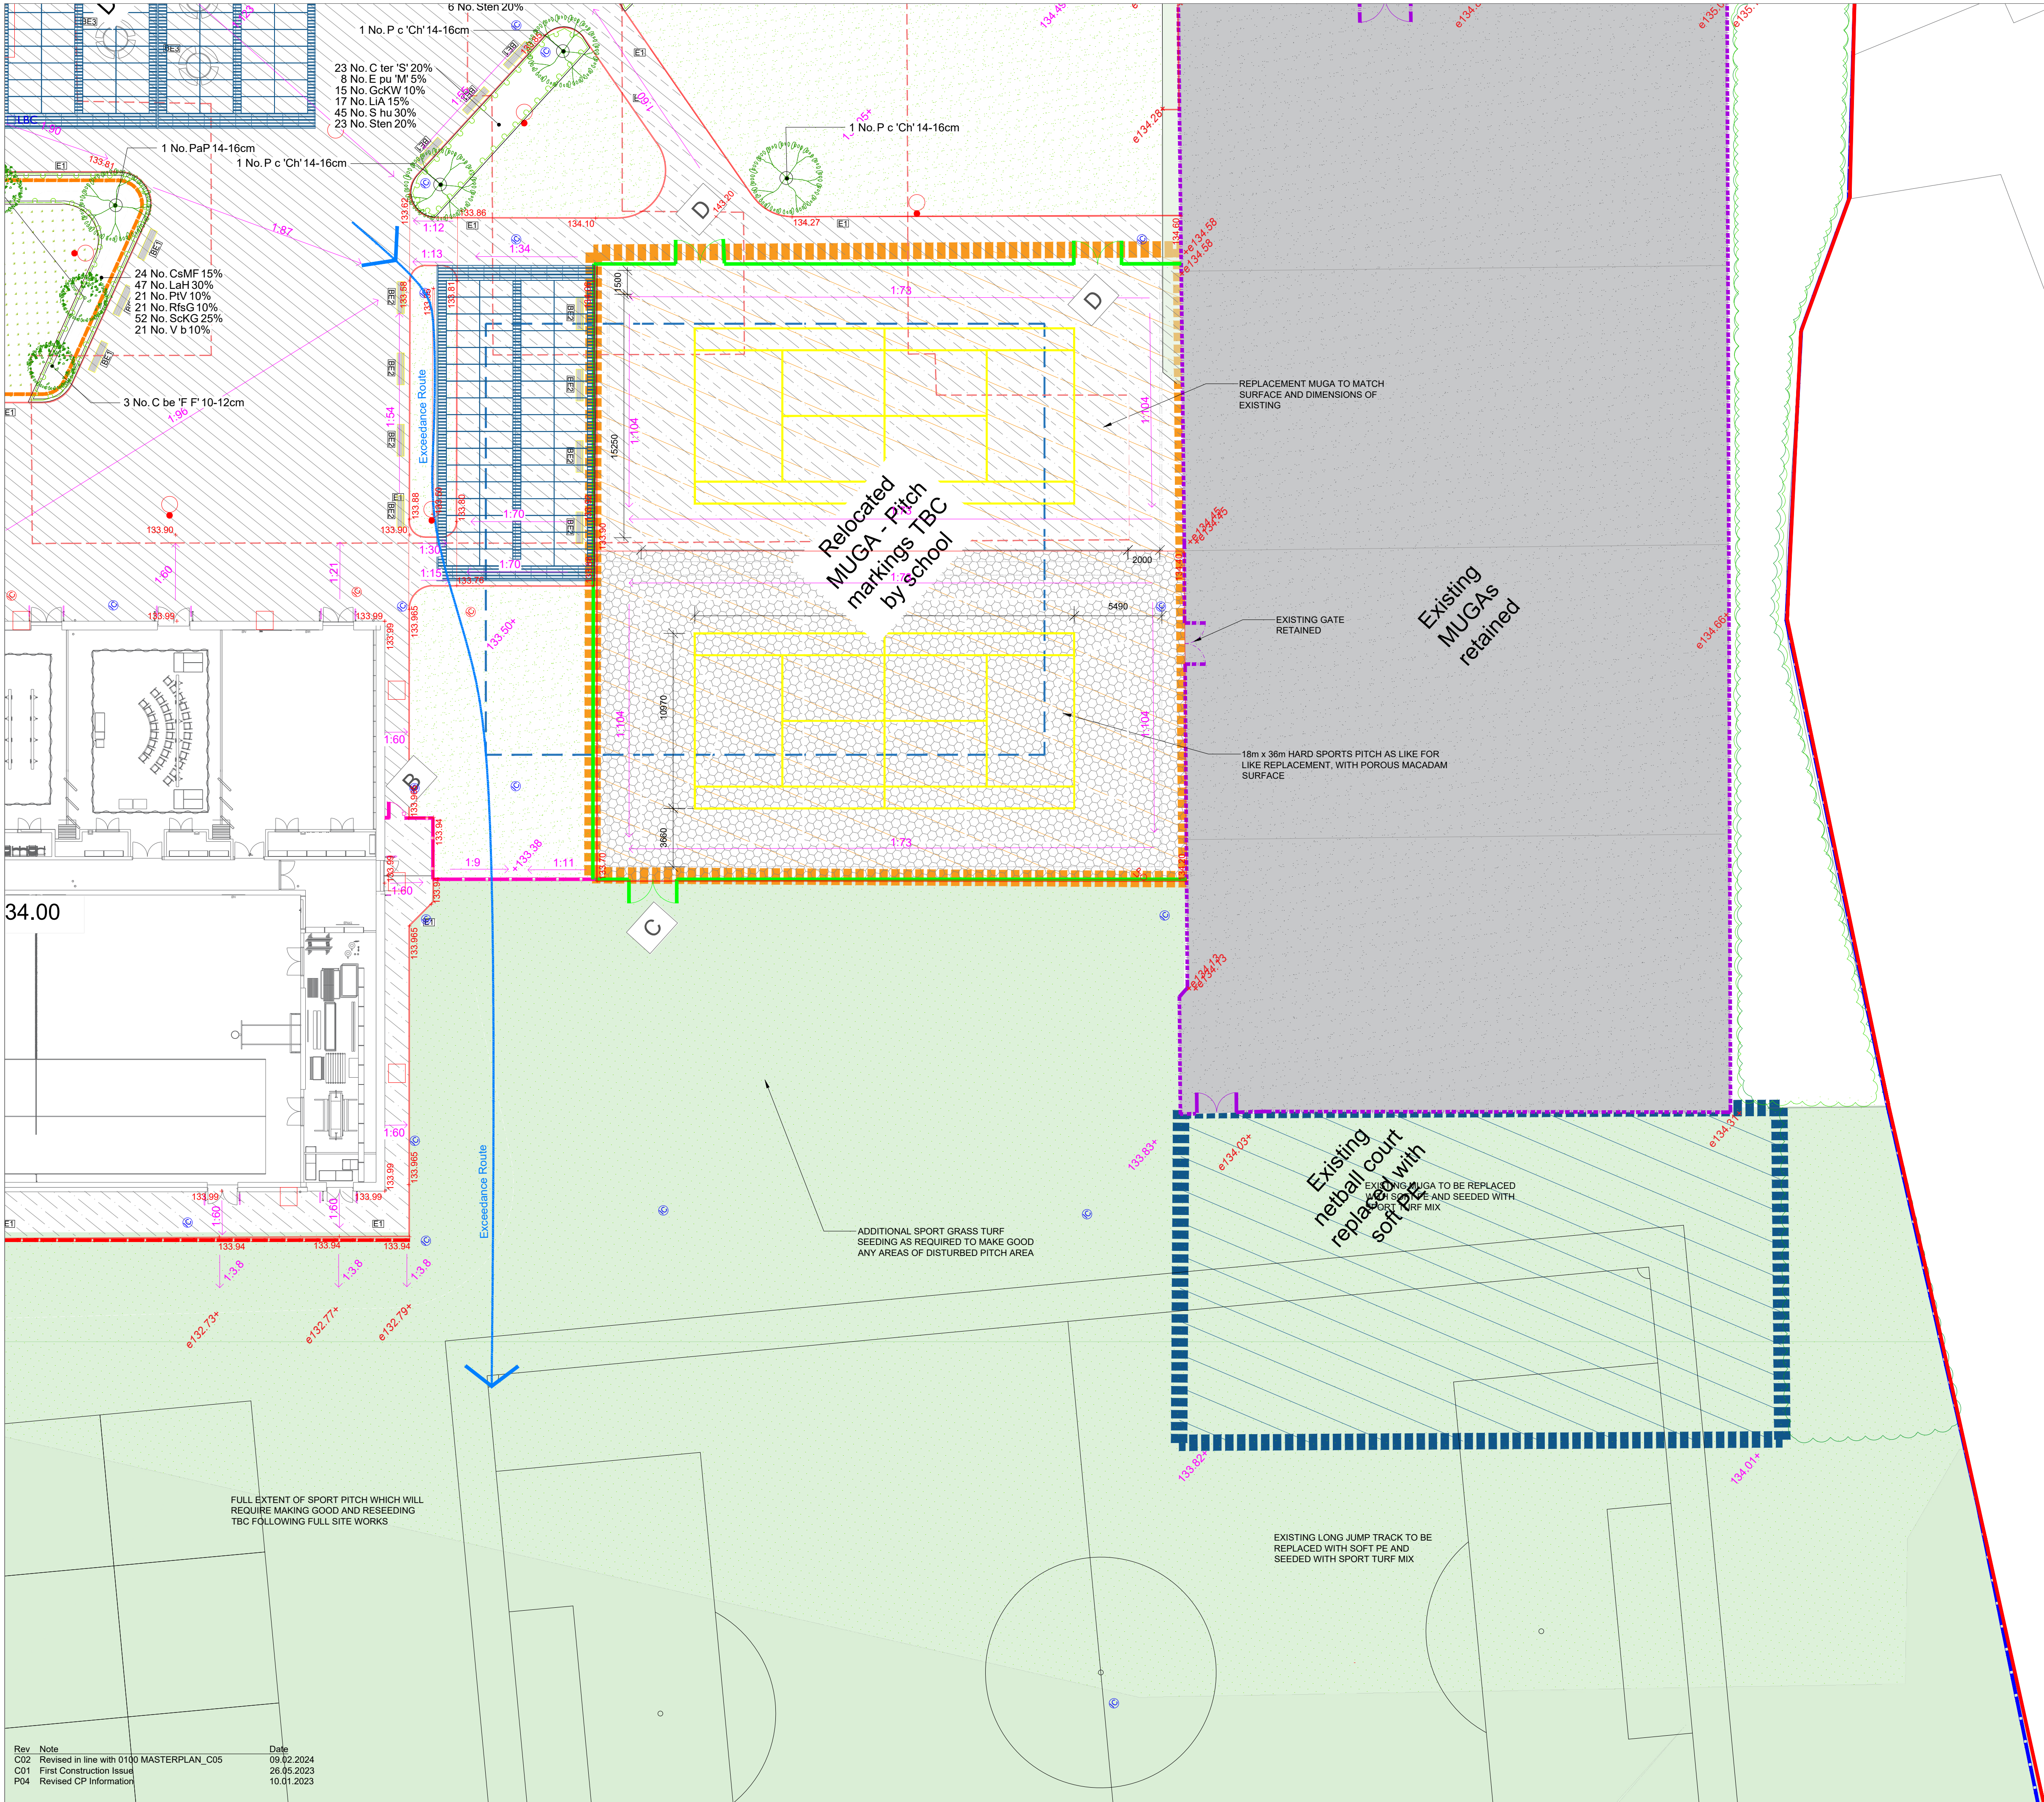

- SITE**
- EXISTING TREES TO BE RETAINED**
To be protected during the construction works to B55837:2012
Refer to Arboricultural Impact Assessment
- Q30 AMENITY GRASS SEEDING**
To be sown with Germinal Amenity 'WFG20 Eco Species Rich Lawn', or equal approved at a rate of 5g/m². 150mm topsoil required (Q28:701).
- Q30 MEADOW GRASS SEEDING**
To be sown with Germinal Amenity 'WFG15 Countryside, School and College' Mix, or equal approved at a rate of 5g/m². 150mm topsoil required (Q28:701).
- Q30 SPORTS TURF SEEDING**
To be sown with Germinal Amenity 'A30 Rapid Sports Renovator Plus' Mix, or equal approved at a rate of 35g/m². Topsoil and subsoil requirements to STRI Pitch specification.
- Q31 EXTRA HEAVY STANDARD TREE PLANTING**
Ornamental trees planted as Extra Heavy Standards, 14-16cm girth, 425-600cm ht, clear stem 175-200cm; root-balled, 2x transplanted, 4-5 brks. Supplied with single short stake and irrigation. 400mm topsoil on top of 500mm subsoil (Q28:701).
- Q31 STANDARD TREE PLANTING**
Ornamental and Native trees to be planted as Selected Standards, 10-12cm girth, 300-350cm ht, clear stem 175-200cm; root-balled, 2x transplanted, 4 brks. Supplied with single short stake and irrigation system. 400mm topsoil on top of 500mm subsoil.
- Q31 NATIVE HEDGE PLANTING**
Native tree and shrub mix to include *Acer campestre*, *Cotoneaster monogyna*, *Corylus avellana*, *Ilex aquifolium*, *Prunus spinosa*, *Rosa canina*, *Viburnum opulus*. Planted as 60-80cm, bare root, 1+1; Transplant - seed raised; branched. Planted with biodegradable spiral guards and bamboo canes in a double staggered row, at a density of 6/m. 400mm topsoil depth required (Q28:701). 75mm medium grade bark mulch.
- Q31 NATIVE SHRUB MIX**
Native shrub mix to include planted as 60-80cm, bare root, 1+1; Transplant - seed raised; branched. Planted with biodegradable spiral guards and bamboo canes in a double staggered row, at a density of 6/m. 400mm topsoil depth required (Q28:701). 75mm medium grade bark mulch.
- Q31 ORNAMENTAL HEDGE PLANTING**
Single species ornamental evergreen hedge planted as 100-120cm, bare root, 1+1; Transplant - seed raised; branched. Planted with biodegradable spiral guards and bamboo canes in a double staggered row, at a density of 5/m. 400mm topsoil depth required (Q28:701). 75mm medium grade bark mulch.
- Q31 ORNAMENTAL PLANTING**
Mix of nectar-producing shrubs and perennial species suitable for attracting invertebrates and ornamental grasses. 2-3L stock planted at a density of 5/m². Beds to be finished with 75mm depth medium grade bark mulch. 400mm topsoil depth required (Q28:701).
- Q31 BULB PLANTING**
Drifts of Spring-flowering bulbs planted at a rate of 15-20/m² e.g. *Narciss*, *Gallanthus*, *Crocus* sp.

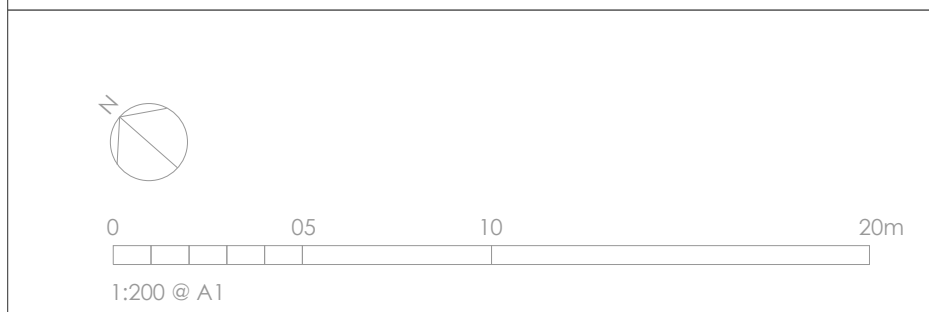

DEP LANDSCAPE ARCHITECTURE LTD

2 COMMERCIAL STREET
MANCHESTER, M15 4RQ
T: 0161 241 9878
E: info@dep.co.uk
W: www.dep.co.uk

Client
Morgan Sindall

Project
Newhouse Academy, Rochdale

Description
PLANTING PLAN 4 of 4

Status
Construction AH

Scale
1:200 @ A1

Drawing number
SRP1019-DEP-ZZ-00-DR-L-0204

Job number (Internal)
4847

Date
26.05.23

Revision
C02

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement. Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.

Rev	Note	Date
C02	Revised in line with 0100 MASTERPLAN_C05	09.02.2024
C01	First Construction Issue	26.05.2023
P04	Revised CP Information	10.01.2023