


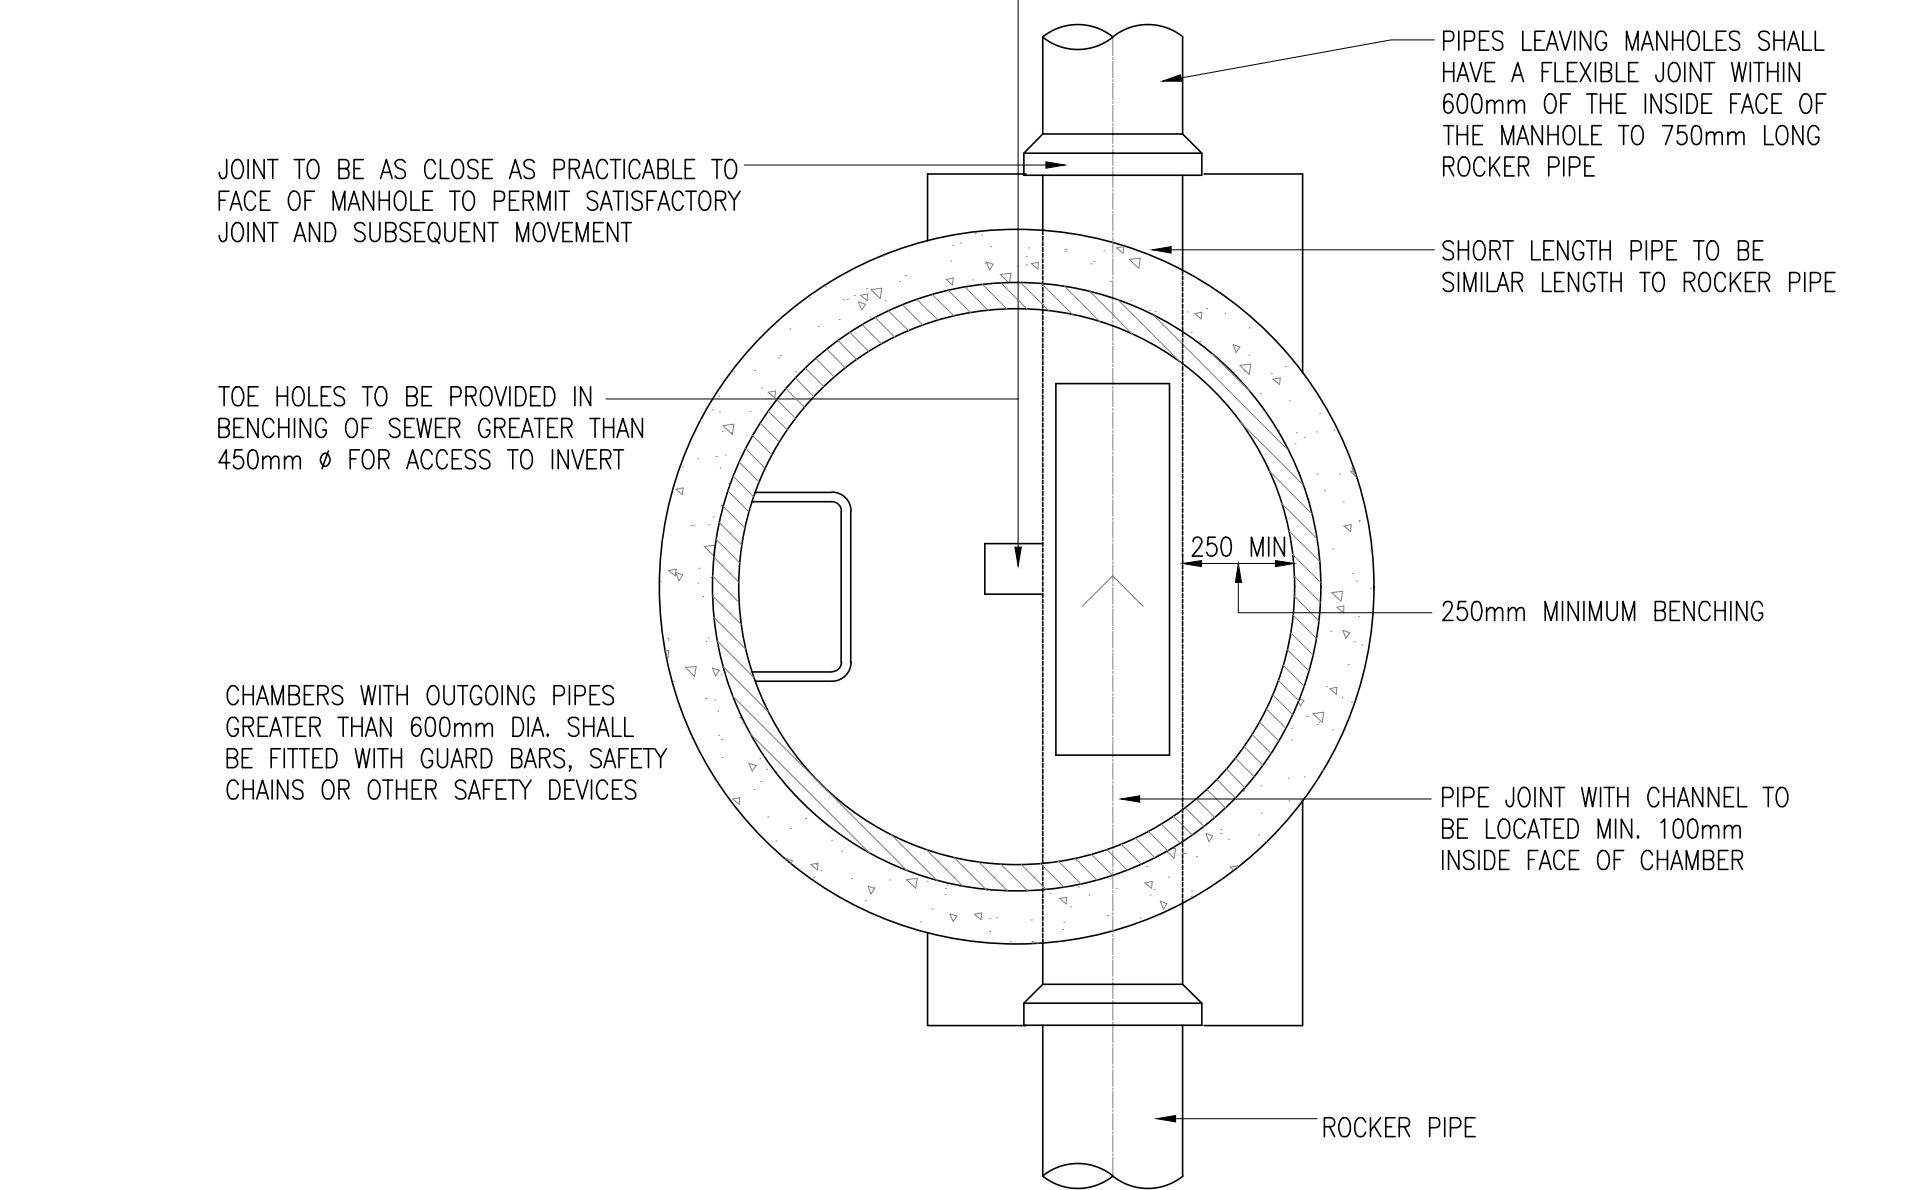

COMPRESSIBLE JOINT FILLER 18mm THICK

150 <375 $\phi$  150

150

150

FOR PIPES DIAMETER 375mm OR LESS

150 >375 $\phi$  150

FOR PIPES DIAMETER EXCEEDING 375mm

DOWNPIPE UP TO 110mmø

CEMENT MORTAR JOINT

ACCESS GULLY WITH INTEGRAL VERTICAL BACK INLET

PLASTIC STOPPER

150mm CONCRETE SURROUND

POLYPROPYLENE COUPLING

COVER & FRAME TO BE CLASS D400 TO BS EN 124 ON CLASS M1 MORTAR BED & HAUNCH WITH MIN CLEAR OPENING (SEE TABLE)

1-3 SECTIONS OF COVER FRAME SEATING RINGS BEDDED IN CLASS M1 MORTAR

PCC SHAFT, CHAMBER SECTIONS & COVER SLAB TO BE BEDDED WITH CLASS M1 MORTAR

INVERTS FORMED GENERALLY USING CHANNEL PIPES

GEN3 CONCRETE

CONSTRUCTION JOINT

225 TO BARREL OF PIPE


75 MIN

150

DOUBLE STEP

OPENING IN COVER SLAB (SEE TABLE)

Diagram illustrating the installation of a rocker pipe assembly into a wellhead. The assembly consists of a rocker pipe (500-750 LONG) and a pipe joint with a channel (100mm MIN INSIDE FACE OF CHAMBER). The rocker pipe is shown with a 225 MIN diameter. The pipe joint is shown with a 225 MIN diameter. The distance between the centerlines of the two pipes is 150. The flow direction is indicated by an arrow labeled "FLOW".

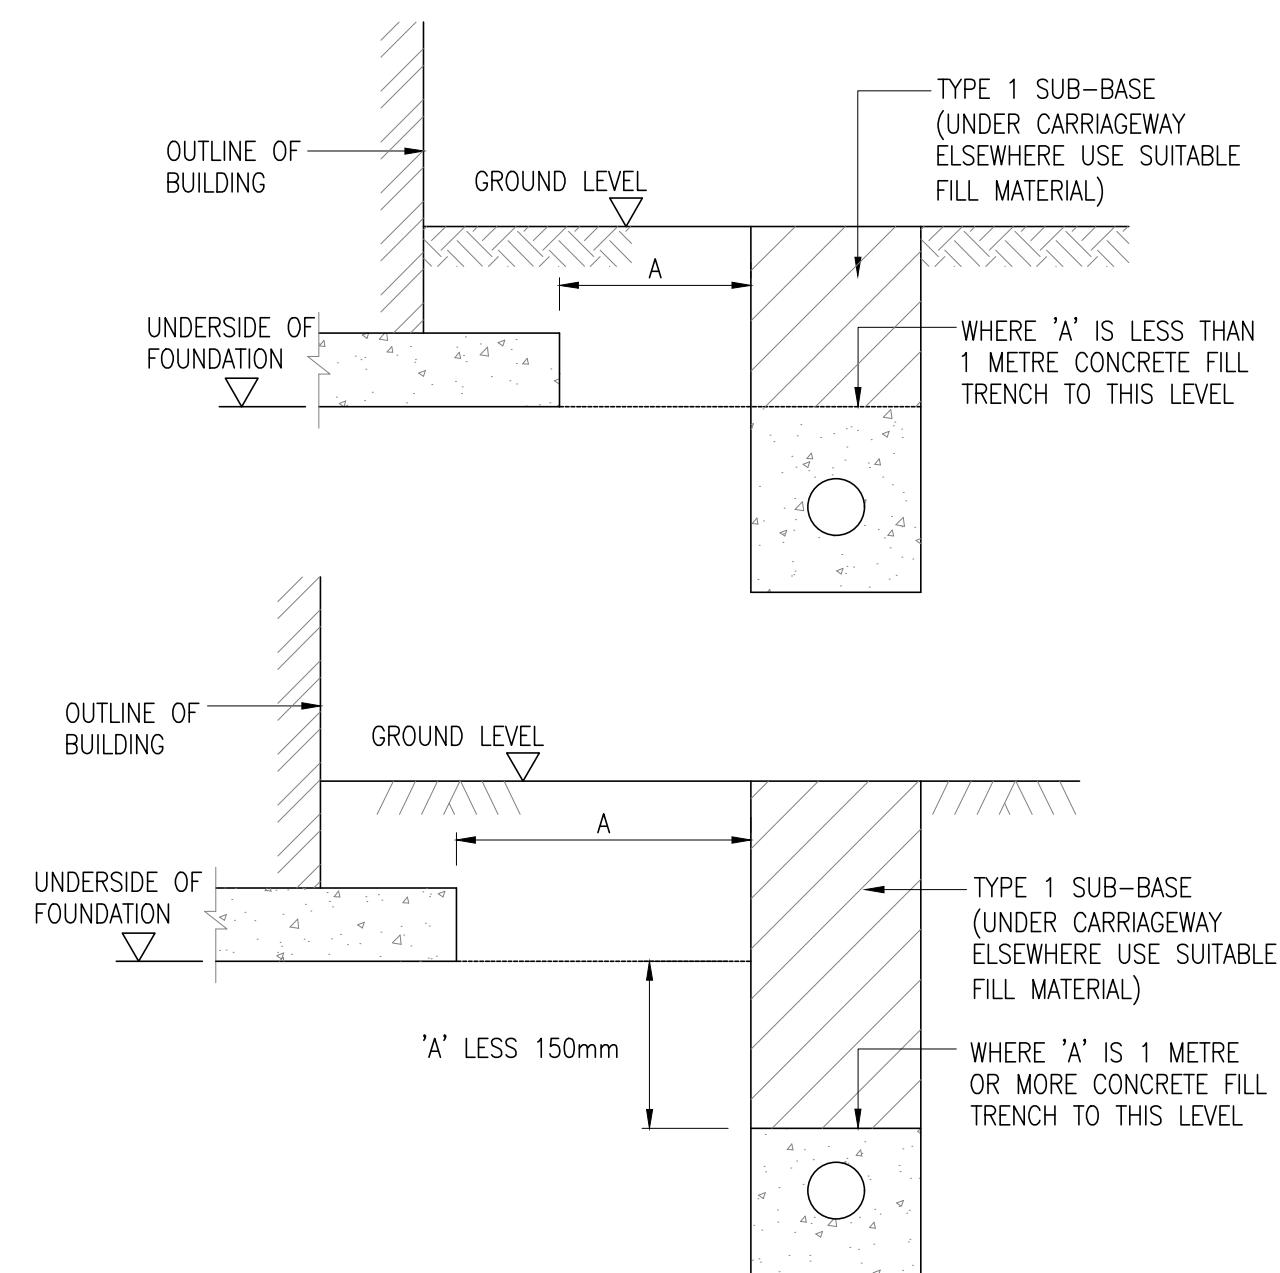

MIN 450 WIDE AND 600 DEEP APPROX  
TRENCH WITH NO FINES STONE FILL  
AND 100# PERFORATED FILTRATION PIPE  
TRENCH TO BE WRAPPED WITH  
PERMEABLE TERRAZO LINER

600 APPROX

450

**AJP** consulting engineers  
est. 1978  
t 0151 227 1462 e info@ajpltd.co.uk 01 Dale Street, Liverpool, L2 2ET