

CLD Ultimate

Profiled Panel System



A high quality and versatile perimeter fencing system, Ultimate is available with either 3, 4 or 5 profiles depending on the height. Profiled sections increase the rigidity of the panels.

Ultimate panels are fixed to posts using full length clamp bars, making for an exceptionally secure and difficult to climb perimeter.


Ideal for

- Schools
- Industrial estates
- Carparks

Conforms to



Isometric View

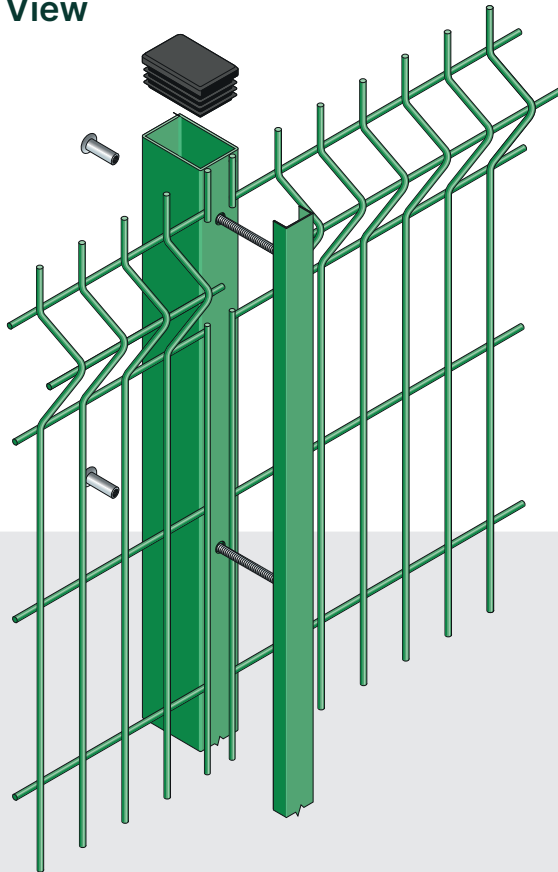

Key Features

Difficult to climb

Approved by many planning authorities

Anti-vandal fasteners

Scan the QR code to find out more



Product Technical Information

Standard:	BS1722-14: 2017 BS EN ISO 1461: 2009 BS EN 13438: 2013
Panel type:	Mesh and wire with 3, 4 or 5 profiles, as required. Galvanised and powder-coated to minimum 60 microns
Panel width:	2485mm up to 2435mm high & 2021mm at 3007mm high
Wire diameter:	5mm
Mesh size:	165mm x 38mm
Available heights Select as required:	3 profiles: 1782mm only 4 profiles: 2035mm, 2435mm 5 profiles: 3007mm
Nominal height:	3 profiles: 1.8m 4 profiles: 2m, 2.4m 5 profiles: 3m
Finish:	Polyester powder-coated to minimum 60 microns. Any RAL colour including marine grade and metallics.
Top edge projection:	30mm
Panel installation:	Bottom of panel maximum 40mm above ground or as required.
Security topping options:	Options available on request
Posts:	RHS, galvanised after manufacture and polyester powder-coated to match fencing
Post dimensions:	60mm x 40mm for 1782mm to 2435mm height panels. 80mm x 40mm for 3007mm height panels.
Maximum post centres:	2495mm for 1782mm, 2035mm and 2435mm heights 2031mm for 3007mm height only
Fixings:	41mm x 21mm clamping channel. CLD SafeTFix™ hidden fixing system.
Foundations:	Set posts in holes minimum 300mm square or 400mm diameter round x 800mm deep. Base plated option also available.
Note:	Contractor/ client is responsible for the foundation size suitable for the ground conditions and height.
Warranty:	Minimum of 15 years against manufacturing defects

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - 20230106_CLD_Ultimate_DS