


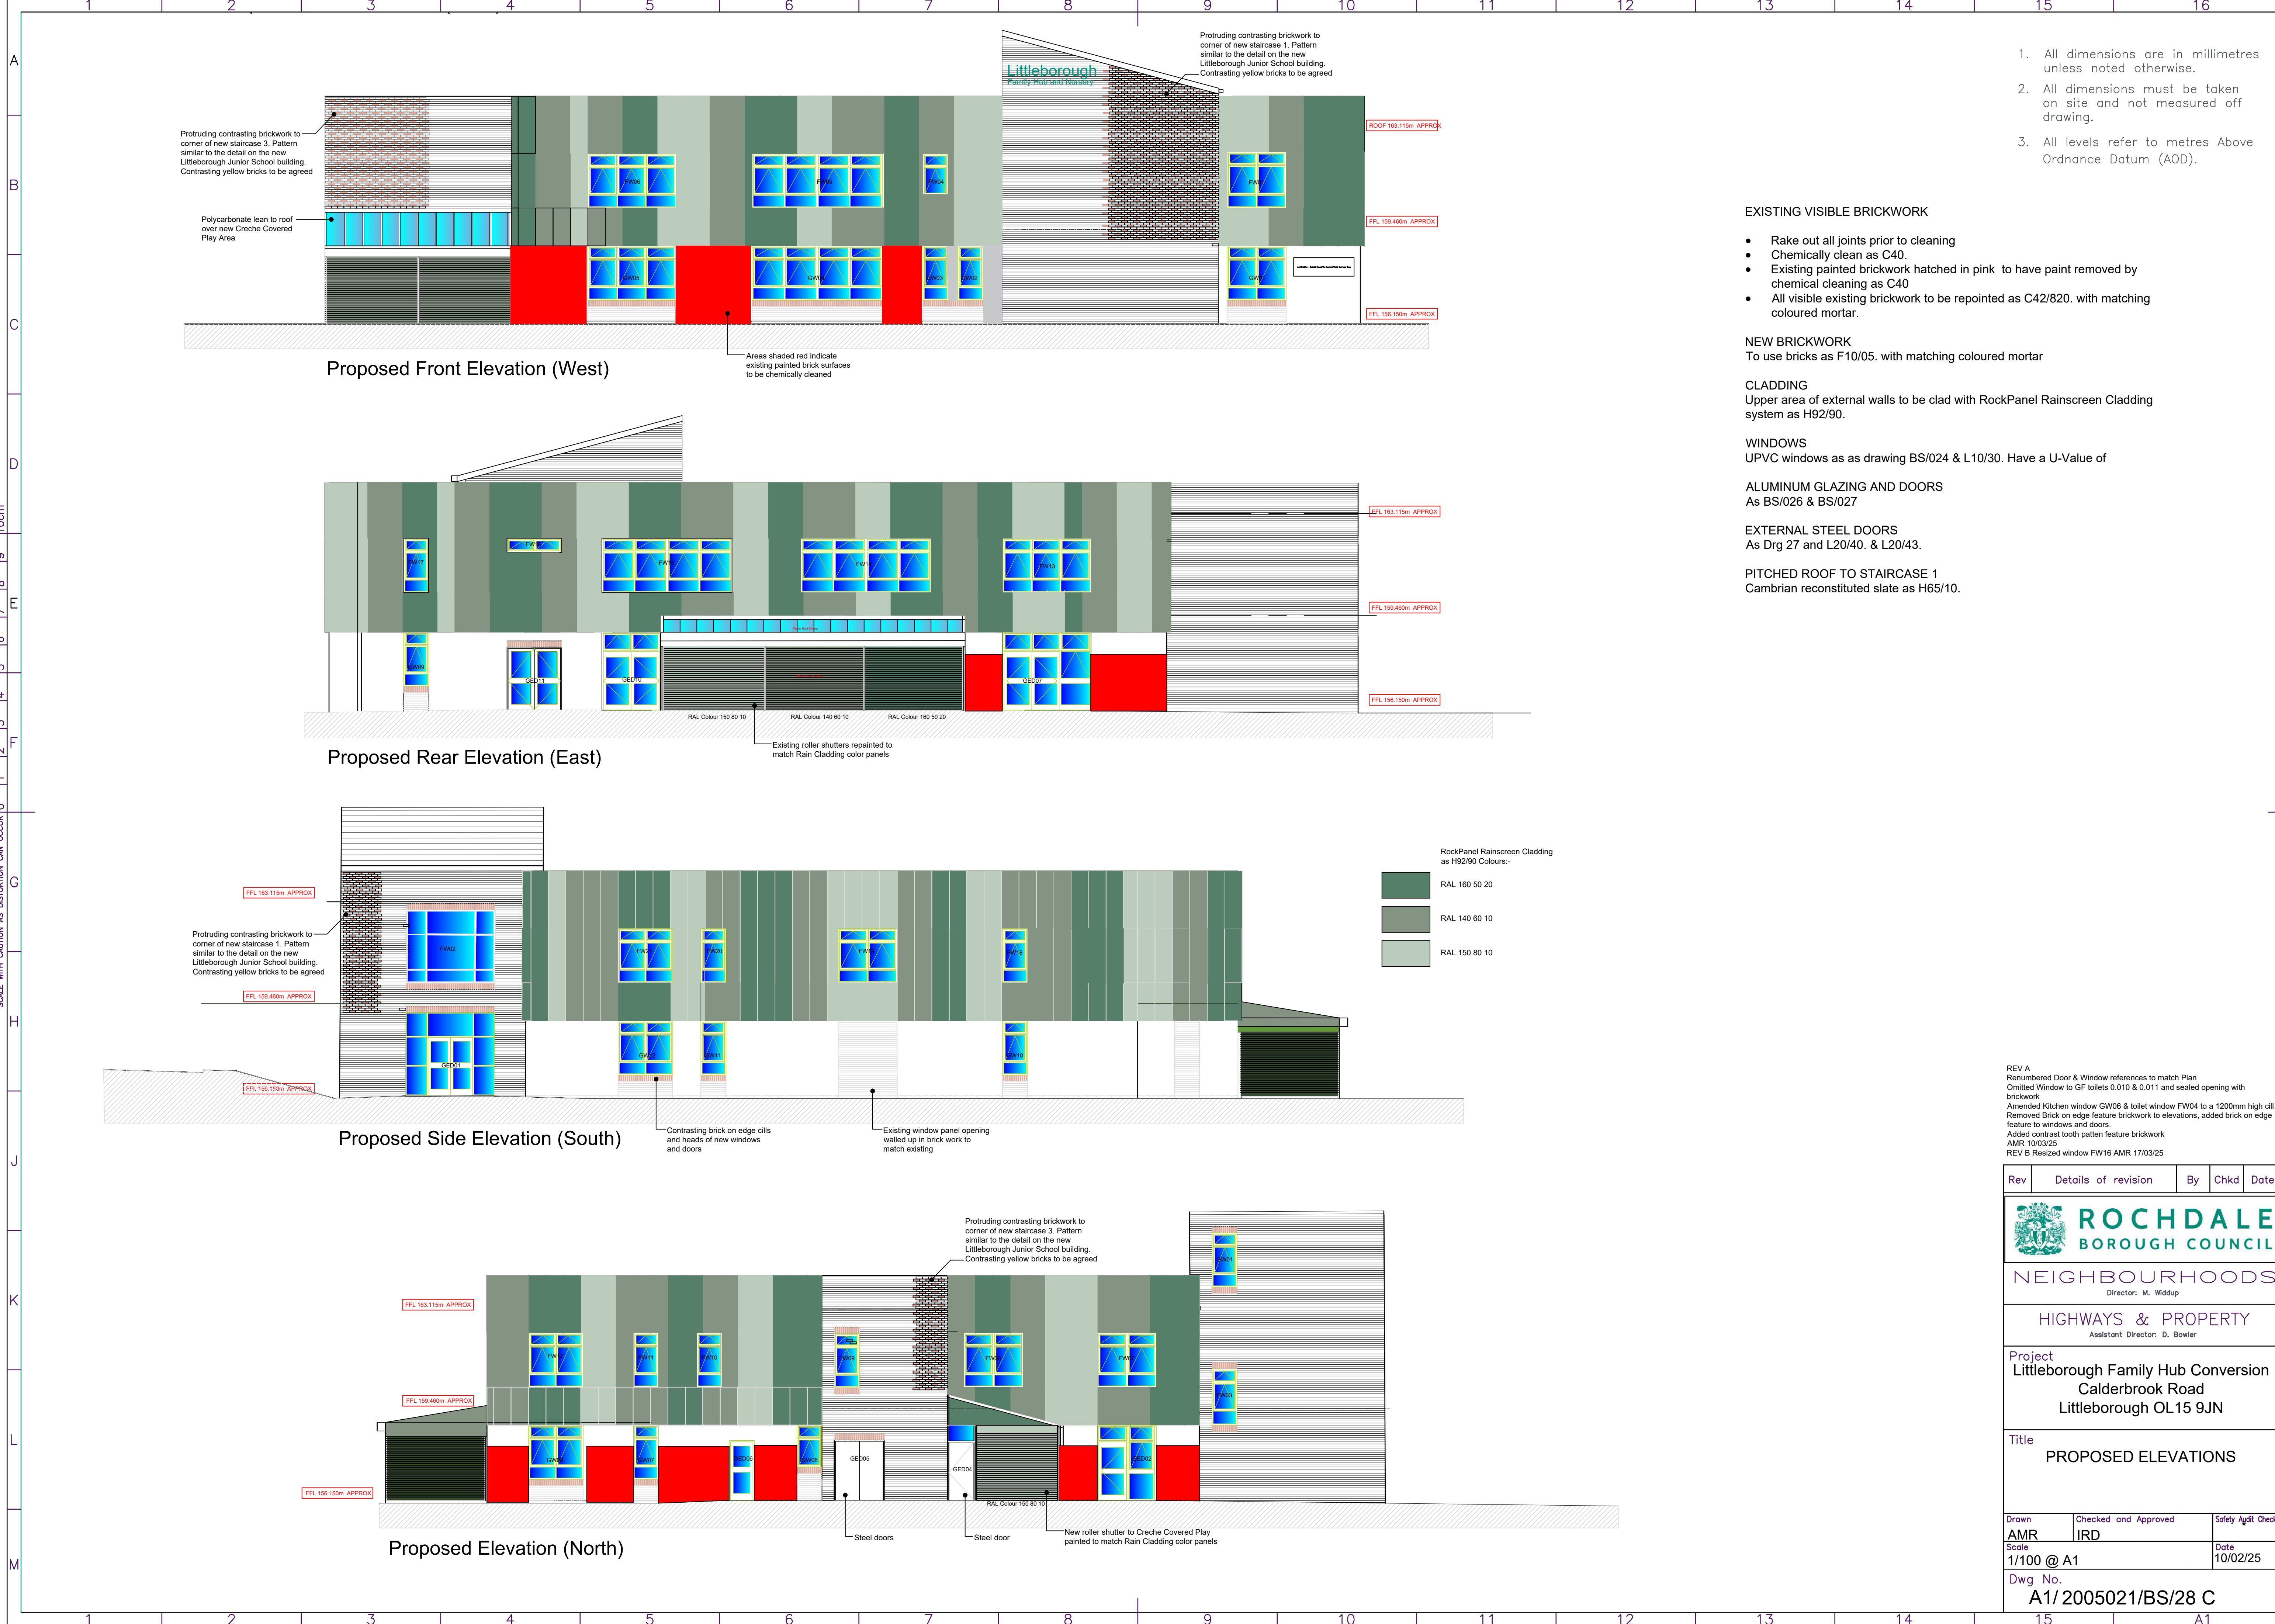

1. All dimensions are in millimetres unless noted otherwise.
2. All dimensions must be taken on site and not measured off drawing.
3. All levels refer to metres Above Ordnance Datum (AOD).

EXISTING VISIBLE BRICKWORK

- Rake out all joints prior to cleaning
- Chemically clean as C40.
- Existing painted brickwork hatched in pink to have paint removed by chemical cleaning as C40
- All visible existing brickwork to be repointed as C42/820. with matching coloured mortar.

NEW BRICKWORK

To use bricks as F10/05. with matching coloured mortar

CLADDING

Upper area of external walls to be clad with RockPanel Rainscreen Cladding system as H92/90.

WINDOWS

UPVC windows as as drawing BS/024 & L10/30. Have a U-Value of

ALUMINUM GLAZING AND DOORS

As BS/026 & BS/027

EXTERNAL STEEL DOORS

As Drg 27 and L20/40. & L20/43.

PITCHED ROOF TO STAIRCASE 1

Cambrian reconstituted slate as H65/10.

REV A
Renumbered Door & Window references to match Plan
Omitted Window to GF toilets 0.010 & 0.011 and sealed opening with brickwork
Amended Kitchen window GW06 & toilet window FW04 to a 1200mm high cill.
Removed Brick on edge feature brickwork to elevations, added brick on edge feature to windows and doors.
Added contrast tooth pattern feature brickwork
AMR 10/03/25
REV B Resized window FW16 AMR 17/03/25

Rev	Details of revision	By	Chkd	Date
-----	---------------------	----	------	------



NEIGHBOURHOODS
Director: M. Widdup

HIGHWAYS & PROPERTY
Assistant Director: D. Bowler

Project
Littleborough Family Hub Conversion
Calderbrook Road
Littleborough OL15 9JN

Title
PROPOSED ELEVATIONS

Drawn AMR	Checked and Approved IRD	Safety Audit Check
Scale 1/100 @ A1	Date 10/02/25	

Dwg No.
A1/ 2005021/BS/28 C