



21314

BRANCH ROAD FARM, BRANCH ROAD
LITTLEBOROUGH – OL15 0AB

May 2021

Revised: 24th June 2022

Brunel House Milnrow Rochdale OL16 3NJ

t: 01706 343961 e: office@healeyconsulting.co.uk

REPORT ON STRUCTURE

CONTENTS

1.00 INTRODUCTION

2.00 DESCRIPTION

3.00 RECONSTRUCTION PHILOSOPHY & DESIGN CONSIDERATIONS

4.00 CONCLUSIONS & RECOMMENDATIONS

5.00 EXCLUSIONS

APPENDIX A - ELEVATIONS AS EXISTING

APPENDIX B - ELEVATIONS AS PROPOSED

APPENDIX C – PHOTOGRAPHS

**APPENDIX D – METHOD STATEMENT & TYPICAL CONSTRUCTION DETAILS
(HC Drawing 21314-01,02, 03B, 04A.)**

1.00 INTRODUCTION

- 1.01** We were requested by Mr Wildman to carry out a survey and to provide a report on the structure of the property known as The Barn, Branch Road Farm, Littleborough. See photograph 1.
- 1.02** The purpose of the report was to assess the structural suitability of the remaining structure for reinstatement and conversion to a domestic dwelling. The report is to be used to aid a planning application and to help identify to the Planning Officers, the intentions of Mr Wildman and his Design / Construction Team.
- 1.03** For the purposes of this report all references to left, right, front and rear should be taken as viewing the property from Branch Road.
- 1.04** This report has been carried out on a purely visual basis. We have not inspected parts of the property which are covered, unexposed or inaccessible and such parts are assumed to be in good repair and condition.
- The report does not purport to express an opinion about or to advise upon the condition of any uninspected parts, and should not be taken as making any implied representation or statement about such parts.
- We have not inspected nor tested the drains and other services and are therefore not in a position to advise upon any defects.
- 1.05** This report has been carried out for guidance of the person named overleaf in his pursuance of planning permission for conversion of the barns to domestic use and should not be used as a specification for carrying out the works.
- 1.06** This report has been carried out for the person named overleaf to be used in connection with their purchase, selling or repair of the property and should not be copied or sold to any other persons without the agreement of Healey Consulting.

This report remains the property of Healey Consulting and is copyright

2.00 DESCRIPTION

2.01 The part of the property to be converted originally comprised of a stone barn of two storey proportions with a single storey rear lean-to occupying the full length of the rear elevation. During the first attempt of the conversion, a number of walls became unstable and partial collapse occurred. This we feel, was partially attributable to the loss of restraint following the removal of the roof.

2.02 Drawings depicting the barn as existing at the time of our inspection are appended to the rear of this report, along with photographs taken at the same time.

2.03 The barn is attached to an existing, occupied farmhouse.

The ground floor of the farmhouse is raised approximately 950mm above that of the barn. The two share the same ridge line.

The party wall, with the farmhouse, is to remain as a party wall in the new development. See photograph 2.

2.04 The remaining barn walls are faced with a coursed local stone with narrow beds joints. See photograph 3. The inner leaf is of random stone and there is a poor, loose rubble fill. See photograph 4.

2.05 On the front elevation there is an existing large cart arch, two nominal window openings and a personnel door. See photograph 5.

2.06 The existing front elevation is complete up to within a few stone courses below eaves level. See photograph 6.

2.07 The left-hand side and rear elevations became unstable during demolitions and now only remain in part. See photographs 7, 8 & 9 - side elevation and photographs 10, 11 & 12 – rear elevation.

2.08 The roof structure no longer exists. The slates were removed and are palletised on the side for re-use.

2.09 Where the walls have been taken down or collapsed due to instability, all facing stones, feature lintels and mullions have been kept for re-use. These are also on site and can be viewed if deemed necessary.

2.10 The existing floor slab currently remains. This is a mixture of different surfaces set at varying levels. See photographs 13 & 14.

3.00 DISCUSSION

3.01 EXTERNAL WALLS

The proposed elevations are shown using the original planning drawings. Appendix B.

The front elevation is predominantly as original. Notwithstanding the formerly approved additional window openings, the elevation is to remain undisturbed.

The external face of this elevation is deemed to be plumb to within acceptable tolerances and there has been little or no movement to the inner face.

The inner face is of random stone set in a relatively poor, lime mortar matrix. With local patch re-pointing in a lime mortar the inner leaf is deemed to be capable of being retained. In order to help stabilise the wall and avoid any further collapse, it is intended to carefully remove any loose mortar from the inner face and patch point as described.

The wall will be extended to eaves level, faced with the original coursed stone. The remaining partial elevations on the left and rear will be stabilised in a similar manner.

Prior to any further reconstruction, the existing floor slab will be removed and replaced with a new reinforced concrete raft. A typical detail is shown in Appendix D.

This detail will allow an internal blockwork leaf to be constructed without disturbing any existing foundations or walls. This will result in a slight loss of internal floor space. The ultimate design will be subject to Building Control Approvals. We have had discussions with Mr D Oakes of RMBC to this end.

The blockwork inner leaf will become the loadbearing element of the structure, thereby ensuring that there is no further physical disturbance to the original walls. The inner leaf will be tied to the original wall or outer leaf. Thereby increasing the lateral stability.

The roof and internal floors will be supported by the blockwork. During construction, both leaves will be brought up together such that there is no temporary instability of the walls.

Original facing stones will be used for the re-build. We estimate 90 to 95% of the stone facings have been salvaged.

Where new stone, including mullions, lintels and cills are needed, these will be obtained to match the existing and will be subject to approval by the lead Planning Authority.

On completion, the external elevations will be totally repointed in a style and manner to be agreed. A lime-based mortar will be used.

3.02 ROOF

There is currently no roof on the property. This was always to be replaced.

The roof structure will be of traditional construction, utilising timber rafters and purlins.

The introduction of a number of conservation roof lights has been previously agreed with the Planning Authority.

The original slate will be re-used, and any additional slates will be sourced to match.

Tying details will be employed to ensure the roof does not spread and will offer restraint to the new walls.

3.03 UPPER FLOORS

The second floor will be of timber construction and the first floor will be a pre-cast concrete floor of a beam and block nature. Each will be supported by new internal walls and steel beams where necessary. No vertical load will be applied to any of the existing walls, including the party wall.

The raft will be designed to equalise the bearing pressure under any thickenings. This is to avoid the potential of differential settlement.

3.04 GROUND FLOOR

The ground floor will be a ground supported RC raft.

The floor will be insulated.

3.05 METHOD STATEMENT

A more detailed method statement for the re-build, along with typical construction details, can be found in Appendix D.

4.00 CONCLUSIONS & RECOMMENDATIONS

- 4.01** We believe the collapse of the left-hand side and the rear elevation was inevitable given the condition of the walls and the poor quality of the inner leaf matrix and the loose rubble fill. See photographs 15 & 16. The loss of lateral restraint due to the removal of the roof was also a contributing factor.

It is obviously essential that no further collapse occurs and that any rebuild is undertaken with materials re-claimed from the site and in a manner in keeping with the original construction.

- 4.02** To this end, we have recommended action that will stabilise the remaining elements prior to any further work being undertaken.

The elevations to be rebuilt will be backed up with a blockwork inner leaf. This will need to step around areas of the external wall that remain standing.

- 4.03** To facilitate the construction, the local debris from the collapsed walls will need to be removed from the footprint of the building. The base stone course at ground level will then need to be prepared to receive the re-claimed facings.

- 4.04** Once this debris is removed from the footprint, the floor slab will be carefully broken out and removed from site. A new insulated concrete raft with relevant thickenings will form the base / foundation for the inner leaf and any internal load bearing walls.

- 4.05** Both leaves of the new external walls will be constructed in tandem, such that the wall does not become unstable during construction. Internal load bearing walls will, where possible, be tied to the inner leaf of the external walls to provide buttressing and lateral restraint.

A more detailed method statement, with sketches, is provided in Appendix D.

- 4.06** Given the nature of the remaining wall construction, it is in our opinion that the collapse was unfortunate but inevitable.

To leave the barn in its current state would, we feel, constitute a danger. The front elevation would ultimately collapse, potentially causing damage to the adjacent occupied dwelling.

We are clearly aware that 60%+ of the elevations now need to be rebuilt and that this is outside normal guidelines for conversions of this type, but given the current situation, we strongly recommend that the conversion is allowed to be completed in a controlled manner.

SIGNED... *P. Healey*.....

PAUL MICHAEL HEALEY
BSc (Hons) C.Eng M.I. Struct.E. M.a.P.S.


REVISED:...24th June 2022

APPENDIX A
ELEVATIONS AS EXISTING




APPENDIX B
ELEVATIONS AS PROPOSED




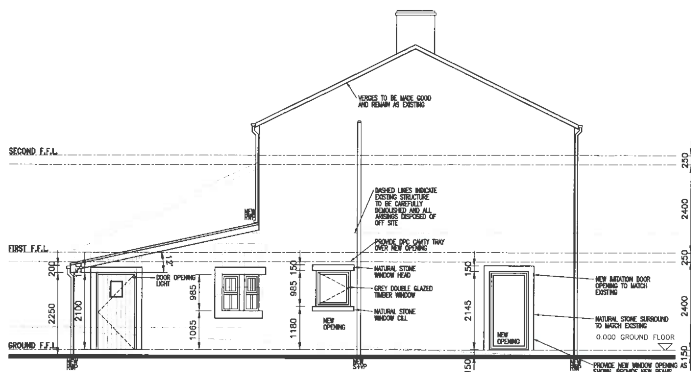

Proposed Side Elevation

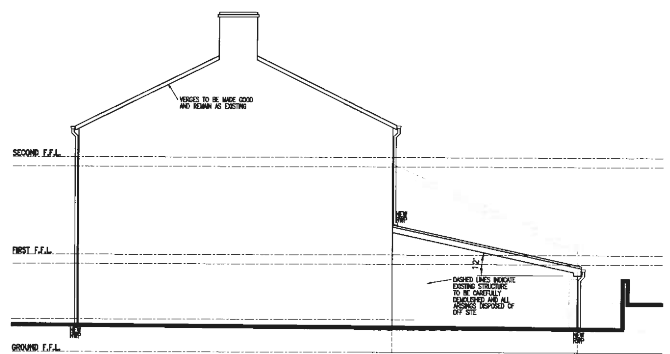

Proposed Side Elevation

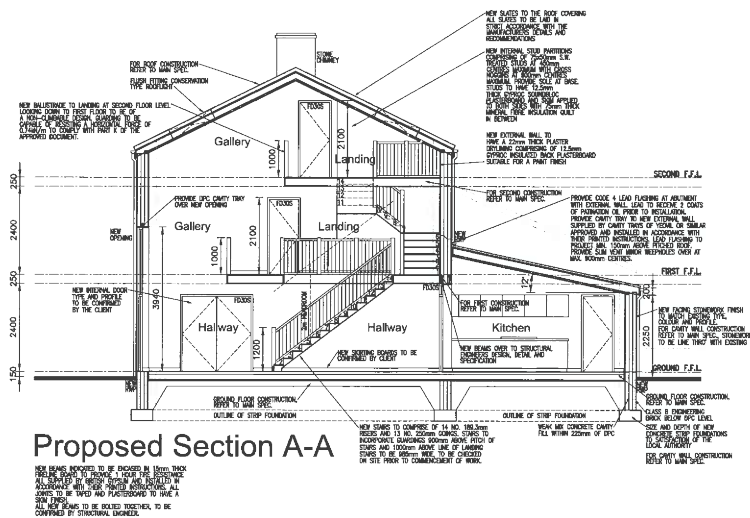

Proposed Section A-A



MAGNUS		Magnus Technical Engineering Ltd.	
Branch Road Farm		Branch Road Farm	
Littleborough		Littleborough	
OL15 9AS		OL15 9AS	
Project		Drawing Title	
Mr & Mrs Wickman		Proposed Elevations	
Branch Road Farm		Sheet 2 of 2	
Drawing No.		Date	
WILDMAN/07		Mar '18	
Drawn by		Scale	
P.E.		1:50	
Check by		Date	
P.E.		Mar '18	

APPENDIX C
PHOTOGRAPHS





Photograph 1



Photograph 2



Photograph 3



Photograph 4



Photograph 5



Photograph 6



Photograph 7



Photograph 8



Photograph 9



Photograph 10



Photograph 11



Photograph 12



Photograph 13



Photograph 14



Photograph 15




Photograph 16

APPENDIX D
METHOD STATEMENT & TYPICAL CONSTRUCTION DETAILS





EXISTING FRONT ELEVATION @ TIME OF SURVEY - VIEWED FROM BRANCH ROAD

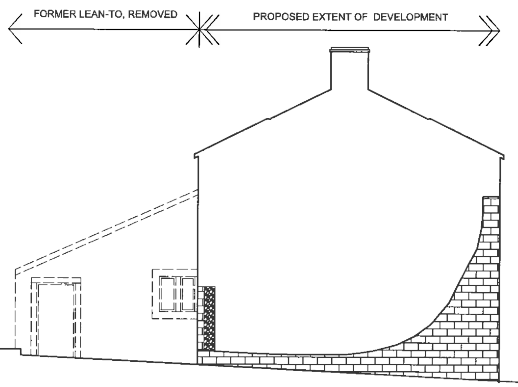


EXISTING SIDE ELEVATION @ TIME OF SURVEY

REV	DATE	BY	DETAILS OF REVISION
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			
101			
102			
103			
104			
105			
106			
107			
108			
109			
110			
111			
112			
113			
114			
115			
116			
117			
118			
119			
120			
121			
122			
123			
124			
125			
126			
127			
128			
129			
130			
131			
132			
133			
134			
135			
136			
137			
138			
139			
140			
141			
142			
143			
144			
145			
146			
147			
148			
149			
150			
151			
152			
153			
154			
155			
156			
157			
158			
159			
160			
161			
162			
163			
164			
165			
166			
167			
168			
169			
170			
171			
172			
173			
174			
175			
176			
177			
178			
179			
180			
181			
182			
183			
184			
185			
186			
187			
188			
189			
190			
191			
192			
193			
194			
195			
196			
197			
198			
199			
200			
201			
202			
203			
204			
205			
206			
207			
208			
209			
210			
211			
212			
213			
214			
215			
216			
217			
218			
219			
220			
221			
222			
223			
224			
225			
226			
227			
228			
229			
230			
231			
232			
233			
234			
235			
236			
237			
238			
239			
240			
241			
242			
243			
244			
245			
246			
247			
248			
249			
250			
251			
252			
253			
254			
255			
256			
257			
258			
259			
260			
261			
262			
263			
264			
265			
266			
267			
268			
269			
270			
271			
272			
273			
274			
275			
276			
277			
278			
279			
280			
281			
282			
283			
284			
285			
286			
287			
288			
289			
290			
291			
292			
293			
294			
295			
296			
297			
298			
299			
300			
301			
302			
303			
304			
305			
306			
307			
308			
309			
310			
311			
312			
313			
314			
315			
316			
317			
318			
319			
320			
321			
322			
323			
324			
325			
326			
327			
328			
329			
330			
331			
332			
333			
334			
335			
336			
337			
338			
339			
340			
341			
342			
343			
344			
345			
346			
347			
348			
349			
350			
351			
352			
353			
354			
355			
356			
357			
358			
359			
360			
361			
362			
363			
364			
365			
366			
367			
368			
369			
370			
371			
372			
373			
374			
375			
376			
377			
378			
379			
380			
381			
382			
383			
384			
385			
386			
387			
388			
389			
390			
391			
392			
393			
394			
395			
396			
397			
398			
399			
400			
401			
402			
403			
404			
405			
406			
407			
408			
409			
410			
411			
412			
413			
414			
415			
416			
417			
418			
419			
420			
421			
422			
423			
424			
425			
426			
427			
428			
429			
430			
431			
432			
433			
434			
435			
436			
437			
438			
439			
440			
441			
442			
443			
444			
445			
446			
447			
448			
449			
450			
451			
452			
453			
454			
455			
456			
457			
458			
459			
460			
461			
462			
463			
464			
465			
466			
467			
468			
469			
470			
471			
472			
473			
474			
475			
476			
477			
478			
479			
480			
481			
482			
483			
484			
485			
486			
487			
488			
489			
490			
491			
492			
493			
494			
495			
496			
497			
498			
499			
500			


REV DATE BY DETAILS OF REVISION

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100


HEALCY CONSULTING
2811 Evans
C3 Dale Street
Milton
Windsor
ON L9B 3K8
Tel: 61

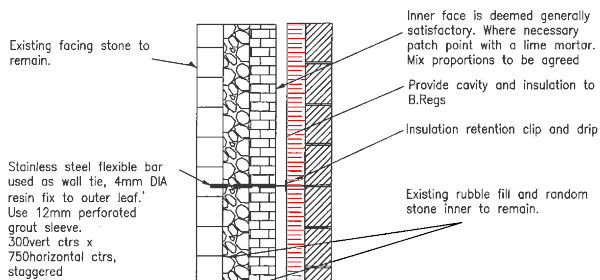

TYPICAL WALL TIE DETAIL - NEW TO EXISTING (1:20)



TYPICAL WALL TIE DETAIL - NEW TO EXISTING (1:5)

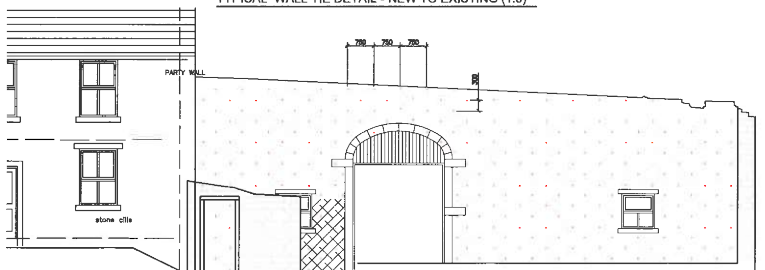

EXISTING INNER FACE OF FRONT ELEVATION
SHOWING ARRANGEMENT OF WALL TIES (1:50)



TYPICAL BEAM AND POT PC FLOOR LAYOUT SHOWING THE LOCATIONS (1:100)

Purpose made wall ties from stainless steel HELICAL welded to stainless steel fishtail tie.

PURPOSE MADE WALL TIE DETAIL (1:5)


NOT TO BE USED FOR CONSTRUCTION

PROJECT		BRANCH ROAD FARM	
BRANCH ROAD		LITTLEBOROUGH, ROCHDALE	
TITLE		PROPOSED FLOOR SLAB AND INTERNAL WALL DETAILS	
DRAWING NO.		HC-21314-(60)-03	
HEALEY CONSULTING		BRUNEL HOUSE 63 DASH STREET MILNOR ROCHDALE OL16 3BA Tel: 01708 343881 Fax: 01708 343881 email: office@healeyconsulting.co.uk copyright: Healey Consulting	
DRAWN BY		PMB	
DATE		20/05/21	
SCALE		1:100B/A3	
REVISION		B	



DO NOT SCALE FROM THIS DRAWING. USE GIVEN DIMENSIONS ONLY. ALL DIMENSIONS ARE TO BE CHECKED ON SITE BY THE CONTRACTOR. ANY DIMENSIONAL DISCREPANCIES TO BE REPORTED BACK TO HEALEY CONSULTING PRIOR TO PROCEEDING WITH CONSTRUCTION

A3 size drawing sheet (382mm x 267mm)

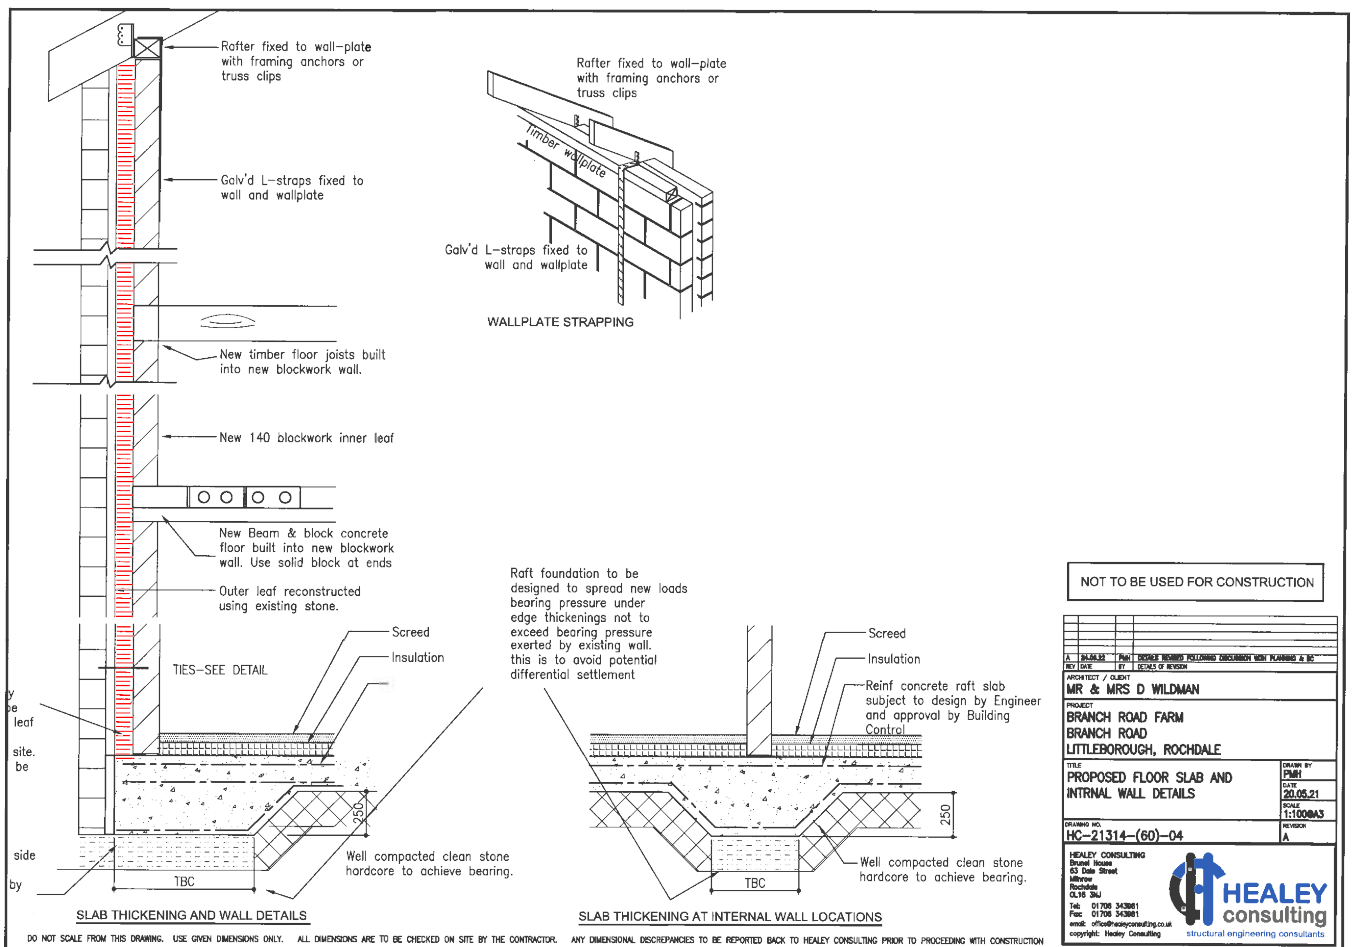

DO NOT SCALE FROM THIS DRAWING. USE GIVEN DIMENSIONS ONLY. ALL DIMENSIONS ARE TO BE CHECKED ON SITE BY THE CONTRACTOR. ANY DIMENSIONAL DISCREPANCIES TO BE REPORTED BACK TO HEALEY CONSULTING PRIOR TO PROCEEDING WITH CONSTRUCTION

A3 size drawing sheet (382mm x 267mm)