


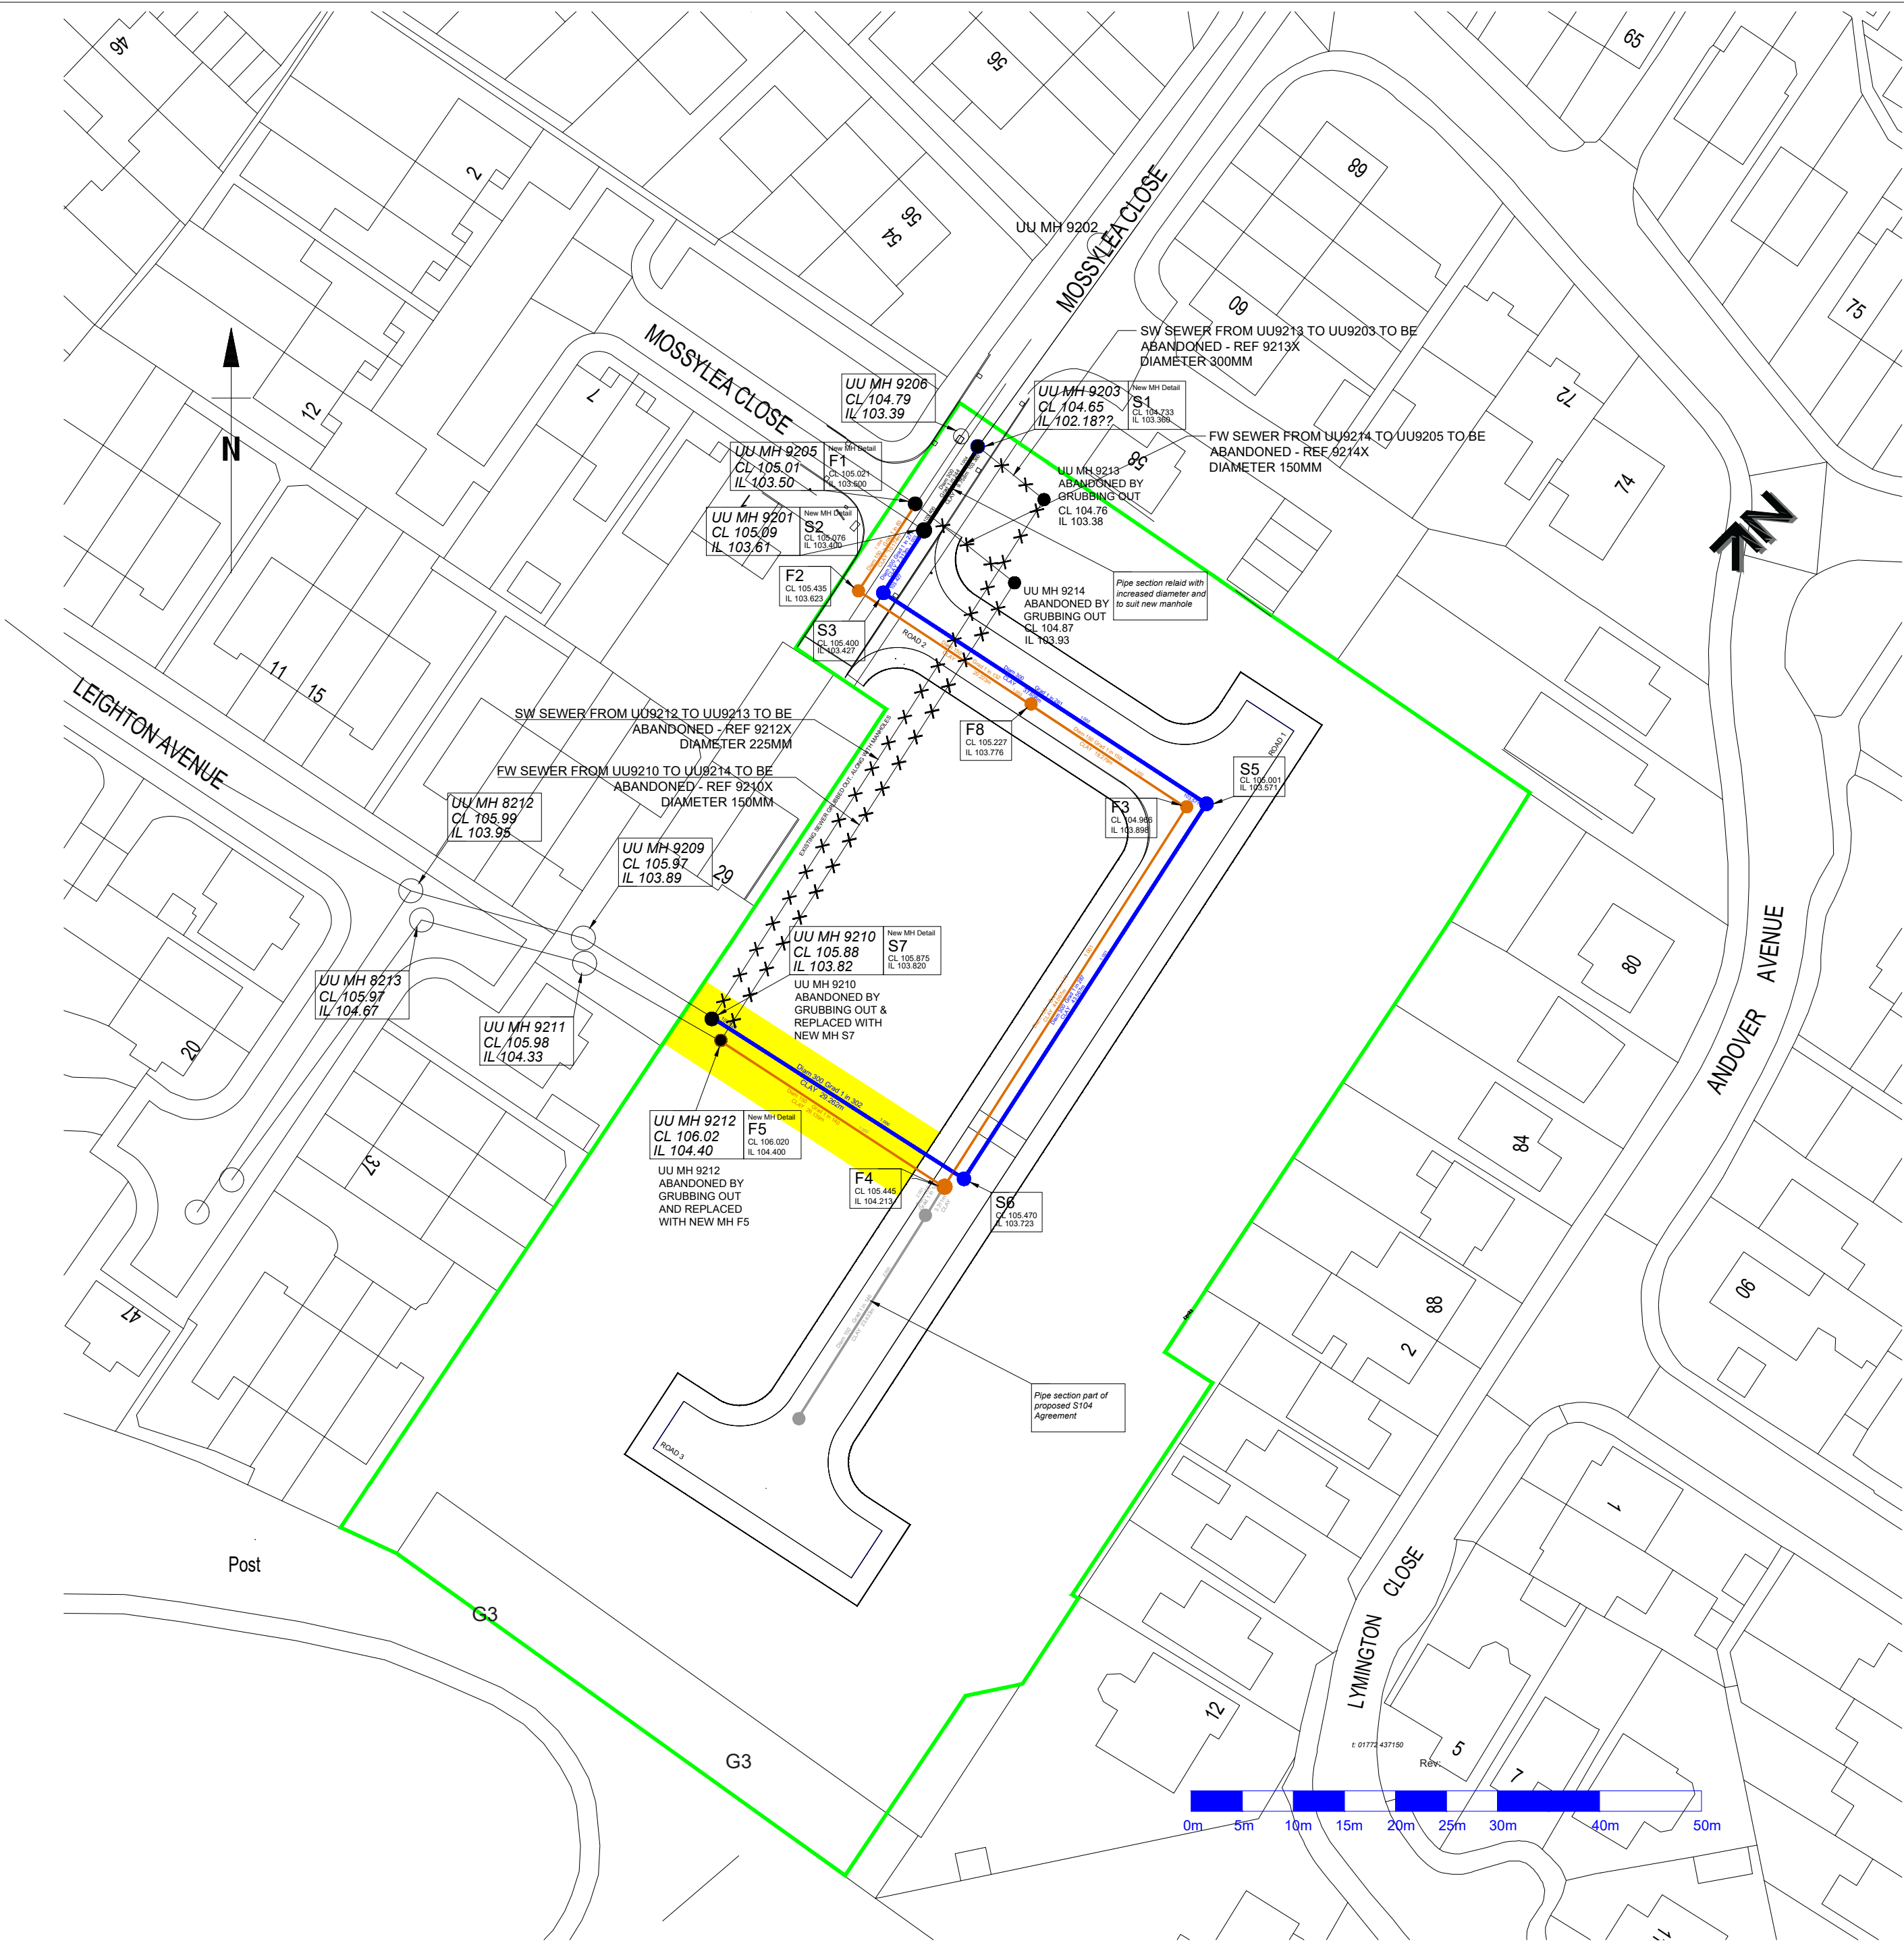

- Notes on Abandonment
- i) Any live connections are to be reconnected to the public sewer

ii) UU Inspector to be present for all diversion and abandonment works

iii) Existing sewers and manholes to be grubbed up

1. All S185 sewers and associated works are to comply fully with United Utilities Standard Details.

2. All highway works to be to adoptable standards and to cmply fully with Local Authority specification.

3. All private drainage works are to comply fully with part H of the Building Regulations.

4. All existing invert levels to be checked by the Contractor prior to commencement. All discrepancies to be notified to Tempus. All levels stated on the drawings are based on topographical survey information provided by others.

5. All materials shall comply with the Local Authority highways specification, British Standards, Building Regulations, Sewers for Adoption, project specification. All materials to be installed in accordance with manufacturer's recommendations.

6. The Contractor shall make himself aware of any contaminants within the ground which may affect the use of any materials and where appropriate, the specification, surround or protection of such materials shall be adjusted to suit.

7. The Contractor will be responsible for obtaining all necessary permits and opening notices prior to commencement of works. All works shall be inspected as required by the Building Control Officer, Local Authority, Relevant Water Authority and Warranty Provider.

B	15-01-24	AMENDED AS UU COMMENTS
A	05-01-24	NOTES ADDED TO DRAWING AS UU ASSESSMENT
REVISION	DATE	DESCRIPTION

CLIENT: LANCET HOMES	
PROJECT: MOSSY LEA CLOSE	
ADDRESS: MOSSY LEA CLOSE, MIDDLETON	
DRAWING TITLE: S185 PROPOSED ABANDONMENT PLAN	
SCALE: 1:500	DATE: JULY 2023
DRAWING NO: 9807_860	

Tempus Design and Build Limited

Office 1, Acorn Business Centre, Acorn Court,
Leigh, WN7 3DD
T 01942 676878