
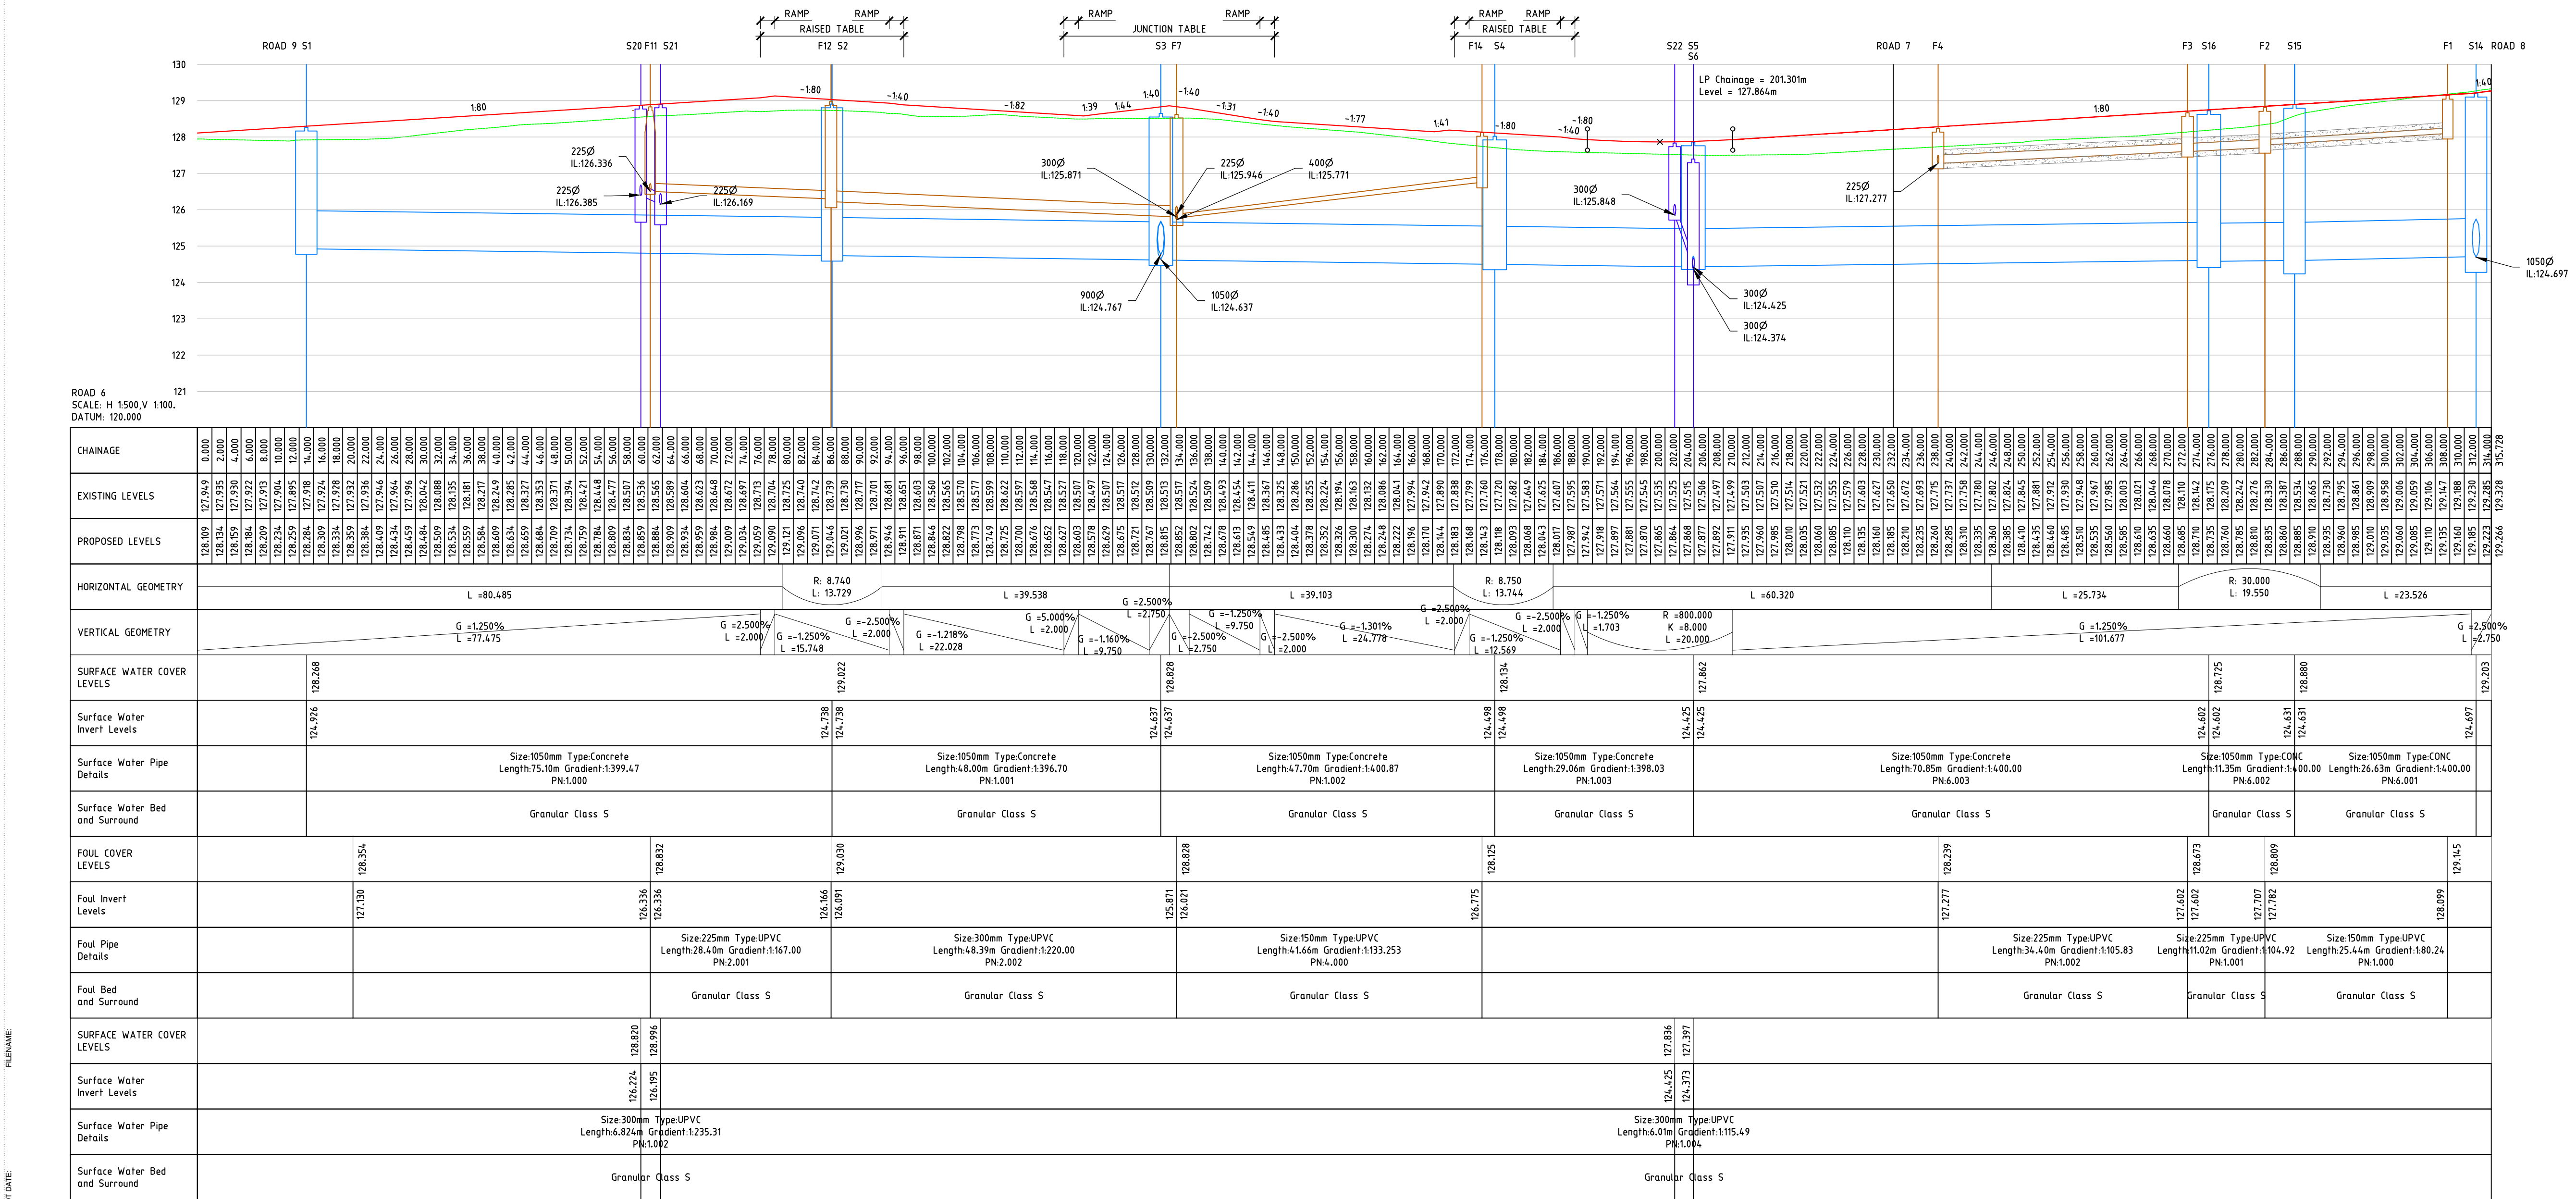
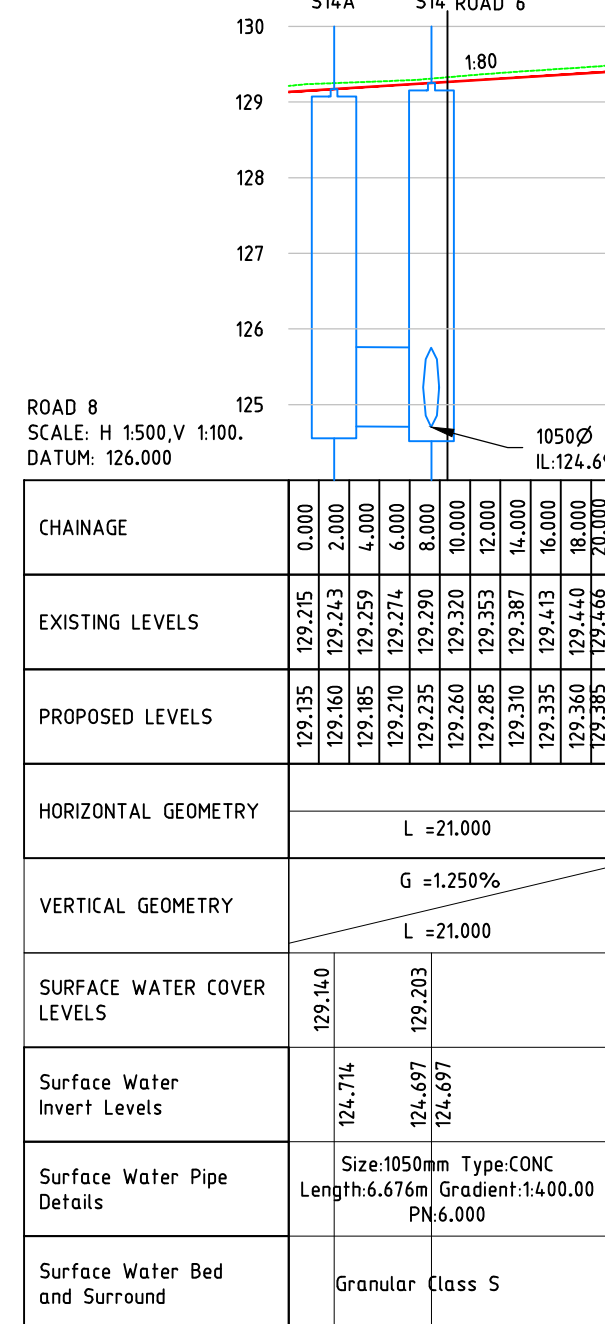


FILENAME: PLOT DATE:

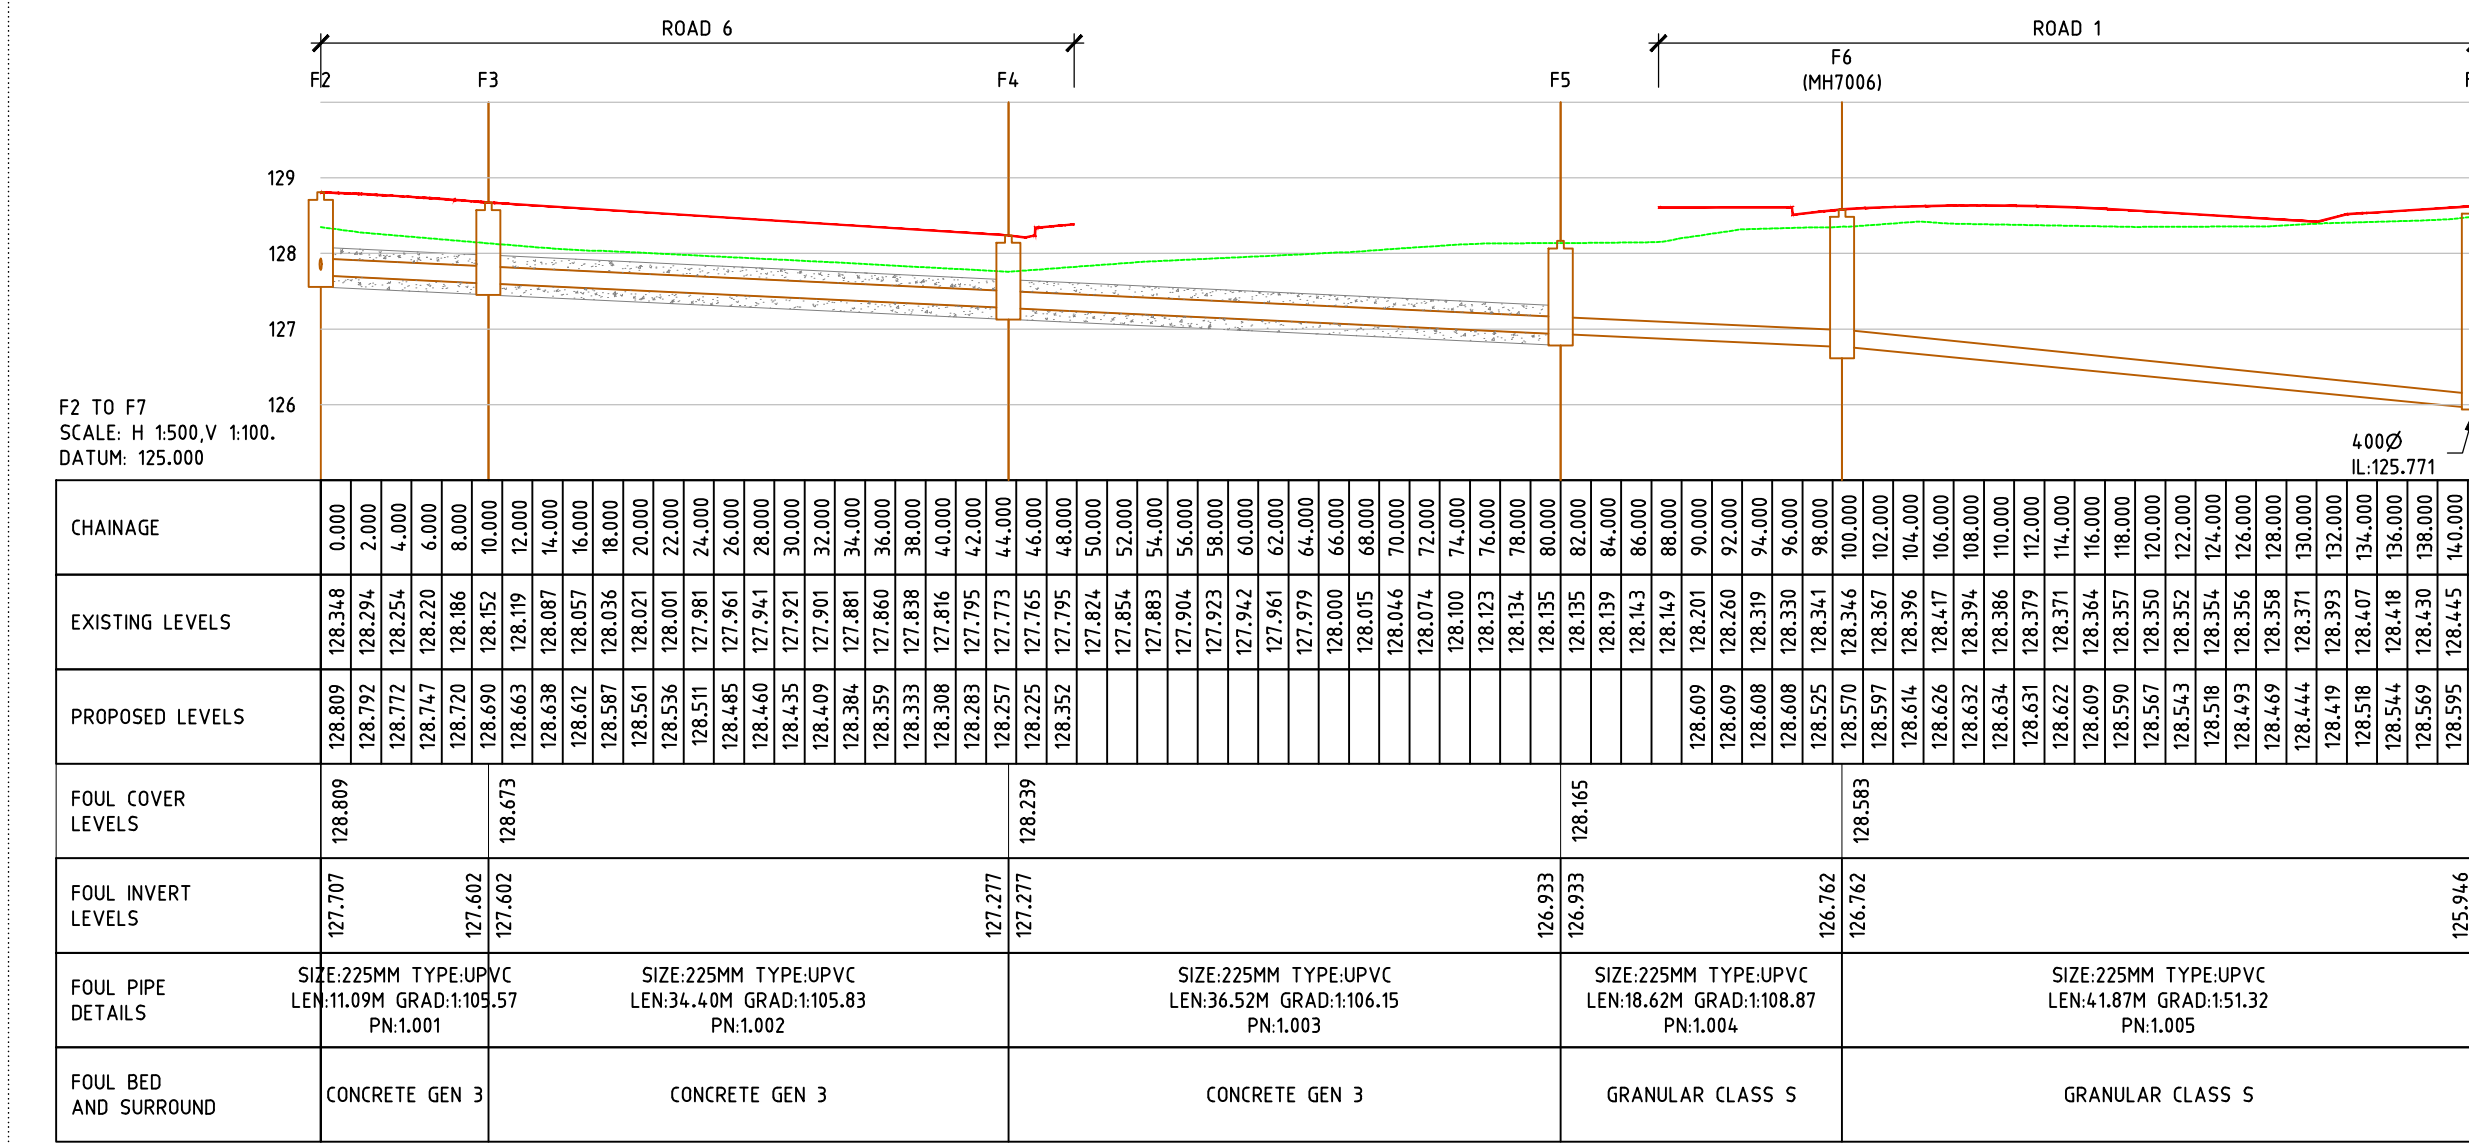

- NOTES:
- ALL SEWERS ARE DESIGNED IN ACCORDANCE WITH SEWERS FOR ADOPTION 6TH EDITION AND UNITED UTILITIES GUIDELINES AND STANDARD DETAILS.
 - ALL CO-ORDINATES AND LEVELS SHOWN ARE RELATIVE TO THE TOPOGRAPHIC SURVEY.
 - IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE ANY EXISTING GROUND AND INVERT LEVELS SHOWN ON THE DRAWING ARE CORRECT PRIOR TO THE COMMENCEMENT OF ANY WORKS. ANY DISCREPANCIES MUST BE MUST BE REPORTED IMMEDIATELY.
 - PRIOR TO THE COMMENCEMENT OF ANY ON SITE WORKS THE CONTRACTOR MUST CONTACT THE STATUTORY UNDERTAKER AND BE IN POSSESSION OF THE LATEST DRAWINGS SHOWING THEIR APPARATUS.
 - IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ALLOW FOR THE SUPERVISION OF THE CONSTRUCTION WORKS BY UNITED UTILITIES AND/OR ROCHDALE BOROUGH COUNCIL. THE CONTRACTOR WILL NOTIFY THE SUPERVISING OFFICER GIVING NOTICE WHICH WILL BE IN ACCORDANCE WITH THE AUTHORITIES REQUIREMENTS.
 - THE PROPOSED SEWERS WILL BE REINFORCED PVC-U PIPES COMPLYING WITH BS EN 12201 UP TO AND INCLUDING 300MM. PVC-U PIPES TO BE IN ACCORDANCE WITH BS EN 4660-200 & BS EN 1401-1:1916:2002.
 - ANY PCC PIPE WORK WILL BE IN ACCORDANCE WITH BS EN 1917:2002.
 - ALL MANHOLES AND CHAMBERS SHALL BE IN ACCORDANCE WITH BS EN 1917:2002.
 - SEWERS WITH COVER TO SOFFIT GREATER THAN 1.2m IN ROADS AND 0.9m IN FIELDS SHALL HAVE CLASS 5 BED AND SURROUND ALL IN ACCORDANCE WITH UNITED UTILITIES STANDARD DETAIL STND/05/001.
 - PRIVATE DRAINAGE CONNECTIONS TO THE SEWER WILL BE 150MM DIAMETER AND LAID TO THE SPECIFIED INVERT.
 - THE CONNECTION TO THE ADAPTABLE SEWER SHALL BE MANUFACTURED JUNCTION PIPES A SADDLE CONNECTION IS NOT PERMITTED UNLESS IT IS CLEARLY SPECIFIED.
 - ANY SEWER FOR ADOPTION WITH A COVER OF LESS THAN 1.2M TO PIPE SOFFIT IN ROADS OR 0.9m TO PIPE SOFFIT IN FIELDS WILL HAVE A MINIMUM 150mm GEN 3 CONCRETE BED AND SURROUND WITH FLEXIBILITY MAINTAINED WITH FLEXCELL EXPANSION JOINT FILLER OR SIMILAR APPROVED AT EACH PIPE JOINT.
 - CONCRETE MIX FOR MANHOLE SURROUNDS TO BE GEN3.
 - INSTALL GULLIES, MANHOLES, GRATES, COVERS AND ALL ANCILLARY ITEMS TO MANUFACTURERS SPECIFICATION.
 - ALL MANHOLES INCLUDING 150MM DIAMETER TO BE KITEMARKED AND COMPLY TO BS EN 1917:2002.
 - ALL MANHOLES TO BE INSTALLED IN ACCORDANCE WITH UNITED UTILITIES DETAILS AND HYDRO INTERNATIONAL SPECIFICATION.
 - CONNECTIONS TO THE EXISTING SEWER WILL BE IN ACCORDANCE WITH SECTION 104 APPROVAL GRANTED BY UNITED UTILITIES.
 - SEWERS/MANHOLES TO BE ABANDONED TO BE EITHER GROUTED UP OR GRUBBED OUT. UU INSPECTOR TO SIGN OFF WORKS ON COMPLETION.
 - TOTAL SURFACE WATER DISCHARGE RATE QUOTED IS 30 LITRES PER SECOND. UNITED UTILITIES PRE DEVELOPMENT ENDURY RESPONSE TO CONFIRM ALLOWABLE DISCHARGE RATE.

004 19.06.23

Updated to revised channel levels

M.A. R.A.

003 09.12.22

Updated in line with drainage updates

H.S. R.A.

002 24.10.22

Updated to match drainage comments

H.S. R.A.

001 10.08.22

ISSUED FOR CONSTRUCTION

H.S. R.A.

P04 21.02.22

Updated in line with latest drainage changes

J.C. R.A.

P03 09.12.20

Updated to suit latest site layout

D.A. R.A.

P02 29.07.20

PRELIMINARY - Updated to suit client's comments

D.A. R.A.

P01 30.04.20

PRELIMINARY - Issued for Information

J.C. R.A.

Rev

Date

Description

By

CHK

EDGE

CONSULTING ENGINEERS

www.edgece.com

Manchester, UK

3rd Floor, Cornovan Court,

12 Blackfriars Street,

Manchester, M3 5BQ,

United Kingdom

T: +44 (0) 161 834 1938

E: manchester@edgece.com

The concepts + information contained in this document are the copyright of EDGE Consulting Engineers. Use or copying of this document in whole or in part without the written permission of EDGE Consulting Engineers constitutes an infringement of copyright.

DO NOT SCALE DRAWINGS. IF IN DOUBT, ASK!

Project Name

NIXON STREET

Project No.

20066

Drawing No.

C2103

Revision

C04

Client

HIVE HOMES

Designed

Drawn

Checked

Scale @ A1

R.A.

J.A.

R.A.

1:500

Drawing Title

LONGITUDINAL SECTIONS

SHEET 2