




VITAL ENERGI UTILITIES LIMITED

TECHNICAL SUBMISSION TS02 Solar PV Modules Chamber House - Rochdale

Document Reference: 50716-VE-SW-XX-TS-X-6202

Issued By	Max Allen	Senior Energy Modeller	Date	18/11/2022
Checked By	Luke Dwyer	Pre-Construction Manager	Date	18/11/2022
Approved By	David Oatt	Operations Manager	Date	18/11/2022

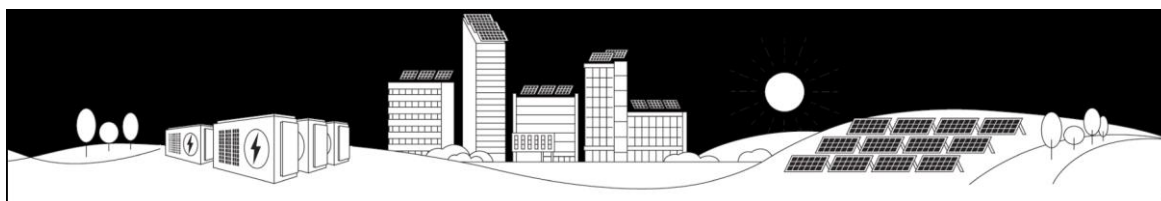

TS02 – Solar PV Modules

50716-VE-SW-XX-TS-X-6202



Revision History						
Revision	Date	Page(s) Affected	Description	Produced By	Checked By	Approved By
P01	18-11-2022	all	Solar PV Modules	Max Allen	Luke Dwyer	David Oatt

CONTENTS

1	INTRODUCTION	3
2	APPENDIX	3

1 INTRODUCTION

The site address for delivery is:

Chamber House

Rochdale Road East

Heywood

Rochdale

OL10 1RL

This Technical submission covers the Solar panels selected for the scheme.

- 7,340 PANELS
- WATTAGE 545 w
- MODEL JA Solar JAM72D30-545/MB Bi Facial

2 APPENDIX

- JA Solar technical specification sheet

DEEP BLUE 3.0

Mono

550W MBB Bifacial Mono PERC
Half-cell Double Glass Module
JAM72D30 525-550/MB Series

Introduction

Assembled with 11BB bifacial PERCUM cells and half-cell configuration, these double glass modules have the capability of converting the incident light from the rear side together with the front side into electricity, providing higher output power, lower temperature coefficient, less shading loss, as well as enhanced tolerance for mechanical loading.



Higher output power



More reliable, more stable
power generation



Less shading effect




Lower temperature coefficient

Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

0.45% Annual Degradation
Over 30 years

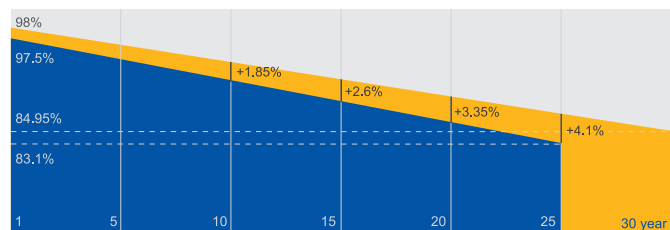

■ Bifacial double glass module linear power warranty


■ Standard module linear power warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



MECHANICAL DIAGRAMS

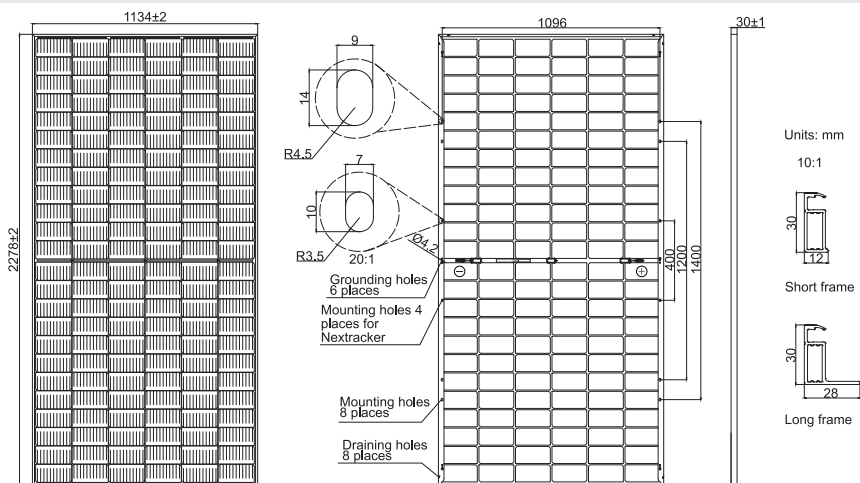

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	31.8kg
Dimensions	2278±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	MC4-EVO2/ QC 4.10-351
Cable Length (Including Connector)	Portrait:200mm(+)/300mm(-); Landscape:1300mm(+)/1300mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet 720pcs/40HQ Container

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D30 -525/MB	JAM72D30 -530/MB	JAM72D30 -535/MB	JAM72D30 -540/MB	JAM72D30 -545/MB	JAM72D30 -550/MB
Rated Maximum Power(P _{max}) [W]	525	530	535	540	545	550
Open Circuit Voltage(V _{oc}) [V]	49.15	49.30	49.45	49.60	49.75	49.90
Maximum Power Voltage(V _{mp}) [V]	41.15	41.31	41.47	41.64	41.80	41.96
Short Circuit Current(I _{sc}) [A]	13.65	13.72	13.79	13.86	13.93	14.00
Maximum Power Current(I _{mp}) [A]	12.76	12.83	12.90	12.97	13.04	13.11
Module Efficiency [%]	20.3	20.5	20.7	20.9	21.1	21.3
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO


TYPE	JAM72D30 -525/MB	JAM72D30 -530/MB	JAM72D30 -535/MB	JAM72D30 -540/MB	JAM72D30 -545/MB	JAM72D30 -550/MB	Maximum System Voltage	1500V DC
Rated Max Power(Pmax) [W]	562	567	572	578	583	589	Operating Temperature	-40°C~+85°C
Open Circuit Voltage(Voc) [V]	49.54	49.67	49.80	49.93	50.03	50.21	Maximum Series Fuse Rating	30A
Max Power Voltage(Vmp) [V]	41.14	41.31	41.47	41.65	41.78	41.95	Maximum Static Load,Front* Maximum Static Load,Back*	5400Pa(112 lb/ft²) 2400Pa(50 lb/ft²)
Short Circuit Current(Isc) [A]	14.61	14.68	14.76	14.83	14.91	14.98	NOCT	45±2°C
Max Power Current(Imp) [A]	13.65	13.73	13.80	13.88	13.95	14.03	Bifaciality**	70%±10%
Irradiation Ratio(rear/front)	10%						Fire Performance	UL Type 29
*For Mono-Francis installations: Maximum Static Load, Front is 1000Pa(white) Maximum Static Load, Back is 1000Pa								

*For NexTracker installations, Maximum Static Load, Front is 1800Pa while Maximum Static Load, Back is 1800Pa.


**Bifaciality=P_{max, rear}/Rated P_{max, front}

CHARACTERISTICS

Current-Voltage Curve JAM72D30-540/MB



Power-Voltage Curve JAM72D30-540/MB



Current-Voltage Curve JAM72D30-540/MB

