


Product Dimensions

| CAT NO.    | LENGTH (mm) | DEPTH (mm) | HEIGHT (mm) |
|------------|-------------|------------|-------------|
| LFS6B1**   | 125         | 70         | 85          |
| LFS12B1**  | 135         | 80         | 105         |
| LFS18B1**  | 135         | 80         | 105         |
| LFS30B1**  | 260         | 110        | 185         |
| LFSP6B1**  | 125         | 130        | 135         |
| LFSP12B1** | 155         | 140        | 155         |
| LFSP18B1** | 155         | 140        | 155         |
| LFSP30B1** | 260         | 160        | 230         |

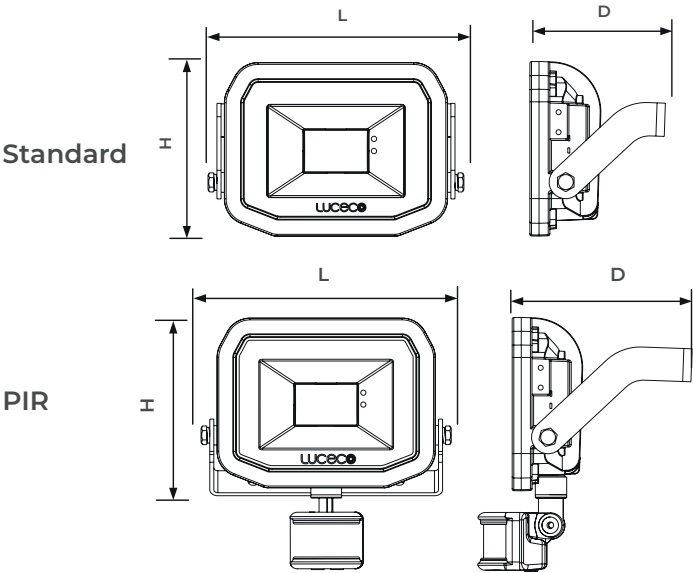

| CAT NO.    | WEIGHT (kg) | CRI | FREQUENCY (Hz) | IK RATING | TEMP RANGE (°C) | AMBIENT TEMP RATED LIFE (°C) | L/B RATED LIFE |
|------------|-------------|-----|----------------|-----------|-----------------|------------------------------|----------------|
| LFS6B1**   | 0.45        | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFS12B1**  | 0.635       | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFS18B1**  | 0.585       | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFS30B1**  | 2.0         | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFSP6B1**  | 0.5         | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFSP12B1** | 0.75        | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFSP18B1** | 0.635       | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |
| LFSP30B1** | 2.06        | >80 | 50-60          | IK04      | -20 to +25      | 25                           | L70 / B50      |

| STANDARD  | DESCRIPTION                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------------------|
| 60598-1   | Luminaires - General requirements                                                                                   |
| 60598-2-5 | Luminaires - Floodlights                                                                                            |
| 61000-3-2 | Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions                             |
| 61000-3-3 | Lamp controlgear - Part 1: General and safety requirements                                                          |
| 61547     | Equipment for general lighting purposes - EMC immunity requirements                                                 |
| 55015     | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment |

LUCECO

This luminaire contains built-in LED lamps.

A++

A+

A

B

C

D

E

LED

The lamps cannot be changed in the luminaire.

874/2012