


08514 Scoping axr

SCOUT MOOR II

FIGURE 11.9

Screening ZTV to Blade Tip

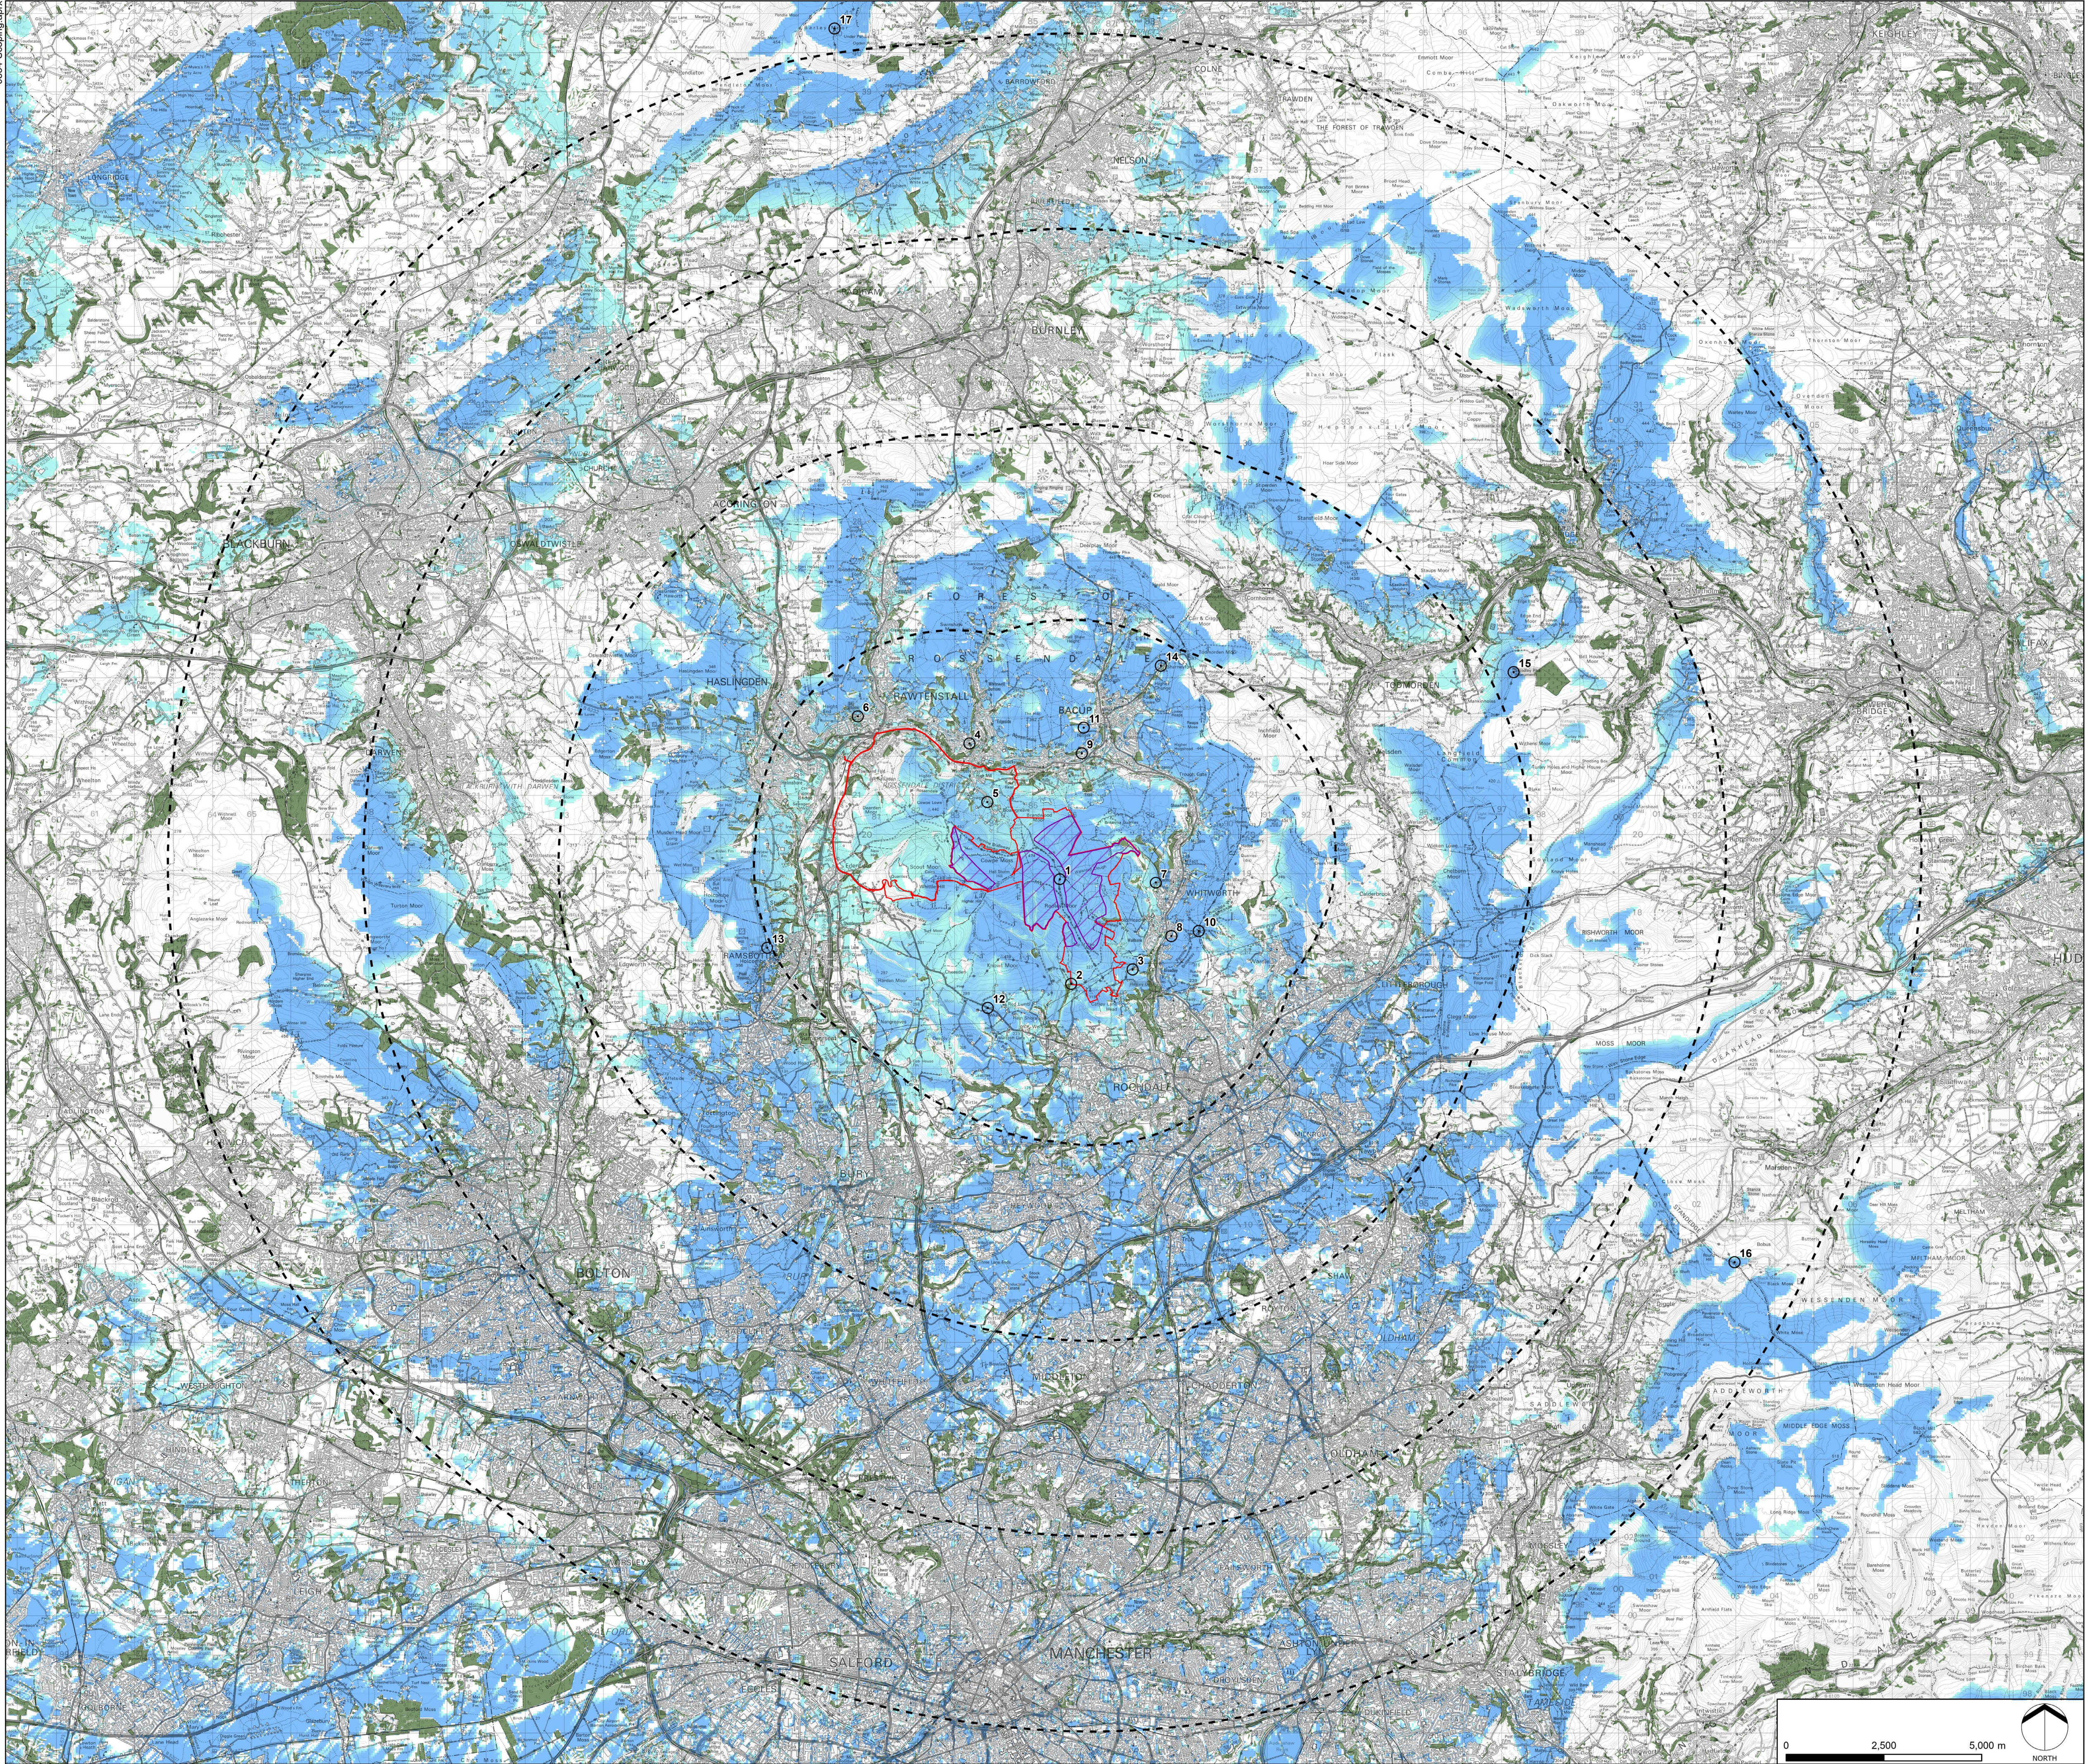

KEY

Assessment Boundary

Turbine Development Zones

Distance Radii from Development Areas (5, 10, 15, 20km)

Proposed Viewpoints

Woodland (modelled at 10m)

Zone of Theoretical Visibility (180m to blade tip)

More theoretical visibility

Less theoretical visibility

FIGURE DATA:
This figure has been based on the following data:

Layout file: D005-obvs-BT-T5-5km.shp; D005-obvs-BT-T50-45km.shp
Terrain data: T5-DTM.asc; T50-DTM-45km.asc
Viewer's eye height: 2m above ground level
Calculation grid size: 5m (to 5km from development areas) / 50m (beyond)

NOTES:
This drawing is based upon computer generated Zone of Theoretical Visibility (ZTV) studies produced using the Viewshed routine in the Visibility Analysis plugin for QGIS.

The areas shown are the maximum theoretical visibility, taking into account topography, principal woodlands and buildings.

A digital surface model (DSM) has been derived from OS Terrain 5/50 height data with the locations of woodland and buildings taken from the OS Open Map Local dataset. Buildings have been modelled with an assumed height of 7.5m and woodland an assumed height of 10m, representing a conservative estimate of average heights within the study area.

The model does not take into account some localised features such as small copses, hedgerows or individual trees and therefore still gives an exaggerated impression of the extent of visibility. The actual extent of visibility on the ground will be less than that suggested by this plan.

The ZTV includes an adjustment that allows for Earth's curvature and light refraction. It is based on a DTM and has a 5m² (to 5km from development areas) / 50m² resolution.

Projected Coordinate System: British National Grid
Client: Cubico UK Development (VWind 1) Limited

DATE	BY	PAPER	SCALE	QA	REV
DEC 2024	MP	A1	1:80,000	MB	-