

TREE PLANTING PLAN—70 Bolton Road, Rochdale, OL11 4NX

- All trees will be planted during the tree planting season (November to March) after the proposed tree works have been undertaken on the site.
- All trees to be planted will be between 1-1.5m tall dependant on species and specimens available. A tall feather or light standard type will be used.
- The tree used will be pot grown or root-balled specimens.
- Planting will be undertaken by someone of suitable experience and/or qualifications.
- All tree will have suitable bracing/stakes installed to provide support and stability while the trees acclimatise to their new environment. An example of how this will be achieved is shown here in figure 1. This diagram also shows details of how the trees will be planted.
- Trees will have a layer of mulch applied to the area around an above their rootball to help protect from weather extremes.
- Newly planted trees will be assessed during periods of drought or weather extremes for 24 months after their installation.
- Any trees that die or decline to a point where they can no longer re-tained within 5 years of being planted will be replaced with similar specimens.
- Tree species are to be as shown in the key opposite



Site Plan 1:500


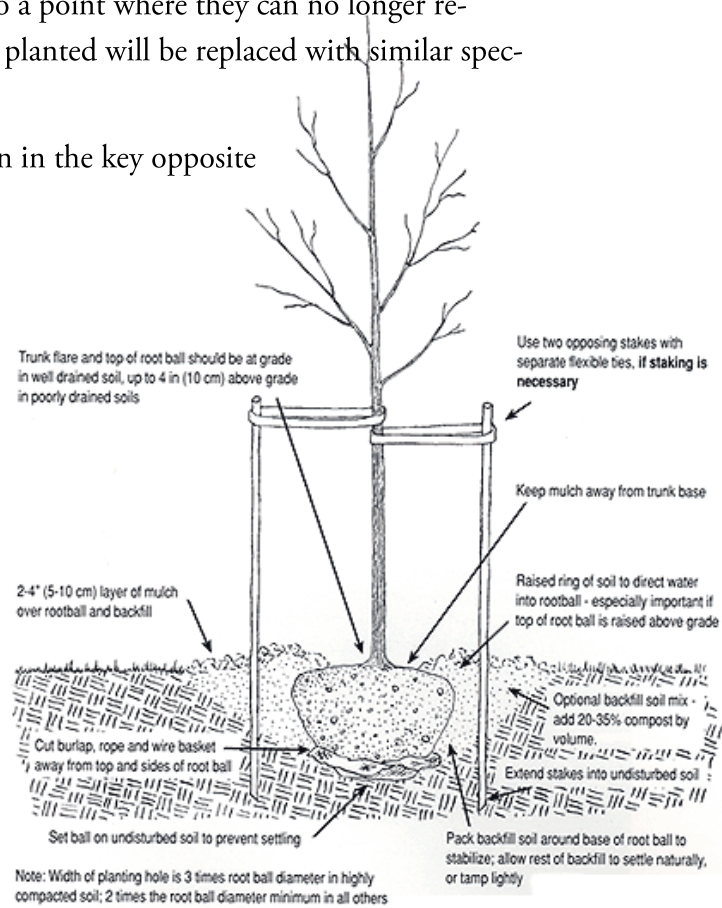


Figure 1—Tree planting method



Location Plan 1:1250



Denotes existing trees to be retained



Denotes existing tree to be removed



Denotes proposed replacement tree planting

Tree No:	Common Name:	Latin Name:
1.	Rowan/Mountain Ash	Sorbus acuparia
2.	Field maple	Acer campestre
3.	Hornbeam	Carpinus betulus
4.	Field maple	Acer campestre

Site Name: 70 Bolton Road, OL11 4NX
Drawing Title: 70 Bolton Road —Tree planting plan
Date 13/09/23

Forest & Tree Consulting
Ltd
T: 01282 219311
M: 07810 650084
info@forestandtree.co.uk

