

JOB NO	CUSTOMER	MARKED	LINE NO.	COMPLETION DATE
62378	Meadow Care Lts	Tracy Mills	10	

Marking

Fire Scheme/Rating	FD60S - Q Mark - Chilt/A02067 - Strebord FD60
Doorset Plug Type	FD60 - Blue Outer / Silver Inner
Vision Panel Plug Type	FD60 - Blue Outer / Orange Inner
Data Pin	Door Data System (DDS) Pin

Finish

Frame - Internal	Clear Lacquer (TT016)
Frame - External	Clear Lacquer (TT016)
Door - Internal	Veneered
Door - External	Veneered

Frame Detail

Frame Depth	100
Frame Section	32mm Frame
Frame Material	European Oak
Frame Stops	Frame Stops 12x32
Floor Clearance	6mm Floor Clearance
Hinges	Stainless Steel Butt Hinges (4)
Intumescent (Location)	Brown 15x4 Finesse + 15x4 Flat (Left,Right,Top)

Door

Lippings	8mm KSK - C4
Door Type	54mm Strebord
Door Design	Vision Panel 27 (VARx1450)
Facing Type	European Oak C/C Vertical

Vision Panel

Vision Panel	11.4mm PYROGUARD EW60 - 2(B)2 - 35dB
Beading	* American Oak Lacquered FD60 Aperture beads
Gasket	Thermabead BLACK 25x4mm & Thermaline 60S
CNC Detail	Vision/panel cutout: W:510 H:1450
Glass WxH	500x1440


Ironmongery

Lock	DIN Standard Sashlock Radius SSS
Cylinder	1* UAP ZL Thumbturn Anti-Bump SAA
Handle	Return to Door Lever on Sprung Rose - SSS
Handle	Euro Profile Escutcheon - SSS
Closer	TS5204 Overhead (SA) - Silver
Door Furniture	Fire Door Keep Locked - SSS - 2 sides
Dropseal	DropSeal NOR810

Info: FD60, 54mm Door - Requires Leading Edge

REFERENCE Doorset

QUANTITY	1
FRAME WxH	980 X 2130 X 100
OPENS	OUT
LEAF WxH	11 = 910 x 2089 - RH Hung

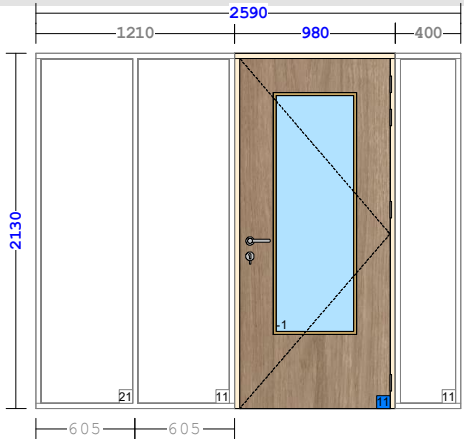

Special Instructions


No notes

Drawings are not to scale.

I confirm that all specification details are correct in every detail, and that manufacture can commence on this basis. I have initialled any amendments made. I accept the terms and conditions.
In accordance with BS 8214 on doorsets that require smoke performance without thresholds or automatic dropseals, the gap between the floor covering and the bottom of the door must not exceed 3mm. To remain within fire door compliance the maximum bottom edge gap must not exceed 10mm.

Sign	Date
Print	





WHITE | YELLOW | OFFICE

Page 2 of 3

Marking

Finish

Door - External --

Integration Costs	Supplied Loose / Not Coupled
-------------------	------------------------------

Glass WxH 322x2052

LEAF WxH



Drawings are not to scale.

In accordance with BS 8214 on doorsets that require smoke performance without thresholds or automatic dropseals, the gap between the floor covering and the bottom of the door must not exceed 3mm. To remain within fire door compliance the maximum bottom edge gap must not exceed 10mm.

Sign	Date
Print	



THE UK SPECIALIST
DOORSET COMPANY

Doorset Production Sheet

WHITE | YELLOW | OFFICE

Internal Timber Screen

Page 3 of 3

JOB NO	CUSTOMER	MARKED	LINE NO.	COMPLETION DATE
62378	Meadow Care Lts	Tracy Mills	30	

Marking

Fire Scheme/Rating FD60/00 - Certifire - CF5304

Finish

Frame - Internal Clear Lacquer (TT016)

Frame - External Clear Lacquer (TT016)

Door - Internal --

Door - External --

Frame Detail

Frame Depth 100

Frame Section Internal Timber Screen 32mm Frame

Frame Material European Oak

Shadow Groove 3x3 Shadow Groove (Left,Right)

Integration Costs Flexible Black Seal - 25x2.5mm with S/A

Factory Glazed Temporary Glazed

Integration Costs Supplied Loose / Not Coupled

Vision Panel

Vision Panel 11.4mm PYROGUARD EW60 - 2(B)2 - 35dB

Beading Euro Oak 23 X 26 Screen Bead

Gasket Foam Glazing Tape - Black - 20x5mm

Glass WxH 543x2052


REFERENCE Screen 2

QUANTITY 1

FRAME WxH 1210 X 2130 X 100

OPENS n/a - Screen

LEAF WxH

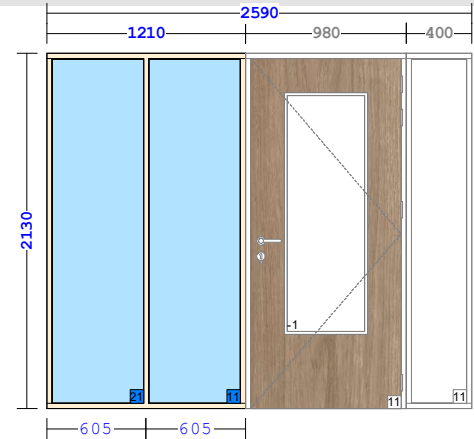

Special Instructions

No notes

Drawings are not to scale.

I confirm that all specification details are correct in every detail, and that manufacture can commence on this basis. I have initialled any amendments made. I accept the terms and conditions.

In accordance with BS 8214 on doorsets that require smoke performance without thresholds or automatic dropseals, the gap between the floor covering and the bottom of the door must not exceed 3mm. To remain within fire door compliance the maximum bottom edge gap must not exceed 10mm.

Sign	Date
Print	