

# **Site Tree Appraisal**

## ***5 Hillkirk Drive, Shawclough, Rochdale OL12 7HD***

**"BS 5837 2012: Trees in Relation to Design, Demolition and Construction – Recommendations"**



### **ROWBOTTOM'S TREE SERVICES LTD**

#### ***INDEPENDENT ARBORICULTURAL CONSULTANCY***

Date: 11<sup>th</sup> November 2024

Ref: RTS/11112024

Revision: 001

Head Office: Cheddleton Lodge, West Road, Prestwich, Manchester, M25 3FB.

T: 0161 773 2788

E: [bill@rowbottoms-tree-services.co.uk](mailto:bill@rowbottoms-tree-services.co.uk)

Web: [www.rowbottoms.co.uk](http://www.rowbottoms.co.uk)

Company Reg No: 4862189

VAT No 184 3636 88

**5 Hillkirk Drive, Shawclough, Rochdale OL12 7HD:**

The following is a pre-development survey and appraisal of trees on and adjacent to the above site.

Its primary purpose being to categorize the trees according to BS 5837:2012 Trees in Relation to Design, Demolition and Construction – Recommendations, so that the Local Planning Authority may review the existing trees in association with the proposed development.

The report and associated plans have been produced for the sole purpose: - to accompany the above planning submission.

## **Table of Contents**

|                                        | Page      |
|----------------------------------------|-----------|
| <b>1. INTRODUCTION</b>                 | <b>4</b>  |
| <b>2. SITE SURVEY AND OBSERVATIONS</b> | <b>5</b>  |
| <b>3. APPRAISAL</b>                    | <b>6</b>  |
| <b>4. CONCLUSIONS</b>                  | <b>7</b>  |
| <b>5. RECOMMENDATIONS</b>              | <b>8</b>  |
| <b>6. BIBLIOGRAPHY</b>                 | <b>10</b> |

## **Appendices**

|                                                                |           |
|----------------------------------------------------------------|-----------|
| <b>1. Qualifications and Experience</b>                        | <b>11</b> |
| <b>2. Trees and Construction Sites – General Issues</b>        | <b>12</b> |
| <b>3. Tree Data</b>                                            | <b>13</b> |
| <b>4. Explanatory Notes</b>                                    | <b>14</b> |
| <b>5. Protective Fencing Specifications</b>                    | <b>15</b> |
| <b>6. Tree Schedule</b>                                        | <b>17</b> |
| <b>7. Tree Quality Assessment and Categorization Criterion</b> | <b>20</b> |
| <b>8. Site Photographs</b>                                     | <b>22</b> |

## **1. Introduction:**

**1.1** This tree survey has been commissioned by Mr Arien.

**1.2** I have undertaken this tree survey following the guidance and recommendations of; 'BS 5837: 2012 Trees in Relation to Design, Demolition and Construction-Recommendations'.

**1.3 Instruction:** I am instructed by Mr Arien to inspect the significant trees on and adjacent to the site that may be affected by the proposed property extension and to provide an arboricultural report to accompany a planning application. The relevant tree information that has been noted and prepared to accompany the planning application is.

- A schedule of the significant trees on and adjacent to the site, to include basic data and an assessment of their condition, (see appendix 3).
- An appraisal of the impact that the proposed development may have on the trees and as a result, the visual amenity of the locale.
- An initial arboricultural method statement (AMS) setting out basic protective requirements and management needs of the trees to be retained and tree works required to facilitate the proposed development.

**1.4 Documents and information provided:** Mr Arien provided me with the following documents:

- *James Campbell Associates Ltd Existing Plan Details 24.3430.1*
- *James Campbell Associates Ltd Existing Elevations 24.3430.2*
- *James Campbell Associates Ltd Proposed Plans and Elevations 24.3430.3*

**1.5 Qualification and experience:** I have based this report on my site observations and the provided information, and I have come to conclusions in light of my experience. I have experience and qualifications in arboriculture and list the details in appendix 1.

**1.6 Report scope and limitations:** Construction work often exerts undesirable pressures on existing trees, as do changes in their environment following construction (see appendix 2). This report has been prepared to analyse the impact that the proposed development may have to the existing site trees. It further advises on protective requirements and appropriate management needs of the trees, should they be retained on the site. The primary purpose of the report is to provide sufficient tree information to allow the Local Planning Authority to review any tree issues associated with the development proposal.

**1.6.1** It should be noted that this report takes no account of indirect structural damage that may arise to buildings as a result of tree induced soil volume changes. Such damage can occur to buildings built on shrinkable clay sub-soils and will be more prevalent during prolonged drought conditions. Also, buildings built on shrinkable soils following tree removal can suffer heave affects as the soil rehydrates. These issues should be addressed during the design of the proposed property extension (*National House Building Council-NHBC 2011-part 4.2 building near trees*). Also, this report does not take into account damage to drains and underground services that may be due to tree root activity. If damaged, drains can allow roots to penetrate them. If, however, they are in good repair tree roots have little capacity to access them. A drainage expert could give more advice.

## 2. Site visit and observations:

**2.1 Site visit:** I carried out an unaccompanied site visit on 11<sup>th</sup> November 2024. All my observations were from ground level without detailed investigations and all dimensions were measured using a diameter tape and laser measure, heights were measured using a clinometer. If access was restricted measurements were estimated. The weather at the time of inspection was dry and clear with good visibility.

**2.2 Brief site description:** 5 Hillkirk Drive is a relatively newly built property in the Shawclough area of Rochdale. It is a sizable detached two-storey house with large gardens that surround the south, east and north sides of the house. The gardens are predominantly grassed and general weed scrub. There are numerous mature trees in the gardens that pre-date the house construction.

### 2.2.1 Site Aspect and Topography:

- The house front is south facing.
- The site is broadly level with no significantly raised features, other than a small banking adjacent to the rear north boundary.

### 2.2.2 Preliminary Geological Information:

|               |                  |
|---------------|------------------|
| Soil Texture: | Loamy Clay       |
| Soil pH:      | Acid             |
| Drainage:     | Impeded Drainage |
| Fertility:    | Low              |
| Carbon:       | Medium           |
| Drains to:    | Stream Network   |

(Cranfield Soil and Agrifood Institute; Land Information Systems, 2024)

**2.2.3: Tree Protection Status:** Most of the trees in the gardens are protected by a Tree Preservation Order (TPO). The Rochdale Council TPO; Judith Street, Shawclough, Rochdale TPO 139 1996. The TPO is an Area Order, the 5 Hillkirk Drive trees are those in A1.

**2.3 Identification and location of the trees:** The locations of the significant trees are illustrated on the Tree Constraints Plan *RTS/11112024/TCP 001* included with this report. There are numerous other trees on the site, further east of trees T4, T6 and T7, however these are sufficiently distant from the proposed building work and are, therefore, not anticipated to be affected by it. All the relevant information on the trees is contained within this report and the provided documents listed in 1.4 above.

**2.4 Tree observations:** The trees were not climbed; I visually inspected the significant trees from ground level in accordance with visual tree assessment (VTA) techniques and recorded the information on the schedule included at appendix 6. The assessment has been to a level one of the TRAQ assessment criteria.

### 3 APPRAISAL:

- 3.1 Relevant references:** ‘BS 5837:2012 Trees in Relation to Design, Demolition and Construction-Recommendations’.
- 3.2 Arboricultural Impact Assessment (AIA):** The proposal is to involve a single storey extension to the rear (north) elevation of the property. At this stage I have not been made aware of the need to alter or install new underground drains or other utility services.
- 3.3** None of the site trees will require removal as a result of their direct conflict with the extension proposal. A limited amount of tree removals, however, are recommended due to likely future conflict with the proposed extension and some due to poor condition.
- 3.3.1** The three Alder trees (T9, T10 & T13) have a significant lean towards the house (photo 01). Given the anticipated future growth of these two trees, it would be prudent to remove them as part of good management irrespective of the proposed extension works.
- 3.3.2** The two Elderberry trees T5 and T8, dead and moribund respectively, again are recommended to be removed irrespective of the proposed extension works, (photo 02 & 03).

#### Proposed Tree Removal

| Category | Total | Tree Tag / Number |
|----------|-------|-------------------|
| Cat A    |       |                   |
| Cat B    |       |                   |
| Cat C    | 3     | T9, T10 and T13   |
| Cat U    | 2     | T5 and T8         |

- 3.4** There will be no requirement to excavate for the placement of foundations within the calculated root protection area (RPA) of any of the existing site trees. However, to deter building contractors from venturing into and storing building materials within a tree RPA it is recommended that temporary protective fencing be installed. To allow sufficient workspace, however, the protective fencing will have to be slightly offset around the RPA of trees T1 and T2. These exposed parts of T1 and T2 RPAs should be covered with temporary ground protection. The protective fencing and ground protection specifications are noted in the Recommendations, section 5 of the report.
- 3.5** Minor crown lift facilitation pruning is recommended to trees T11 and T12 (photo 04). The pruning specifications are noted in the Recommendations, section 5 of the report.

#### 4 CONCLUSIONS:

- 4.1** Although the proposed property extension will require removal of 5 trees and minor pruning of another 2 trees, these works are considered to be in keeping with good arboricultural practice and are not expected to negatively impact the visual arboricultural amenity of the area.
- 4.2 Other Considerations:** Trees by their very nature have structures that allow bats to shelter or roost in them, more so with moribund and decayed trees. All species of bats are protected by the Wildlife and Countryside Act 1981 (as amended), the Conservation (Natural Habitats) regulations 1994 and the Countryside Act and Rights of Way Act 2000. Also, it is an offence to disturb or destroy nesting birds. Appropriate ecological assessments should be undertaken to avoid contravention of the above.

## 5 RECOMMENDATIONS: Arboricultural Method Statement (AMS);

### 5.1 Prior to any other activity on the site the following arboricultural works should be undertaken.

**Table 1 Tree works:**

| Tree                  | Tree Work                                                                                                                      | Priority                      |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| T5, T8, T9, T10 & T13 | Fell to ground level and grind out the remaining stumps.                                                                       | Prior to any other site works |
| T11 & T12             | Crown lift the south side of the tree crowns to obtain a branch height clearance above ground level of approximately 4 metres. | Prior to any other site works |

- 5.1.1** All the recommended tree works should be of a standard that is in accordance with BS 3998:2010 Tree Work-Recommendations. All the arboricultural work on this site should be undertaken by an arboricultural contractor who is able to comply with the above BS standard. The arboricultural contractor should hold public liability insurance to a minimum of £5 million and employer's liability insurance as required by law. The arboricultural contractor should be able to show competency by means of relevant certification and health and safety policy. Suitable arboricultural contractors can be sourced from the Arboricultural Association approved contractor list, or the Local Planning Authority occasionally has lists of competent contractors. Rowbottom's Tree Services Ltd (arboricultural consultancy) cannot accept any liability where the prescribed work is not carried out in a correct and professional manner in accordance with current good practice.
- 5.1.2** The advised tree works within this report are recommended in order to facilitate the proposed extension works to the property. None of these tree works should be undertaken until there has been full approval from the Local Planning Authority.
- 5.2** After the above tree works have been completed, protective fencing should be erected at the locations indicated on the Tree Protection RTS/11112024/TPP 002; the protective fencing should be: - 2 metre tall herras fencing on rubber or concrete feet. The fence panels should be joined together using a minimum of two anti-tamper couplers. The vertical distance between the couplers should be at least 1 metre and uniform throughout the fence. The herras fence should be supported on the inner side (tree side) by stabiliser struts attached to rubber base feet and secured to the ground, as illustrated at appendix 5 (B). Signs should be attached to the fencing advising the contractors that this is a construction exclusion zone (CEZ); keep out. Following erection of the protective fencing, ground protection should be laid down at the location indicated on the Tree Protection Plan RTS/11112024/TPP 002. The ground protection should be a single thickness of suitable load bearing ground mats (e.g., 40mm TuffTrak pads) laid on a compressible 50mm thick layer of wood chippings all placed on top of a geotextile membrane.
- 5.3** Upon completion of the above arboricultural works, installation of the protective fencing and laying down of the ground protection site construction may proceed following the guidance of this AMS. Only on completion of all building activity should the tree protective fencing and ground protection be removed.
- 5.4** **Landscaping:** Following completion of the building works all garden landscaping should be undertaken using handheld tools only, no mechanical rotavators or excavation machinery is to be used within a tree RPA. The landscaping is to include removal of the poorly formed hawthorn hedge along the eastern garden boundary and replacing it with new hawthorn plants, as recommended by the Rochdale Council arboricultural officer.

- 5.5 Fires on the site should be avoided if possible. Where they are unavoidable, they should not be lit in a position where heat could affect tree foliage or branches. The potential size of a fire and wind direction should be taken into account when determining its location and it should be attended at all times until safe enough to leave.
- 5.5 Any materials whose accidental spillage would cause damage to a tree (e.g. oil, cement washing and vehicle washings etc.) should be stored and handled well away from the outer edge of its RPA.
- 5.6 All operatives of machinery and heavy plant should be made aware of the construction exclusion zones (CEZ). The operatives are to respect these zones and ensure that no damage occurs to trees due to careless use of machinery.
- 5.7 Siting of cabins and storage of building materials should be outside of the CEZ. Any proposal to install cabins or store materials within a CEZ should be agreed with the appointed arboriculturist and the Local Planning Authority prior to such installation.
- 5.8 A project arboriculturist should be appointed to ensure that compliance with tree protection requirements are upheld. The appointed arboriculturist should be an individual acceptable to the local authority. They must have a good understanding of the project requirements and be suitably qualified to understand the hazards associated with development near trees. They should work closely with the site manager and have the authority to stop works until any major issues which could affect the retained trees have been resolved. They should keep the local authority updated at each stage of the project, including reporting of any unexpected issues which could affect the trees that are being retained. I can offer this service, or advice on the selection of a suitably qualified and experience individual.

## 6 BIBLIOGRAPHY

### 6.1 BS 5837:2012 Trees in Relation to Design, Demolition and Construction - Recommendations



Mr W. J. Rowbottom. HN Dip ARB

M. Arbor. A

**Copyright:** All rights to this report are reserved. It may only be used by the addresses for the purpose described in point 1.6 above. No part may be reproduced or transmitted in any form, or by any means, electronic, mechanical, by photocopying, recording or otherwise, or stored in any retrieval system of any nature, without the written consent of Rowbottom's Tree Services Ltd. Until all fees rendered by the consultant to the client have been paid in full, the copyright of any documents, forms, statements, maps, plans and other such material will remain vested in Rowbottom's Tree Services Ltd. No unauthorised use of such material may be made by the client, or any other person purporting to be acting on their behalf. It may not be sold, lent, hired out or divulged to any third party not directly involved with this site without the written consent of Rowbottom's Tree Services Ltd.

## Appendix 1

---

### **Brief qualifications and experience of Mr W. J. Rowbottom.**

**1. Qualifications:**

- Tree surgery craft certificate 1992
- BTEC Higher National Diploma in Arboriculture 2000 (HN Dip Arb).

**2. International Society of Arboriculture (ISA):**

- Tree Risk Assessment Qualification (TRAQ).  
This is a systematic qualification of risks that may be posed by trees within their existing site setting over a given time frame.

**3. Continuing professional development:** Professional member of the Arboricultural Association.  
M Arbor A. Professional member of the Consulting Arborist Society (CAS).

**4. Experience:** Managed an arboricultural contracting company for 20 years. Practiced arboricultural consultancy since 2010.

## Appendix 2

### Trees and Construction Sites – General Issues

Trees that have good health and stability are well adapted to their surroundings. Any demolition or construction activity which affects the adaptation of trees to the site could be detrimental to their health, future growth and safety. Trees tend to become less tolerant of change after they have reached maturity or have suffered previous damage or physiological stress. Site design and subsequent management, therefore, should aim to minimize the effect of change.

The part of a tree most susceptible to damage on a construction site is the root system, which, because it is not immediately visible, is frequently ignored. Within a short distance of the trunk, the roots become highly branched, so as to form a network of small diameter woody roots, which can extend radially for a distance much greater than the canopy spread of the tree, except where impeded by unfavourable soil conditions. The growth and development of all roots is influenced by the availability of water, nutrients, oxygen and the penetrability of the soil. Given favourable conditions, the tree's root system tends to develop sufficient volume to provide physical stability for the tree. Typically, however, around 80% of a tree root system is concentrated in the upper 600mm of the soil profile. Due to this relatively shallow depth, the threat to a tree root system on a development site can arise from:

- Root severance or fracture during excavation works
- Compaction of the soil structure, which restricts moisture percolation through the soil profile and gaseous exchange between the surface air and soil atmosphere. Soil compaction can occur as a result of driving heavy plant machinery over the soil surface, repetitive pedestrian footfall and storage of building materials.
- Waterlogging due to land grade changes
- Toxic contamination due to chemical runoff from construction activities.

Damage to the tree trunk and branches can also occur on development sites if appropriate distances between tree and construction work is not maintained. Such damage, however, is not usually sufficient to kill a tree directly, but can make it unsafe by affecting the dynamics and growth of the tree, or by initiating long term decay. Such damage can also be disfiguring. The attachment of notice boards and cables etc. can all damage trees, as can the use of tree trunks as a winch anchor.

Damage to a tree on a construction site may not at first be noticeably obvious, the full effect of such damage usually taking 3 or 4 years to become evident, at which time the tree may die and/or become unsafe. A tree that has taken decades to reach maturity can be damaged irreparably in a few minutes by actions that might be unwitting, negligent or wilful. The early provision of physical protection of the tree from damage is therefore critical.

## Appendix 3

### Tree Data (Explanations of):

The data collected and recorded on each tree reflects the recommendations provided in section 4.4.2 of BS 5837:2012 Trees in Relation to Design, Demolition and Construction-recommendations.

**Tree number:** T (individual tree), G (group of stems or several trees planted together or self-seeded), S (stump of a tree that has been cut at or close to ground level), SH (shrub masses).

**Species:** Common tree name; *specific name recorded in italics*.

**Height:** Approximate height of the tree to the nearest metre.

**DBH:** Stem diameter (recorded in millimetres) measured in accordance with Annex C of the BS 5837:2012.

**Crown Spread:** A record (to the nearest half metre) of the radial distances between the tree trunk and the end of the further most branches, in the direction of the four cardinal compass points.

**Height to Lowest Branch:** This parameter estimates the lowest point of the crown above the ground. Minor and dead branches are ignored.

**Age:** Estimated maturity of the tree; Moribund (at the point of death), Mature (last one third of life expectancy), Early mature (one third to two thirds life expectancy), Young (at less than one third of life expectancy).

**Condition:** An assessment of tree physiological condition. Good (high vigour and strong growth), fair (average vigour and growth), Poor (low vigour and declining growth).

**Category Rating:** An assessment to identify the quality and value (in non-fiscal terms) of the existing tree stock, allowing informed decisions to be made concerning which trees should be removed or retained in the event of a development occurring, (for categorisation criterion see appendix 7).

**Observations and Comments:** A preliminary observation of the tree's physiological condition, structural form and its suitability to the existing site setting. Basic tree management advice may be recommended.


## Appendix 4

### Explanatory notes

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AIA:</b>           | Arboricultural Impact Assessment; an assessment that evaluates the effects that the proposed design may have on the existing site trees and any constraints that the trees pose to the design, and where necessary recommend mitigation measures.                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>AMS:</b>           | Arboricultural Method Statement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>CEZ:</b>           | Construction Exclusion Zone; a fenced off area around a tree or group of trees that should remain undisturbed and free from demolition and construction activity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Crown:</b>         | The structural part of the tree above ground level that consists of branches, twigs and foliage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Included Bark:</b> | Bark that remains (trapped) between branch and trunk or co-dominant stems. Has potential to be a structurally weak union.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Measurements:</b>  | All dimensions are estimated unless otherwise indicated. Measurements taken with a tape or clinometer are indicated with a *. Less reliable estimated dimensions are indicated with a ‘?’.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>RPA:</b>           | Root Protection Area; The minimum area around a tree deemed to contain sufficient roots and soil volume to maintain the tree’s viability, and where the protection of roots and soil structure is treated as a priority. The RPA increases with tree size and is calculated from a measurement of the trunk diameter.                                                                                                                                                                                                                                                                                                             |
| <b>Species:</b>       | The tree species identification is based on visual identification. The common English name of what the tree appeared to be is listed first followed by the botanical name in <i>italics</i> . In some instances, it may be difficult to quickly and accurately identify a particular tree without further detailed investigation. Where there is some doubt as to the precise species of the tree, the genus is followed by the abbreviation spp; in order to avoid delay in the production of the report. The species listed for groups and hedges represent the main component and there may be other minor species not listed. |
| <b>TRAQ:</b>          | Tree Risk Assessment Qualification. A tree risk qualification methodology; Level one; is a basic visual assessment of an individual tree or a population of trees near to targets of concern, conducted from a specified perspective, to identify obvious defects or specified conditions. Only defects visible from the perspective from which the assessment is made are expected to be identified.                                                                                                                                                                                                                             |
| <b>VTA:</b>           | Visual Tree Assessment; a non-invasive method of examining the health and structural condition of individual trees, as advised by Mattheck (1993) and Hazard Evaluation by Matheny and Clark (1993). Guidance is also taken from Lonsdale (1999) Principles of Tree Hazard Assessment and Management.                                                                                                                                                                                                                                                                                                                             |

## Appendix 5 (A)

### Protective Fencing Specification

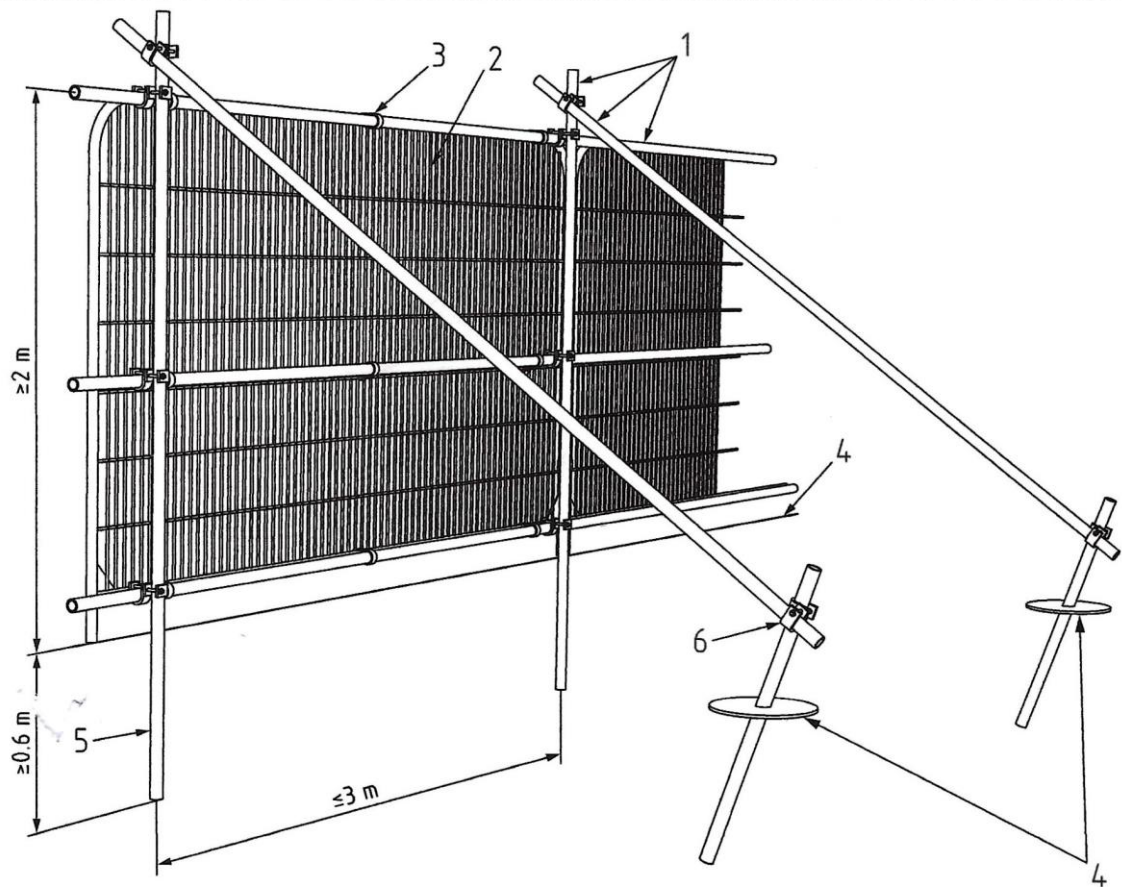


#### Key

- 1 Standard scaffold poles
- 2 Heavy gauge 2 m tall galvanized tube and welded mesh infill panels
- 3 Panels secured to uprights and cross-members with wire ties
- 4 Ground level
- 5 Uprights driven into the ground until secure (minimum depth 0.6 m)
- 6 Standard scaffold clamps

## Appendix 5 (B)

### Protective Fencing Specification

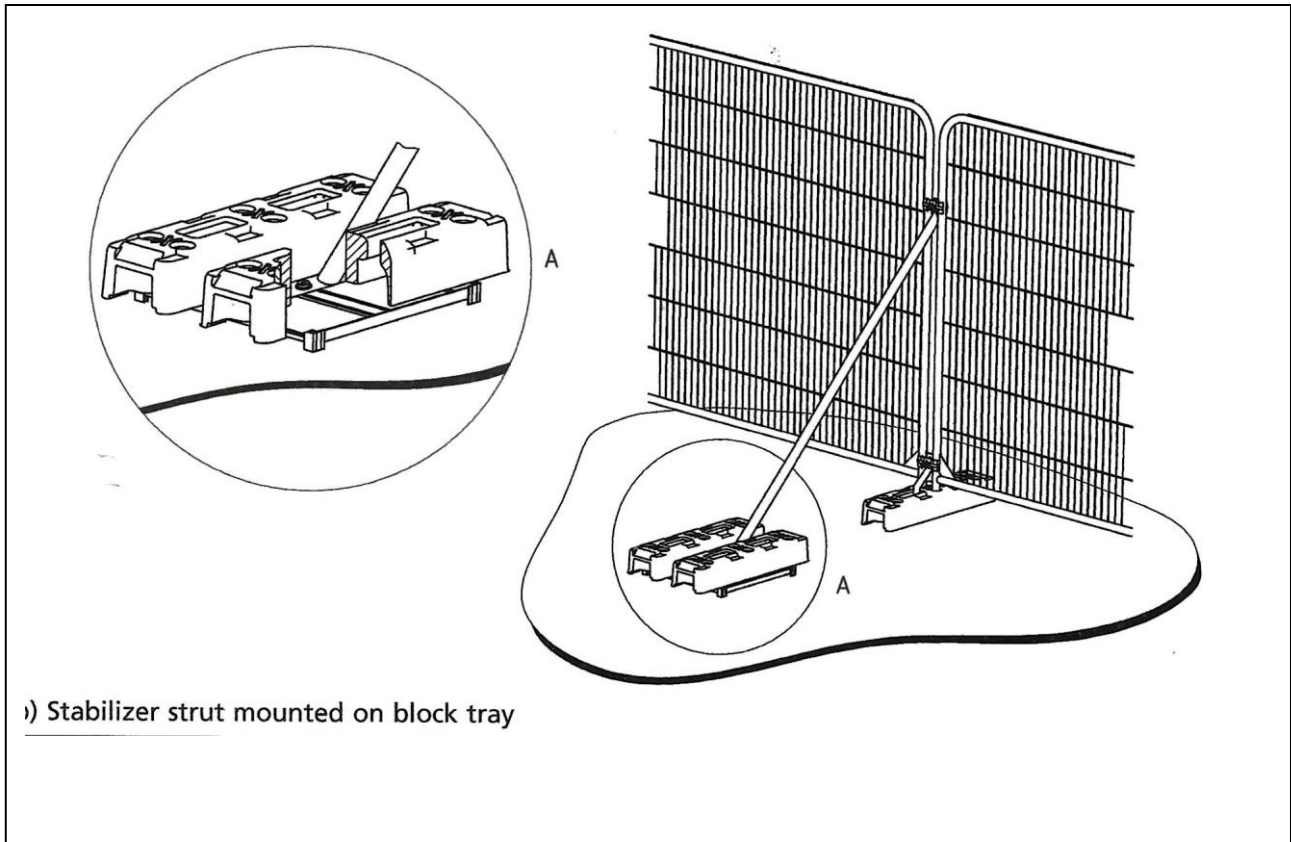

**Appendix 6**  
Tree Schedule

| Tree No | Species                                      | Height (M) *<br>Crown Height above GL | DBH (mm) * | Crown Spread (M) *                       | Height to Lowest Branch (M)<br>Direction of Lowest Branch | Age Range       | Condition | RPA Radius (M) | RPA Square metres | BS 5837 Category Rating | Observations and Comments                                                                  |
|---------|----------------------------------------------|---------------------------------------|------------|------------------------------------------|-----------------------------------------------------------|-----------------|-----------|----------------|-------------------|-------------------------|--------------------------------------------------------------------------------------------|
| T1      | <b>Hornbeam</b><br><i>Carpinus betulus</i>   | <u>8.0</u><br>3.0                     | 260        | N – 4.0<br>S – 1.5<br>E – 1.5<br>W – 4.5 | <u>2.5</u><br>E                                           | Early<br>Mature | Fair      | 3.1            | 30                | C1                      | Crown asymmetry, over-pruned at the southern side.                                         |
| T2      | <b>Alder</b><br><i>Alnus glutinosa</i>       | <u>15.5</u><br>6.0                    | 495        | N – 6.0<br>S – 3.0<br>E – 3.5<br>W – 3.5 | <u>6.0</u><br>W                                           | Mature          | Fair      | 5.9            | 109               | C1                      | A tall slender tree, slight crown asymmetry.                                               |
| T3      | <b>Scots Pine</b><br><i>Pinus sylvestris</i> | <u>16.0</u><br>9.0                    | 390        | N – 3.0<br>S – 3.0<br>E – 2.0<br>W – 2.0 | <u>9.0</u><br>E                                           | Mature          | Fair      | 4.6            | 66                | C1                      | A tall slender tree, ivy climber ascending the trunk.                                      |
| T4      | <b>Scots Pine</b><br><i>Pinus sylvestris</i> | <u>16.0</u><br>3.0                    | 450        | N – 4.0<br>S – 3.5<br>E – 4.0<br>W – 5.5 | <u>3.0</u><br>W                                           | Mature          | Good      | 5.4            | 91                | B1                      | A tall tree, slight crown asymmetry.                                                       |
| T5      | <b>Elderberry</b><br><i>Sambucus nigra</i>   | <u>6.0</u><br>3.0                     | 280        | N – 3.0<br>S – 3.0<br>E – 1.0<br>W – 4.5 | <u>1.5</u><br>N                                           | Dead            | Dead      | N/A            | N/A               | U                       | A dead tree                                                                                |
| T6      | <b>Larch</b><br><i>Larix decidua</i>         | <u>16.0</u><br>6.0                    | 365        | N – 4.0<br>S – 3.0<br>E – 3.0<br>W – 4.0 | <u>5.0</u><br>N                                           | Mature          | Fair      | 4.3            | 58                | C1                      | A tall slender tree, ivy climber ascending the trunk.<br>Minor dead branches in the crown. |

| Tree No | Species                                       | Height (M) *<br>Crown Height above GL | DBH (mm) *      | Crown Spread (M) *                       | Height to Lowest Branch (M)<br>Direction of Lowest Branch | Age Range | Condition | RPA Radius (M) | RPA Square metres | BS 5837 Category Rating | Observations and Comments                                              |
|---------|-----------------------------------------------|---------------------------------------|-----------------|------------------------------------------|-----------------------------------------------------------|-----------|-----------|----------------|-------------------|-------------------------|------------------------------------------------------------------------|
| T7      | <b>Alder</b><br><i>Alnus glutinosa</i>        | <u>17.0</u><br>3.0                    | 380             | N – 5.0<br>S – 5.5<br>E – 3.0<br>W – 6.0 | <u>3.0</u><br>W                                           | Mature    | Good      | 4.5            | 63                | B1                      | Slight crown asymmetry, ivy climber ascending the trunk.               |
| T8      | <b>Elderberry</b><br><i>Sambucus nigra</i>    | <u>10.0</u><br>4.0                    | 200             | N – 9.0<br>S – 1.0<br>E – 2.0<br>W – 3.0 | <u>4.0</u><br>N                                           | Moribund  | Moribund  | N/A            | N/A               | U                       | A moribund tree that has part fallen and is hung-up on adjacent trees. |
| T9      | <b>Alder</b><br><i>Alnus glutinosa</i>        | <u>17.0</u><br>3.0                    | 300             | N – 1.0<br>S – 6.0<br>E – 6.0<br>W – 2.0 | <u>3.0</u><br>S                                           | Mature    | Fair      | 3.6            | 40                | C1                      | Asymmetric growth lean towards the house.                              |
| T10     | <b>Alder</b><br><i>Alnus glutinosa</i>        | <u>17.0</u><br>6.0                    | 300             | N – 1.0<br>S – 8.0<br>E – 1.0<br>W – 3.0 | <u>6.0</u><br>S                                           | Mature    | Fair      | 3.6            | 40                | C1                      | Asymmetric growth lean towards the house.                              |
| T11     | <b>Sycamore</b><br><i>Acer pseudoplatanus</i> | <u>18.0</u><br>3.0                    | 390             | N – 7.0<br>S – 7.0<br>E – 7.0<br>W – 4.0 | <u>3.0</u><br>S                                           | Mature    | Good      | 4.6            | 66                | B1                      | Slight crown asymmetry, Ivy climber ascending the trunk.               |
| T12     | <b>Sycamore</b><br><i>Acer pseudoplatanus</i> | <u>16.0</u><br>3.0                    | 429<br>combined | N – 5.0<br>S – 6.5<br>E – 3.0<br>W – 4.0 | <u>2.5</u><br>S                                           | Mature    | Fair      | 5.1            | 81                | C1                      | A twin-stemmed tree, Ivy climber ascending.                            |

| Tree No | Species                                       | Height (M) *<br>Crown Height above GL | DBH (mm) * | Crown Spread (M) *                       | Height to Lowest Branch (M)<br>Direction of Lowest Branch | Age Range       | Condition | RPA Radius (M) | RPA Square metres | BS 5837 Category Rating | Observations and Comments                                        |
|---------|-----------------------------------------------|---------------------------------------|------------|------------------------------------------|-----------------------------------------------------------|-----------------|-----------|----------------|-------------------|-------------------------|------------------------------------------------------------------|
| T13     | <b>Alder</b><br><i>Alnus glutinosa</i>        | <u>11.0</u><br>4.0                    | 230        | N – 1.0<br>S – 6.0<br>E – 2.0<br>W – 4.0 | <u>3.0</u><br>S                                           | Early<br>Mature | Fair      | 2.7            | 22                | C1                      | The tree has an asymmetric growth lean towards the south.        |
| T14     | <b>Sycamore</b><br><i>Acer pseudoplatanus</i> | <u>16.0</u><br>4.0                    | 335        | N – 5.0<br>S – 6.0<br>E – 3.0<br>W – 2.0 | <u>4.0</u><br>S                                           | Mature          | Good      | 4.0            | 50                | B1                      | Ivy climber ascending the trunk.                                 |
| T15     | <b>Sycamore</b><br><i>Acer pseudoplatanus</i> | <u>16.0</u><br>3.0                    | 440        | N – 3.0<br>S – 6.5<br>E – 4.0<br>W – 4.0 | <u>3.0</u><br>S                                           | Mature          | Fair      | 5.2            | 84                | C1                      | Slight crown asymmetry; minor dead branches in the crown.        |
| T16     | <b>Scots Pine</b><br><i>Pinus sylvestris</i>  | <u>12.0</u><br>2.0                    | 305        | N – 1.0<br>S – 5.0<br>E – 2.5<br>W – 3.0 | <u>2.0</u><br>S                                           | Early<br>Mature | Fair      | 3.6            | 40                | C1                      | Slight crown asymmetry. The tree is close to the boundary fence. |

**Appendix 7**

**Tree Quality Assessment and Categorization Criterion**

**Category U:** Trees unsuitable for retention.

Trees which are in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years. These trees, however, can have existing or potential conservation value. They could, therefore, be up graded from a U category if issues concerning their safety can be appropriately managed.

Trees to be considered for retention.

**Category A: trees of high quality**

**Have an estimated remaining life expectancy of at least 40 years.**

**Category B: Trees of moderate quality**

**Have an estimated remaining life expectancy of at least 20 years.**

**Category C: Trees of low quality.**

**Have an estimated life expectancy of at least 10 years, or young trees with a stem diameter below 150mm.**

For a tree to qualify under any given category, it should fall within the scope of that categories definition (U, A, B, C).

Trees in categories A to C should then qualify under one or more of three subcategories (1, 2, and 3). The subcategories 1, 2 and 3 are intended to reflect arboricultural and landscape qualities, and cultural values, respectively. These definitions are described below:

**Identification on the plan**

**Dark Red**

**Light Green**

**Mid Blue**

**Grey**

**Arboricultural Qualities:****Sub-Category A1:**

Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and / or principal trees within an avenue).

**Sub-Category B1:** Trees that might be included in category A, but have been downgraded because of impaired condition (e.g. presence of significant though remediable defects, including unsympathetic past management and storm damage), such that they are unlikely to be suitable for beyond 40 years; or trees lacking the special quality necessary to merit the category A designation.

**Sub-Category C1:** Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories.

**Landscape Qualities:**

**Sub-Category A2:** Trees, groups or woodlands of particular visual importance as arboricultural and / or landscape features.

**Sub-Category B2:** Trees present in numbers, usually growing as groups or woodlands, such that they attract a higher collective rating than they might as individuals; or trees occurring as collectives but situated so as to make little visual contribution to the wider locality.

**Sub-Category C2:** Trees present in groups or woodlands, but without this conferring on them significantly greater collective landscape value; and / or trees offering low or only temporary / transient benefits.

**Cultural Values:**

**Sub-Category A3:** Trees or woodlands of significant conservation, historical, commercial or other value (e.g. veteran trees or woodland pasture).

**Sub-Category B3:** Trees with material conservation or other cultural value.

**Sub-category C3:** Trees with no material conservation or other cultural value.

## Appendix 8:

## Site Photos

Photo 01:



Photo 02:



**Photo 03:**



**Photo 04:**

