

# BROWN STREET, LITTLEBOROUGH GREATER MANCHESTER

## FLOOD RISK ASSESSMENT & OUTLINE DRAINAGE STRATEGY

**Job Number:** FRA20 1133  
**Date:** April 2020  
**Client:** NJA Pension Scheme



INCREASING LAND VALUE

LK  
GROUP

| <b>LK Consult</b>            |                                                   |                       |                                                                                      |
|------------------------------|---------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------|
| <b>Document Verification</b> |                                                   |                       |                                                                                      |
| <b>Site Address</b>          | Land at Brown Street, Littleborough, OL15 8BW     |                       |                                                                                      |
| <b>Report Title</b>          | Flood Risk Assessment & Outline Drainage Strategy |                       |                                                                                      |
| <b>Job Number</b>            | FRA 20 1133                                       | <b>Document Ref.</b>  | FRA 20 1133 – R0                                                                     |
| <b>Date Issued</b>           | April 2020                                        | <b>Report Version</b> | R0                                                                                   |
| <b>Prepared By</b>           | Matthew Craig                                     | <b>Signature</b>      |   |
| <b>Reviewed By</b>           | Mark Jones                                        | <b>Signature</b>      |  |

| <b>Revision Record</b> |             |                           |                    |
|------------------------|-------------|---------------------------|--------------------|
| <b>Revision No.</b>    | <b>Date</b> | <b>Nature of Revision</b> | <b>Approved By</b> |
|                        |             |                           |                    |

## DISCLAIMER

This report has been prepared by LK Consult (LKC) who have exercised such professional skill, care and diligence as may reasonably be expected of a properly qualified and competent consultant, experienced in preparing reports of a similar scope.

However, to the extent that the report is based or relies upon information contained in records, reports or other materials provided to LKC, which have not been independently produced or verified, LKC gives no warranty, representation or assurance as to the accuracy or completeness of such information.

This report is prepared solely for the benefit of NJA Pension Scheme. It may not be relied upon by, or submitted to a third party for their reliance for the purposes of valuation, mortgage, insurance and regulatory approval, until all invoices have been settled in full.

Those using this information in subsequent assessments or evaluations do so at their own risk.

## EXECUTIVE SUMMARY

### Scope and Background

This Flood Risk Assessment and Outline Drainage Strategy (FRA) has been undertaken by LK Consult Ltd (LKC) to support a planning application for the development of land at Brown Street, Littleborough. The development comprises a residential development with provision for soft landscaping and car parking.

LKC has prepared this FRA in line with the NPPF and Technical Guidance where appropriate.

In considering the proposals the following key principles have therefore been applied:

- Identification of flood risks.
- Protection of users of the new development.
- No increased flood risk to third parties.

### Consultations

The Environment Agency (EA) has been consulted to inform the preparation of this report. They have provided a more detailed flood map, but no modelled data was available.

Rochdale Borough Council and United Utilities were also consulted concerning flood risk.

All relevant consultees have confirmed that there is a Negligible to Very Low risk of flooding to this site from all sources.

### Flood Risk

Environment Agency flood maps indicate that the site is not vulnerable to fluvial flooding from the adjacent watercourse, or the River Roch to the south of the site.

The site is shown on the Environment Agency's (EA) website Flood Zone Mapping as being in Flood Zone 1 (PPG Table 1).

The site is in Flood Zone 1 – Very Low Risk – annual probability of flooding less than 0.1% (1 in 1000).

The majority of the site is at Very Low Risk of surface water flooding. There is a small area of Medium to High Risk of surface water flooding in the western part of the site.

### Mitigation

#### *Design*

Site falls will be arranged to allow reasonably level access for occupants and visitors and allowing the site to be free-draining in case of local ponding at times of heavy rainfall. Floor levels of dwellings will be set as high as possible above the flood level giving regard to necessary access for the less-able.

The development will not result in any reduction in flood plain storage compared to the existing situation.

In considering the potential drainage options for the site it is assumed that surface water runoff arising from the development will discharge into an infiltration basin.

In considering the potential drainage options for the site at present it is assumed that surface water runoff arising from the development will discharge into the existing culvert to the west.

The proposed development will decrease the proportion of the site covered by impermeable surfaces and will therefore generate less runoff. Attenuation will however be required.

The outline drainage strategy considers the use of infiltration-based SuDS. Therefore, the most effective strategy, in line with the SuDS management train, would be to have an infiltration facility within the western part of the site. The required storage volume has been estimated to be **199.2m<sup>3</sup>**.

The outline drainage strategy also considers the use of attenuation-based SuDS to be feasible with a discharge to the adjacent sewer. For the 1 in 30 year storm event, the required detention tank or similar has been estimated to be **31.1m<sup>3</sup>** for the 5l/s limited flow restriction.

Similarly, the estimated volume to be retained on site for the 1 in 100-year storm event including the allowance for climate change is between **63.7m<sup>3</sup>** and **80.4m<sup>3</sup>**.

The site is considered to be at low risk of flooding. It is recommended that the minimum finished floor levels for the development should be set at a nominal height above the proposed ground levels. This is to allow for overland flow during exceedance flows from an extreme event or a drainage failure.

## **Access**

Access close to the site is elevated above potential flood levels and will always provide safe access to and from the site from Brown Street.

## Contents

|                                                 |            |
|-------------------------------------------------|------------|
| <b>EXECUTIVE SUMMARY</b>                        | <b>iii</b> |
| <b>1 Introduction</b>                           | <b>1</b>   |
| 1.1 Background                                  | 1          |
| 1.2 Site Details                                | 2          |
| <b>2 Site Setting</b>                           | <b>3</b>   |
| 2.1 Vulnerability                               | 3          |
| 2.2 The Sequential and Exception Tests          | 3          |
| 2.3 Environmental Setting                       | 4          |
| 2.4 Site Reconnaissance                         | 4          |
| 2.5 Site and Access Levels                      | 4          |
| <b>3 Consultation</b>                           | <b>5</b>   |
| <b>4 Assessment of Flood Risk</b>               | <b>7</b>   |
| 4.1 Flood Zones                                 | 7          |
| 4.2 Sources of Flooding                         | 7          |
| 4.3 Summary of Flood Risk                       | 8          |
| <b>5 Surface Water Management</b>               | <b>9</b>   |
| 5.1 Infiltration                                | 9          |
| 5.2 Surface Water Drainage Strategy             | 10         |
| 5.3 Surface Water Attenuation Requirements      | 15         |
| 5.4 Site Specific SuDS                          | 16         |
| 5.5 Foul Drainage                               | 16         |
| <b>6 Mitigation Measures</b>                    | <b>17</b>  |
| 6.1 Proposed Site levels and Developments Level | 17         |
| 6.2 Safe Access                                 | 17         |
| 6.3 Flood Resistance and Resilience             | 17         |
| 6.4 Residual Risk                               | 17         |
| <b>7 Conclusions</b>                            | <b>19</b>  |

## **Appendices**

- Appendix A: Figures, Plans and Drawings
- Appendix B: Site Information
- Appendix C: Environment Agency Data
- Appendix D: Consultee Correspondence
- Appendix E: Calculations

## **1 Introduction**

### **1.1 Background**

LK Consult Ltd (LKC) were commissioned by CJ Partnership Ltd to carry out a Flood Risk Assessment (FRA) and Outline Drainage Strategy for land at Brown Street, Littleborough. The report was undertaken in support of a planning application to redevelop the site for residential use.

The report will address the vulnerability to flooding from all possible sources and will also consider the impact of the development on surface water runoff accounting for climate change and the potential to increase flood risk elsewhere. The Outline Drainage Strategy in Section 5 will provide an overview of the SuDS techniques which could be considered on the site. The issues of actual flood risk are discussed in Section 4.

Government policy with respect to development in flood risk areas is contained within the Department of Communities and Local Government National Planning Policy Framework<sup>1</sup> and accompanying Technical Guidance of March 2012 (revised to the Planning Practice Guidance (PPG)<sup>2</sup>, which supersedes Planning Policy Statement 25 (PPS25) 'Development and Flood Risk'. The guidance on Climate Change allowance issued by the Environment Agency in February 2016 has also been considered.

LKC has prepared this Flood Risk Assessment (FRA) in line with the NPPF and the PPG where appropriate. The level of detail entered into any flood risk assessment is dependent upon the scale and potential impact of the proposed development, and the vulnerability classification of the proposed land-use.

SuDS should be designed where practical to maximise the opportunities and benefits that can be secured from surface water management. The strategy will consider the four 'pillars' of SuDS. To maximise these benefits, surface water management should be considered from the beginning of the development planning process and throughout influencing site and wildlife layout and design, and the use and characteristics of open spaces.

The main drivers for SuDS are the controlling water quantity and water quality<sup>3</sup> (Plate 1), with an increasing emphasis on amenity and biodiversity benefits where practical.

---

<sup>1</sup> DCLG (2018). "National Planning Policy Framework." Department of Communities and Local Government. June 2018.

<sup>2</sup> DCLG (2014). "Planning Practice Guidance" <http://planningguidance.communities.gov.uk>, April 2014.

<sup>3</sup> The SuDS Manual (C753) – CIRIA November 2015.

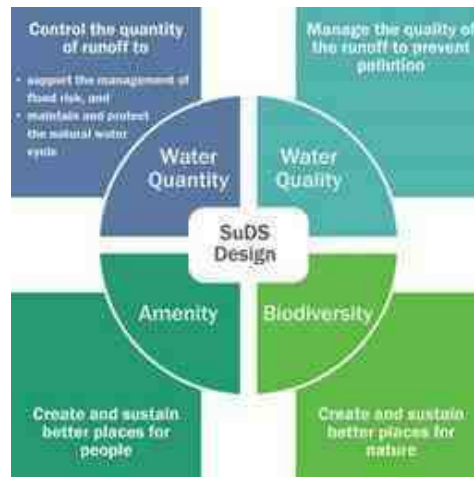


Plate 1: Four 'pillars' of SuDS design as defined by CIRIA in The SuDS Manual.

## 1.2 Site Details

A summary of the general site details is presented in Table 1-1. Plans, Drawings and Figures are provided in Appendix A. Figures 1 and 2 indicate the site location and boundary. Figure 3 indicates the proposed development.

| Site Details                |                                                                                                                                                                                                                                 |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Location</b>             | West of Brown Street, Littleborough, Greater Manchester, OL15 8BW. Centred at approximate National Grid Reference 393522E 416427N.                                                                                              |
| <b>Area</b>                 | Approximately 0.42ha.                                                                                                                                                                                                           |
| <b>Topography</b>           | Approximately 150m in the north, falling to approximately 148m in the southwest.<br>Site is sloping down gently to the southwest.                                                                                               |
| <b>Current Land Use</b>     | <u>Site</u><br>Hardwood concrete and gravel yard with industrial buildings.<br><u>Surrounding Area/ Boundary Treatment</u><br>North: Parkland.<br>East: Residential area.<br>South: Residential area.<br>West: Industrial area. |
| <b>Proposed Development</b> | Residential development with provision for soft landscaping and car parking.                                                                                                                                                    |

Table 1-1: Summary of site details.

## **2 Site Setting**

### **2.1 Vulnerability**

As an initial phase in identifying whether a site is potentially at risk of flooding, LKC has consulted the Environment Agency's (EA) website Flood Zone Mapping. This mapping is (often) based on coarse scale modelling and provides only an initial indication of the flood risk to a site. The Environment Agency Flood Zone maps were developed using a very coarse Digital Elevation Map (DEM) and are superseded by a more detailed analysis of modelled flood levels and topographic survey levels.

The Flood Zones divide the floodplain into three categories of flood risk, and do not take flood defences into account. The NPPF defines the Flood Zones as:

- Flood Zone 1 – little or no risk, with annual probability of flooding from rivers and the sea of less than 0.1% (1 in 1000).
- Flood Zone 2 – low risk, with annual probability of flooding of 0.1 to 1.0% from rivers and 0.1 to 0.5% from the sea.
- Flood Zone 3 – medium to high risk of flooding with an annual probability of flooding of 1.0% or greater from rivers, and 0.5% or greater from the sea.

The Flood Zone Mapping indicates the site as being within Flood Zone 1 in the PPG (paragraph 065, Table 1).

The proposed development is for a residential end use and this is classified within the 'More Vulnerable' category in the PPG (paragraph 066, Table 2).

### **2.2 The Sequential and Exception Tests**

The NPPF does not require that the Sequential Test be applied to development proposals in Flood Zone 1. Since the site has been shown to be located in Zone 1 for flood risk (see section 4.1), a sequential approach should not be required for planning.

However, the principles should still be applied for developments within the site such that, for example, dwellings are situated on a high part of the site when there is a risk of local surface water flooding. The issues of actual flood risk are discussed below. The issues of safety and reduction in flood risk to others required by an Exception Test are also addressed in this document.

The Local Planning Authority (LPA) will make the final decision with regard to any planning application.

## 2.3 Environmental Setting

LKC has undertaken a review of public domain information including British Geological Survey data, Environment Agency data, historical mapping and aerial photography to provide a summary of the environmental setting of the site. This is summarised in Table 2-1 below.

| Summary of the Environmental Setting |                                         |                                                                                                                                                       |
|--------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Geology                              | Superficial                             | - Alluvial Fan Deposits – Sand and Gravel.                                                                                                            |
|                                      | Bedrock                                 | - Pennine Lower Coal Measures Formation – Mudstone, Siltstone and Sandstone.                                                                          |
|                                      | BGS Boreholes                           | BH Ref: SD91 NW7, 100m west: Made ground to 3.81m. Varying sand, gravel and boulders to 37.03m. Varying Shale and Coal to 62.79. Gritstone to 99.52m. |
| Hydrogeology                         | Superficial                             | - Secondary (undifferentiated) aquifer to the west; Secondary A aquifer to the east.                                                                  |
|                                      | Bedrock                                 | - Secondary A aquifer.                                                                                                                                |
| Hydrology                            | All adjacent and internal surface water | - There is culverted watercourse to the western boundary. The site is also positioned approximately 200m to the north of the River Roch.              |
| Site History                         |                                         | - Industrial land use, pre-dating 1900.                                                                                                               |

Table 2-1: Summary of the Environmental Setting.

## 2.4 Site Reconnaissance

A site reconnaissance was undertaken in February 2020 and photographs are provided in Appendix B.

- » Site comprising former works building in the centre of the site, a self-storage unit area in the south with an access off Brown Street, a car park and rough overgrown area in the north.
- » Site comprising a mix of compacted gravel surfacing and soft ground areas. Limited areas of hardstood present adjacent to the existing building within the south of the site.
- » Site levels varying across the site. Generally, site is sloping towards the north and the west. There is a sharp drop by few meters in the centre of the site adjacent to the western boundary.
- » Site is higher than the area to the west and at the same level as Brown Street to the east.
- » Positive drainage was observed to the existing work building in form of roof gutters and downpipes connecting to the underground drainage system. No drainage observed to the storage units.
- » A public sewer was observed in Brown Street. Number of manholes observed.
- » Culverted watercourse manhole was noted northwest of the site, adjacent to public footpath. This was at few meters lower than the site levels.
- » Made ground was noted across the site, comprising of abundant ash and clinker to approx. 1mbgl.

## 2.5 Site and Access Levels

The site falls from approximately 150m in the north, to 148m in the southwest. The final site levels and ground floor levels of dwellings have not yet been determined. The proposed access would join Brown Street at around 149m AOD.

### 3 Consultation

Information from consultees (Environment Agency (EA), Rochdale Council, United Utilities) is summarised in Table 3-1 below.

Relevant correspondence / information is provided in Appendices C (EA) and D (others).

| Source             | Details                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment Agency | Flood Zone 1: very low risk, with annual probability of flooding from rivers and the sea of less than 0.1% (1 in 1000). |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                    | Modelled Levels for River Roch                                                                                          | The nearest modelled watercourse is the River Roch, which is approximately 200m to the south of the site. The site is significantly above the modelled flood levels for all modelled scenarios.<br><br>There is no modelled data associated with the adjacent watercourse.                                                                                                                                                                                                                                      |
|                    | Records of Flooding                                                                                                     | No records of flooding within the vicinity of the site.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                    | Records of Flood Warning Service                                                                                        | Not within a flood warning service area.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                    | Surface Water Flooding                                                                                                  | Very Low risk of surface water flooding across the majority of the site.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                    | Flooding from reservoirs                                                                                                | No risk from reservoirs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                    | Groundwater Source Protection Zone                                                                                      | Not within Source Protection Zone.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Rochdale Council   | Possible or known incidents of highway flooding                                                                         | There are no known historical flood incidents in the vicinity of the site.                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| United Utilities   | Likely conditions for connecting into their sewerage system                                                             | United Utilities would request conditions for a separate system with only foul draining to foul / combined sewers and surface water draining to soakaway/SuDS or watercourse.<br><br>- United Utilities Waste Developer department was contacted regarding sewer flooding history for the site. Water Company confirmed that they did have records of internal or external sewer flooding of properties in the vicinity of the site as a result of overloaded sewers.                                           |
|                    | Sewer map                                                                                                               | There is a 600mm diameter public surface water sewer to the northwest of the site, which becomes a 750mm diameter private sewer adjacent to the western site boundary.<br><br>There is a 825mm diameter public combined sewer to the west of the site, which reduces in diameter to 750mm to the south of the site. This is also joined by a 225mm diameter combined sewer within Victoria Street to the south, which itself is connected to a network of combined sewers within Brown Street to the southwest. |

Table 3-1: Summary consultee information.

| Source                                                | Details                                                                                                                                                                                  |                                                                                                    |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Strategic Flood Risk Assessment (SFRA)                | Level 1 SFRA <sup>4</sup>                                                                                                                                                                | There is no indication of any history of flooding from any source within the vicinity of the site. |
|                                                       | Level 2 SFRA <sup>5</sup>                                                                                                                                                                | There is no indication of any history of flooding from any source within the vicinity of the site. |
| Preliminary Flood Risk Assessment (PFRA) <sup>6</sup> | The Preliminary Flood Risk Assessment (PFRA) <sup>3</sup> for the area indicates that there are no records of flooding for the area, which conforms with information supplied by the EA. |                                                                                                    |

Table 3-1 (continued): Summary consultee information.

<sup>4</sup> Strategic Flood Risk Assessment Level 1: Bury, Rochdale and Oldham Councils; 2009, JBA Consulting.

<sup>5</sup> Strategic Flood Risk Assessment Level 2: Bury, Rochdale and Oldham Councils; 2009, JBA Consulting.

<sup>6</sup> Preliminary Flood Risk Assessment: Rochdale Metropolitan Borough Council; 2011, JBA Consulting.

## 4 Assessment of Flood Risk

### 4.1 Flood Zones

The detailed flood map provided by the EA indicates that the site is in Flood Zone 1 (see Appendix C).

A direct comparison was made between the provided EA flood levels at this location and the topographical levels.

The EA design flood levels are significantly lower than the site. It can be reasonably concluded on the evidence above that the site is in Flood Zone 1 for the purposes of this assessment.

Comparison of the modelling data and topographical survey indicates that the 1% (100-year plus CC) flood level would not affect any part of the site. Therefore, the actual flood position is much better than that indicated by the published flood map.

The extents of the 0.1% (1000-year) flood level remain outside of the development area.

### 4.2 Sources of Flooding

The risk of flooding from the following flood sources has been considered:

**Fluvial** – The EA has confirmed the study area is within Flood Zone 1. Therefore, the flood risk associated with this source is considered Very Low.

**Tidal** – The study area is remote from the sea and tidally influenced water bodies. Therefore, the flood risk associated with this source is considered Negligible.

**Pluvial (Rainfall)** – The surface water flood risk maps shows a small area at the western site boundary that has the potential to flood during prolonged heavy rainfall. This area is associated with a depression that is likely to be removed/positively drained following the development process. These areas need consideration within the detailed design or there is the potential to have areas of standing water in gardens and landscaped areas not positively drained if overland flow routes are not considered. Therefore, the risk of flooding from surface water flooding is Very Low but should be considered further during the detailed design.

**Surface Water (Overland flow)** – This relates to surface water entering the site. Any surface water arising from the north of the study area is likely to be intercepted by the highway drains and therefore pose no threat to the development. The flood risk associated with this source is considered Very Low.

**Groundwater** – The EA/BGS has no groundwater records for the study area. No evidence of shallow groundwater was observed during the walkover. Therefore, the flood risk associated with this source is considered Very Low.

**Sewers** – United Utilities sewer records show a combined sewer to the southwest and within Victoria Road to the south. The sewers flow away to the south; however UU mentioned records of sewer flooding within the vicinity of the site. Therefore, the flood risk associated with this source is considered Low.

**Artificial sources** – According to the EA online maps, the study area is not at risk from reservoir flooding. Therefore, the flood risk associated with this source is considered Negligible.

#### 4.3 Summary of Flood Risk

| Source of Flooding | Risk Assessment Level |
|--------------------|-----------------------|
| Fluvial            | Very Low              |
| Pluvial (Rainfall) | Very Low              |
| Surface Water      | Very Low              |
| Tidal              | Negligible            |
| Groundwater        | Very Low              |
| Sewers             | Low                   |
| Artificial Sources | Negligible            |

Table 4-1: Summary of Existing Risk Level.

The site is located within Flood Zone 1 and a Negligible to Low risk of flooding from all sources have been identified for the site. LKC therefore consider that a strategy for surface water management will be required at the site to mitigate the risk to others. The assessments of a range of measures that are feasible for the site are outlined in Section 5.

## 5 Surface Water Management

The NPPF recognises that flood risk and other environmental damage can be managed by minimising changes in the volume and rate of surface run-off from development sites through the use of Sustainable Drainage Systems (SuDS), this being complementary to the control of development within the floodplain.

SuDS will not alleviate flooding in an area prone to flooding; however, properly designed SuDS have the potential to prevent the surface water runoff from new development worsening the flood risk. The effective disposal of surface water from development is a material planning consideration in determining proposals for the development and use of land.

The accepted principles are that surface water arising from a developed area should, as far as practicable, be managed in a sustainable manner to mimic the surface water flows arising from the site prior to the proposed development, while reducing the flood risk to the site itself and elsewhere, taking climate change into account.

The Building Regulations Requirement H3<sup>7</sup> stipulates that rainwater from roofs and paved areas is carried away from the surface to discharge to one of the following, listed in order of priority:

- » an adequate soakaway or other adequate infiltration system,
- » a watercourse or, where that is not practicable,
- » a sewer.

The concept of a sustainable drainage system has been incorporated into the outline drainage strategy for the study area in order to comply with the Flood and Water Management Act 2010<sup>8</sup>.

Suitability of different SuDS will be governed by prevailing site conditions, such as the type and scale of development, topography, ground conditions (soil permeability, ground stability, depth to water table), local hydrogeology and risk of groundwater contamination (presence of sensitive aquifers and source protection zones) etc.

### 5.1 Infiltration

The Groundwater Source Protection Zone mapping from the EA website shows that the site is not within any identified protection zones.

A summary of the British Geological Survey superficial and bedrock aquifer descriptions and classifications supplemented by local records is shown in Table 5-1 below:

| Classification                        | Description                       | Aquifer Classification | Recorded Water Table Depth | Soakaway Potential |
|---------------------------------------|-----------------------------------|------------------------|----------------------------|--------------------|
| Alluvial Fan Deposits                 | Sand and Gravel                   | Secondary A            | N/A                        | Good               |
| Pennine Lower Coal Measures Formation | Mudstone, Siltstone and Sandstone | Secondary A            | N/A                        | Limited            |

Table 5-1: Geological and Hydrogeological Setting.

<sup>7</sup> Building Regulations part H3 2010: Approved Document, Drainage and Waste Disposal.

<sup>8</sup> Flood and Water Management Act 2010: UK Government.

Infiltration methods such as soakaways are likely to be feasible, but this may be investigated further at the detailed design stage.

## 5.2 Surface Water Drainage Strategy

There is a slope over the site and surrounding area which indicates that groundwater in the vicinity of the site would drain towards the southwest.

There are no observable watercourses within or near the boundary of the site. Currently surface water from the site runs overland towards the River Roch to the south.

There is a culverted watercourse adjacent to the western site boundary.

The drainage options relating to the final discharge of surface water for this section of the site are listed in Table 5-2 in order of priority within the NPPF:

| Option No: | Drainage Solution         | Most feasible solution | Comments                                                                                                                                |
|------------|---------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| a          | Soakaway/Infiltration     | 1                      | Reasoning: Likely to be feasible on account of potential permeable ground conditions.                                                   |
| b          | Connection to Watercourse | 3                      | There is a culverted watercourse to the west of the site which is feasible for discharge from the site is outside of the site boundary. |
| c          | Discharge into a sewer    | 2                      | Would be practical on account of the proximity of the public combined sewers adjacent to the site.                                      |

Table 5-2: Drainage options.

Table 5-3 provides a summary of the SuDS options appraisal with consideration of CIRIA C753 (The SUDS Manual)<sup>9</sup> for the development:

| SuDS Option           | Appropriate to Development | Comments                                                                                                                                                                                               | Benefits                                                   | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Infiltration</b>   |                            |                                                                                                                                                                                                        |                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Soakaways             | ✓                          | Due to the nature of the ground conditions, the use of infiltration systems may be feasible.                                                                                                           | Water quantity<br>Water quality                            | Soakaways provide stormwater attenuation, stormwater treatment and groundwater recharge. Runoff is treated by physical filtration to remove solids, by absorption into the soil and removal and by biochemical reactions involving micro-organisms growing on the soil.                                                                                                                                                                                                                                                                                                   |
| Infiltration basin    | ✓                          | Depressions that store and dispose of water via infiltration. May be appropriate given the ground conditions.                                                                                          | Water quantity<br>Water quality<br>Biodiversity<br>Amenity | Infiltration basin reduces the volume of runoff from a drainage area, can be very effective at pollutant removal via filtering through the soils, contributes to groundwater recharge and baseflow augmentation. Runoff is treated by physical filtration to remove solids, by absorption into the soil and removal and by biochemical reactions involving micro-organisms growing on the soil.                                                                                                                                                                           |
| Infiltration trench   | ✓                          | Infiltration trenches are shallow excavations with rubble or stone.                                                                                                                                    | Water quantity<br>Water quality<br>Amenity                 | An Infiltration trench can create temporary subsurface storage of stormwater runoff, thereby enhancing the natural capacity of the ground to store and drain water. Infiltration trenches allow water to dissipate into the surrounding soils from the bottom and sides of the trench where runoff is treated by physical filtration, adsorption and biochemical reactions involving micro-organisms growing in the soil. Infiltration trenches are easy to integrate into a site. They are ideal for use around playing fields, recreational areas or public open space. |
| Rain gardens          | *                          | Rain gardens are relatively small depressions in the ground that are planted up with native vegetation. Most likely to be implemented on private property close to buildings on relatively flat areas. | Amenity<br>Biodiversity<br>Water quality<br>Water quantity | Attractive features that can help to improve open space. Can be planned as landscaping features. Flexible layout to fit into landscape. Runoff can be treated by physical filtration to remove solids, by absorption and removal by biochemical reactions involving micro-organisms growing on the soil. They can reduce rate of run off and provide some volume reduction.                                                                                                                                                                                               |
| <b>Filtration</b>     |                            |                                                                                                                                                                                                        |                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Filter drain / trench | ✗                          | Linear trenches filled with a permeable granular material, often with a perforated pipe in the base of the trench.                                                                                     | Water quantity<br>Water quality                            | Filter trenches create temporary subsurface storage of stormwater runoff and provide stormwater treatment. These trenches can be used to filter and convey stormwater to downstream SuDS components.                                                                                                                                                                                                                                                                                                                                                                      |
| Filter strip          | ✗                          | Engineered filters that use vegetation to remove and treat runoff. The filter strip is sloped to allow sheet flow across the vegetated strip. May be appropriate given the site topography.            | Water quality<br>Amenity<br>Biodiversity                   | A filter strip offers no storage and is used solely to remove pollutants from surface water. The vegetation traps organic and mineral particles that are then incorporated into the soil, while the vegetation takes up any nutrients. A filter strip features medium amenity potential. Local wild grass and flower species can be introduced for visual interest and to provide a wildlife habitat.                                                                                                                                                                     |

Table 5-3: Summary of the SuDS options appraisal.

<sup>9</sup> CIRIA C753 - The SUDS Manual. London 2015.

| SuDS Option                      | Appropriate to Development | Comments                                                                                                                                                                                                                                                           | Benefits                                                   | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Retention &amp; Detention</b> |                            |                                                                                                                                                                                                                                                                    |                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Detention basin                  | X                          | Dry depressions designed to hold water for a specific retention time. Basins tend to be found towards the end of the SuDS management train, so are used if extended treatment of the runoff is required or if they are required for wildlife or landscape reasons. | Water quantity<br>Water quality<br>Biodiversity<br>Amenity | Detention basins provide flow control through attenuation of stormwater runoff for a wide range of rainfall events. Basins treat runoff in a variety of ways: settlement of solids in still or slow moving water, adsorption by the soil, biological activity. Basins offer many opportunities for the landscape designer. Basins should not be built on but can be used for sports and recreation. Basins can be part of public open space.                                                                                                                                                           |
| Attenuation Ponds                | X                          | Attenuation ponds can be used to offset the increase in surface water flows attributable to increased area of hard standing, in order to minimise the risk of flooding to and from the proposed development.                                                       | Water quantity<br>Water quality<br>Biodiversity<br>Amenity | Ponds will attenuate the surface water flow prior to discharging to the public surface water sewers. The storage volume afforded by these features should not include any permanent water in the pond. Ponds treat runoff in a variety of ways: settlement of solids in still water (having plants in the water enhances calm conditions and promotes settlement), adsorption by aquatic vegetation, biological activity. Permanently wet ponds can be used to store water for reuse and offer excellent opportunities for the provision of wildlife habitats. Ponds can be part of public open space. |
| Geo-cellular storage systems     | ✓                          | Modular block systems can be used to provide an underground storage facility. Any geo-cellular storage systems should be lined with a geo-membrane to provide attenuation storage.                                                                                 | Water quantity                                             | Geo-cellular systems can be used to control and manage rainwater surface water runoff either as a soakaway or as a storage tank. Geo-cellular storage systems provide high storage volume capacity High void ratios (up to 96%). Capable of managing high flow events.                                                                                                                                                                                                                                                                                                                                 |
| Oversized Pipes                  | ✓                          | Oversizing the pipes that make up the on-site drainage network is a cost-effective method for providing attenuation storage within the network. Such systems could be considered on the parts of the development where gradients are relatively flat.              | Water quantity                                             | Oversized pipes can reduce rate of run off and provide some volume reduction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Tanks                            | ✓                          | Prefabricated underground tanks could be considered at the detailed design stage in order to provide storage to attenuate surface water runoff.                                                                                                                    | Water quantity                                             | Storage tanks can be used to control and manage rainwater surface water runoff providing high storage volume capacity. Tanks are capable of managing high flow events.                                                                                                                                                                                                                                                                                                                                                                                                                                 |

Table 5-3 (continued): Summary of the SuDS options appraisal.

| SuDS Option                             | Appropriate to Development | Comments                                                                                                                                                                 | Benefits                                                   | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Swales &amp; conveyance channels</b> |                            |                                                                                                                                                                          |                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Swales                                  | *                          | Swales are shallow grass-lined channels that provide capacity for conveying flows at a controlled rate into ponds and watercourses.                                      | Water quality<br>Biodiversity<br>Amenity<br>Water quantity | Swales are effective at removing polluting suspended solids through filtration and sedimentation. The vegetation traps organic and mineral particles that are then incorporated into the soil, while the vegetation takes up any nutrients. Swales are often integrated into the surrounding land use. Local wild grass and flower species can be introduced for visual interest and to provide a wildlife habitat. Swales are usually designed as conveyance systems but can also be designed with check dams to increase attenuation and, where applicable, infiltration. |
| Channels & rills                        | *                          | Channels and rills are open surface water channels with hard edges.                                                                                                      | Water quality<br>Amenity<br>Water quantity<br>Biodiversity | Effective in water & pollution treatment. Can act as pre-treatment to remove silt before water is conveyed into further SuDS features. Can be visually appealing in urban landscapes. Amenity value for the local community and biodiversity value (design dependant).                                                                                                                                                                                                                                                                                                      |
| <b>Control structures</b>               |                            |                                                                                                                                                                          |                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Flow control devices                    | ✓                          | Flow control devices e.g. hydro-brake style flow control systems, and restricted orifices enable the discharge to be restricted to a constant rate from the development. | Water quantity                                             | Control the peak flow. Complex controls can reduce upstream storage requirements.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Inlets, outlets and controls            | ✗                          | There are many different designs and variations, including landscaped pipes, perforated pipes, weirs.                                                                    | Water quality<br>Amenity                                   | Inlets, outlets and other control structures are key elements of well-designed SuDS. Inlet and outlet features allow water to flow into and out of features and also limit the rate at which water flows along and out of the system. There are many different approaches and products available and they can be easily designed to add interest to the urban landscape. Can provide accurate flow control from one SuDS feature to another.                                                                                                                                |
| <b>Source control</b>                   |                            |                                                                                                                                                                          |                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Green roofs                             | *                          | Green roofs comprise a multi-layered system that covers the roof of a building or podium structure with vegetation cover/landscaping.                                    | Water quality<br>Water quantity<br>Amenity<br>Biodiversity | Green roof installations can help to reduce surface water runoff from roof areas depending on the system specified. Good removal capability of atmospherically deposited urban pollutants. Ecological, aesthetic and amenity benefits.                                                                                                                                                                                                                                                                                                                                      |
| Blue roofs                              | *                          | A blue roof is a roof design that is explicitly intended to store water, typically rainfall.                                                                             | Water quantity<br>Amenity<br>Biodiversity                  | Blue roofs are designed to attenuate and manage stormwater on a flat roof in urban areas where options for ground-based attenuation systems are limited, and in particular, where construction is being carried out within flood sensitive areas. Amenity value for the local community.                                                                                                                                                                                                                                                                                    |

Table 5-3 (continued): Summary of the SuDS options appraisal.

| SuDS Option                                                          | Appropriate to Development | Comments                                                                                                                                                                                                                               | Benefits                                                   | Comments                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rainwater harvesting                                                 | *                          | Rainwater harvesting collects the rain which falls onto roofs, then stores it in a tank until required for a non-potable use.                                                                                                          | Water quantity                                             | In the process, a volume of water is kept out of the storm-water management system, thereby helping to reduce flooding risks. When required, the water is pumped to the point of use, thus displacing what would otherwise be a demand for mains-water. Reduces demand on mains water. |
| Permeable Pavements – with granular and geo-cellular storage systems | ✓                          | Permeable pavements allow inflow of rainwater into underlying construction. Any geo-cellular storage systems would have to be lined with an impermeable membrane to provide storage rather than infiltration for runoff from highways. | Water quality<br>Water quantity                            | Reduced peak flows to watercourses, reducing the risk of flooding downstream. Reduced effects of pollution in runoff on the environment.                                                                                                                                               |
| <b>Other SuDS</b>                                                    |                            |                                                                                                                                                                                                                                        |                                                            |                                                                                                                                                                                                                                                                                        |
| Wetlands                                                             | X                          | These comprise of shallow ponds and marshy areas, covered almost entirely in aquatic vegetation.                                                                                                                                       | Water quality<br>Water quantity<br>Amenity<br>Biodiversity | Wetlands provide both stormwater attenuation and treatment. Wetlands detain flows for an extended period to allow sediments to settle, and to remove contaminants by facilitating adhesion to vegetation and aerobic decomposition. They also provide significant ecological benefits. |

Table 5-3 (continued): Summary of the SuDS options appraisal.

**Notes**

- ✓ Suitable for use given the nature and scale of the development
- \* Possibly suitable for use – not included in the client and architect design proposal at present
- X Not suitable

### 5.3 Surface Water Attenuation Requirements

From correspondence with the UU the flow should be limited to a 'brownfield scenario' for estimating the attenuation volumes required.

It is estimated from the supplied plan (see Appendix A) that the site will have the following designated areas (Table 5-4). Table 5-4 shows the assumed split in area included within the calculations.

| Existing Areas         | Plot Area |
|------------------------|-----------|
| Total area (ha)        | 0.42      |
| Impermeable Split (ha) | 0.42      |
| Permeable Split (ha)   | 0.00      |
| Proposed Areas         | Plot Area |
| Total area (ha)        | 0.42      |
| Impermeable Split (ha) | 0.42      |
| Permeable Split (ha)   | 0.00      |

Table 5-4: Assumed plot areas.

#### 5.3.1 Infiltration Storage Estimate

It is possible that this area maybe drained via infiltration-based SuDS following further testing.

Typical k Values from 'Environmental Geotechnics' (Sarsby)<sup>10</sup> suggests that a value of  $1 \times 10^{-5} \text{m/s}$  is typical given that the area is underlain by Sand and Gravel.

As a result of these figures the volume of the required infiltration basin has been estimated using CIRIA Report 156<sup>11</sup> / BRE365<sup>12</sup> and is shown in Appendix E. This assumes a safety factor of 2. For an infiltration rate of  $1 \times 10^{-5} \text{m/s}$ , for example a width of 10m, a length of 20m and a depth of 1m creates the required total storage volume of **199.2m<sup>3</sup>**. This volume can readily be achieved within the site boundary.

#### 5.3.2 Attenuation Estimate

For the contributing catchment an estimate has been produced assuming a developable area of 0.42ha, of which 50% is permeable. This gives the following runoff rates and attenuation requirements for this section based on the Wallingford method:

|                              |           |
|------------------------------|-----------|
| » $Q_{\text{bar}}$ :         | 49.8 l/s  |
| » 1 in 1-year runoff rate:   | 35.6 l/s  |
| » 1 in 30-year runoff rate:  | 87.2 l/s  |
| » 1 in 100-year runoff rate: | 110.0 l/s |

All runoff estimates and subsequent storage estimates are included in Appendix E.

The following attenuation has been estimated for the development assuming an estimated flow limited to 5l/s to the sewer and utilises the FSR methodology<sup>13</sup> as:

<sup>10</sup> Environmental Geotechnics 2<sup>nd</sup> Edition – Sarsby 2013.

<sup>11</sup> Infiltration drainage, Manual of good practice (R156). 1996. <sup>12</sup> Soakaway Design - BRE DIGEST 365, 1991.

<sup>13</sup> Flood Studies Report Wallingford NERC 1975.

- Attenuation storage volume: **31.1 m<sup>3</sup>** (1 in 30-year event)
- Retention on site volume: **63.7 m<sup>3</sup>** (1 in 100 year + 20% Climate Change)
- Retention on site volume: **80.4 m<sup>3</sup>** (1 in 100 year + 40% Climate Change)

Attenuation storage aims to limit the peak rate of runoff from the development to the corresponding runoff for a range of annual flow rate probabilities before discharge to watercourse. As the flow from the development would be restricted to the brownfield equivalent there should be little change in the flows that enter the unnamed watercourse and thus the risk of flooding and the level of erosion created as a result from the development should not increase the risk of flooding off-site.

The attenuation required for a 1 in 30-year storm event, requires a storage volume of **31.1 m<sup>3</sup>** and for the 1 in 100-year event, a storage capacity of between **63.7 m<sup>3</sup>** and **80.4 m<sup>3</sup>** will be required from on-site storage as well as SuDS systems. All volumes can be stored within the site boundary and discharges will be limited by flow control devices to the adjacent sewer.

The use of permeable paving may be viable dependant on the detailed design of the proposed development. If this drainage technique is considered to be feasible then it will reduce the requirement for attenuation as it will reduce the contributing area.

Assuming that the outline drainage strategy is acceptable to the Local Authority, a more detailed design can be presented and agreed with the appropriate regulatory bodies during the detailed design phase.

#### **5.4 Site Specific SuDS**

Infiltration facilities may be feasible giving likely permeable ground conditions. An infiltration facility will provide a significant volume of storage and contribute to surface water treatment via filtering through the soils. Infiltration facility will also contribute to groundwater recharge and baseflow augmentation (subsurface storage).

The use of permeable paving may be viable dependant on the detailed design of the proposed development. If this drainage technique is considered to be feasible then it will reduce the requirement for attenuation as it will reduce the contributing impermeable area. The permeable paving will also provide some level of water treatment reducing effects of pollution in runoff on the environment.

Assuming that the outline drainage strategy is acceptable to the Local Authority, a more detailed design can be presented and agreed with the appropriate regulatory bodies during the detailed design phase.

#### **5.5 Foul Drainage**

United Utilities have stated that foul discharge will be allowed to drain to the public combined sewer at an unrestricted rate and a convenient point.

## **6 Mitigation Measures**

### **6.1 Proposed Site levels and Developments Level**

Current Environment Agency guidance recommends that the minimum ground floor levels of residential developments are set at a nominal height above the 1% annual probability (1 in 100 year) flood level including an additional fluvial allowance for climate change. It is generally accepted that vehicle parking can be accommodated within the flood zone with suitable safeguards. The 'design' flood level for the site should therefore be the 1% annual probability event with allowance for climate change plus an allowance for freeboard.

This and the 0.1% annual probability (1 in 1000-year) are significantly below the lowest existing ground level measured on site by approximately. On this basis the finished floor levels (FFL) should be set at a nominal height above the finalised ground levels to allow for any overland flow from a drainage failure. No further mitigation measures are therefore recommended.

### **6.2 Safe Access**

Safe and dry access is available via Brown Street to the west, significantly above the 1% annual probability event. Therefore, no mitigation is proposed.

### **6.3 Flood Resistance and Resilience**

The development proposed may be subject to flooding at more extreme events than those considered. However, the risk appears to be sufficiently low that flood resilience measures need not be included into ground floor construction to aid recovery after any event. If utilised, typical measures would include solid floors, use of suitable materials and services fed from upper floors with outlets at high level. The need can be discussed and agreed with building control officers during detailed design.

### **6.4 Residual Risk**

It is impossible to completely guard against flooding since extreme events greater than the design standard event are always possible. However, it is likely that with the 1% annual probability flood event with allowance for climate change significantly below the lowest site levels, the relatively elevated position of the development will safeguard it from localised fluvial flooding during extreme rainfall events and fluvial flooding events outside the scope of this assessment. However, ground floor levels should be set above proposed levels across the site and provide a nominal freeboard to allow overland flow under exceptional conditions. Overland flow routes should be considered in case of drainage failure and the extreme events.

This page has been left  
blank intentionally

## 7 Conclusions

The site is shown on published mapping to be located within the Environment Agency's Flood Zone 1. Comparison of topographical data with the EA modelled flood level data indicates that the whole site is in Flood Zone 1 – Very Low Risk of fluvial flooding.

Negligible to Low risks of flooding from all sources have been identified from information provided by the EA, Rochdale Council and United Utilities.

An assessment of these risks in conjunction with the development proposals have resulted in the following recommendations for the safe development of the site:

- » The finished floor level should be set at a nominal height above the finished ground levels to allow for overland flow routes in extreme events and drainage failures.
- » Pedestrian and vehicular safe access to and from the site is achievable under all conditions via the access road off Brown Street.
- » There is potential for soakaway use for rainwater disposal; however, this should be investigated further at the detailed design phase
- » Surface water flow will probably need to be attenuated to 5l/s or as agreed with United Utilities and the LLFA.
- » Surface water discharge into the culvert to the west of the site would be dependent on third party access.
- » Proposed SuDS should be selected to provide a wide range of benefits including amenity, biodiversity and maintaining water quality where practical. During construction, adequate measures should be proposed to control pollution to existing watercourses and groundwater.
- » A formal evacuation plan is not considered to be required.


Further details on the proposed mitigation measures are provided in Section 6. All proposed measures should be agreed with the Local Authority prior to commencement of the development.


This page has been left  
blank intentionally

# **Appendix A**

## **Figures, Plans and Drawings**

This page has been left  
blank intentionally

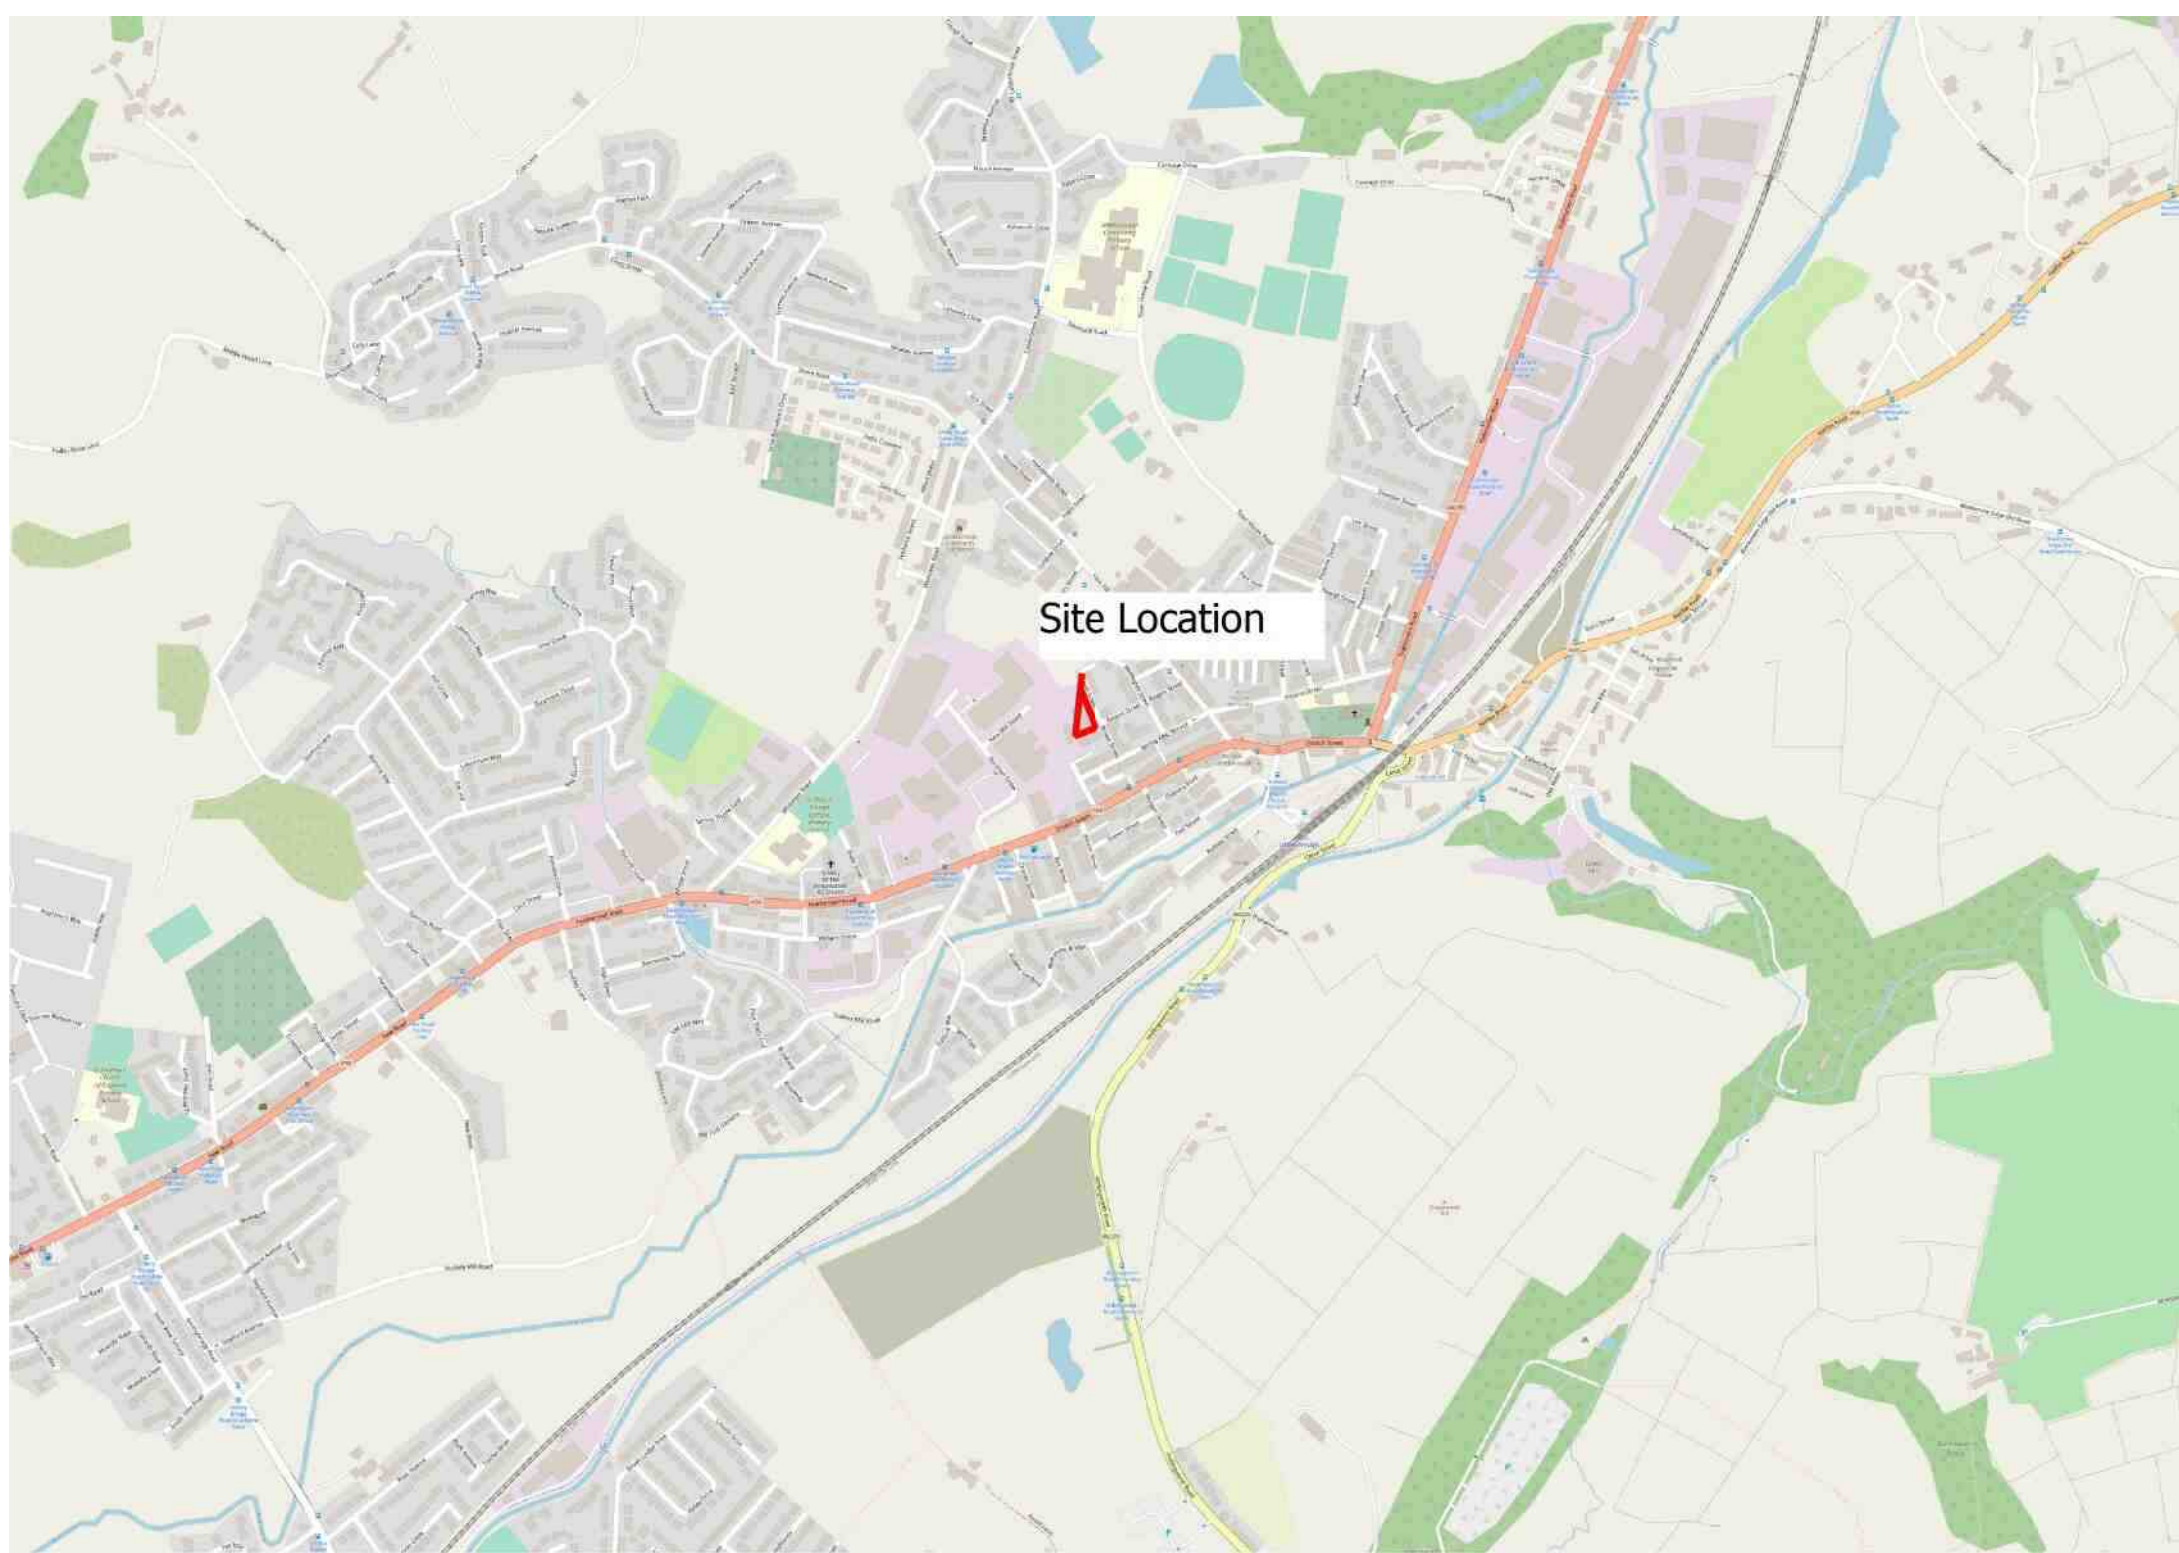

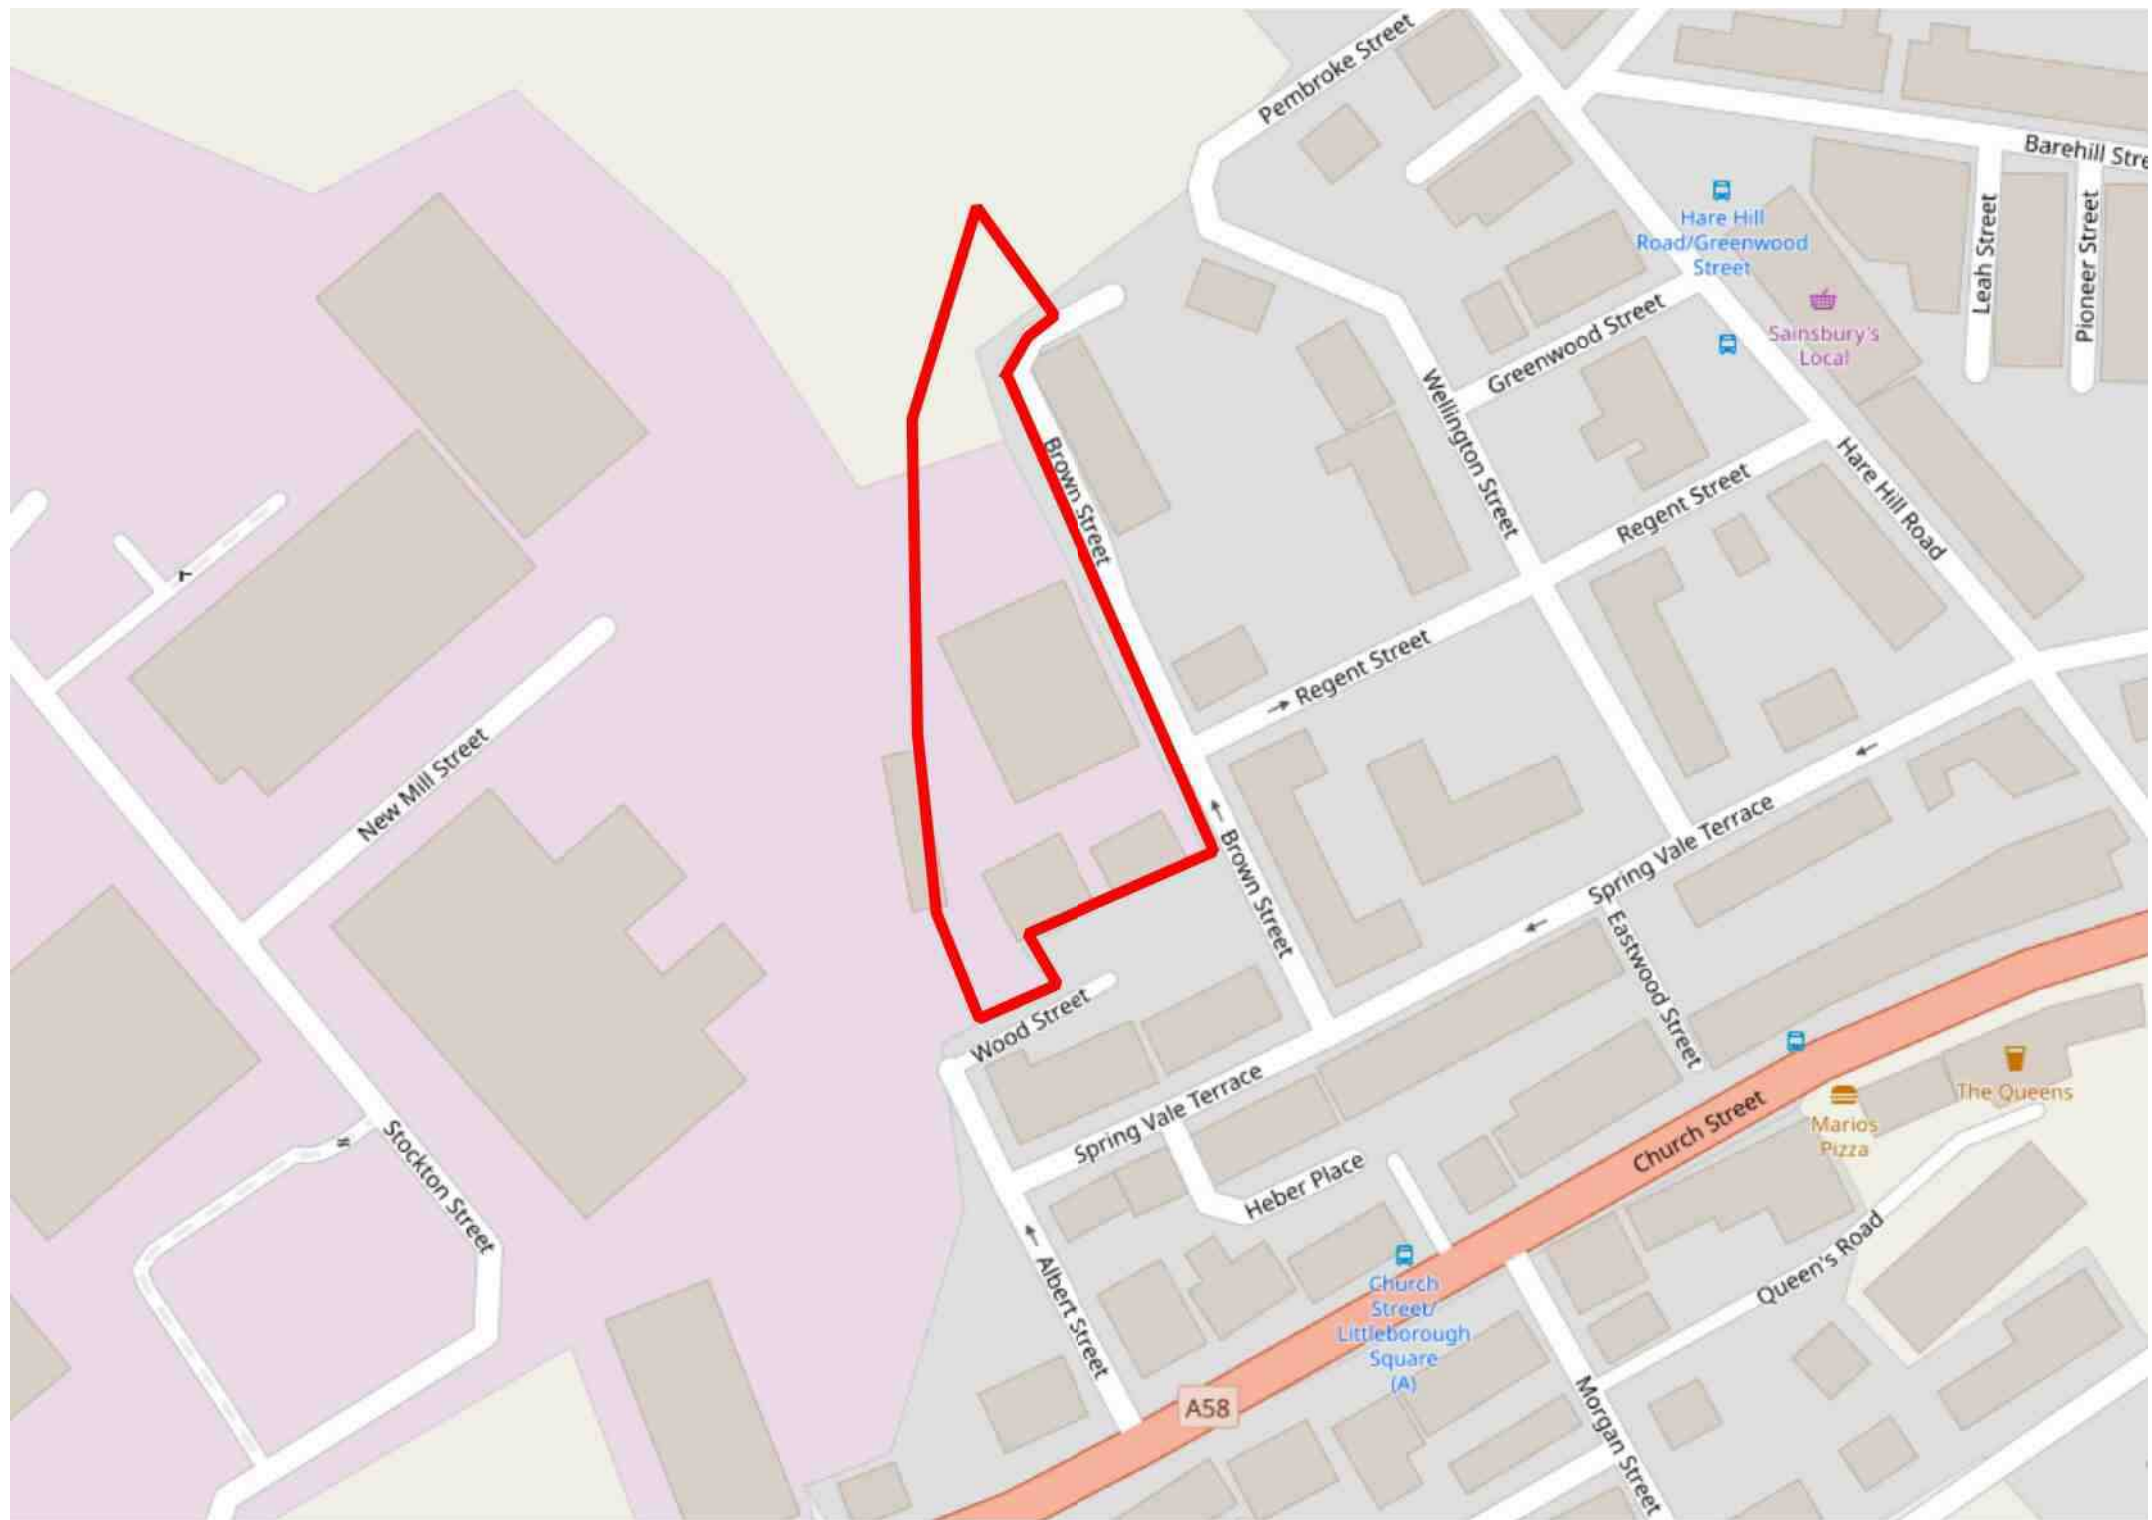

## **Appendix B**

### **Site Information**

This page has been left  
blank intentionally

# Flood map for planning

Your reference  
<Unspecified>

Location (easting/northing)  
393520/416411

Created  
2 Apr 2020 15:23

**Your selected location is in flood zone 1, an area with a low probability of flooding.**

## This means:

- you don't need to do a flood risk assessment if your development is smaller than 1 hectare and not affected by other sources of flooding
- you may need to do a flood risk assessment if your development is larger than 1 hectare or affected by other sources of flooding or in an area with critical drainage problems

## Notes

The flood map for planning shows river and sea flooding data only. It doesn't include other sources of flooding. It is for use in development planning and flood risk assessments.

This information relates to the selected location and is not specific to any property within it. The map is updated regularly and is correct at the time of printing.

The Open Government Licence sets out the terms and conditions for using government data.  
<https://www.nationalarchives.gov.uk/doc/open-government-licence/version/3/>



## Flood map for planning

Your reference  
<Unspecified>

Location (easting/northing)  
**393520/416411**


Scale  
**1:2500**

Created  
**2 Apr 2020 15:23**

-  Selected point
-  Flood zone 3
-  Flood zone 3: areas benefitting from flood defences
-  Flood zone 2
-  Flood zone 1
-  Flood defence
-  Main river
-  Flood storage area

0 20 40 60m

 High
 Medium
 Low
 Very low

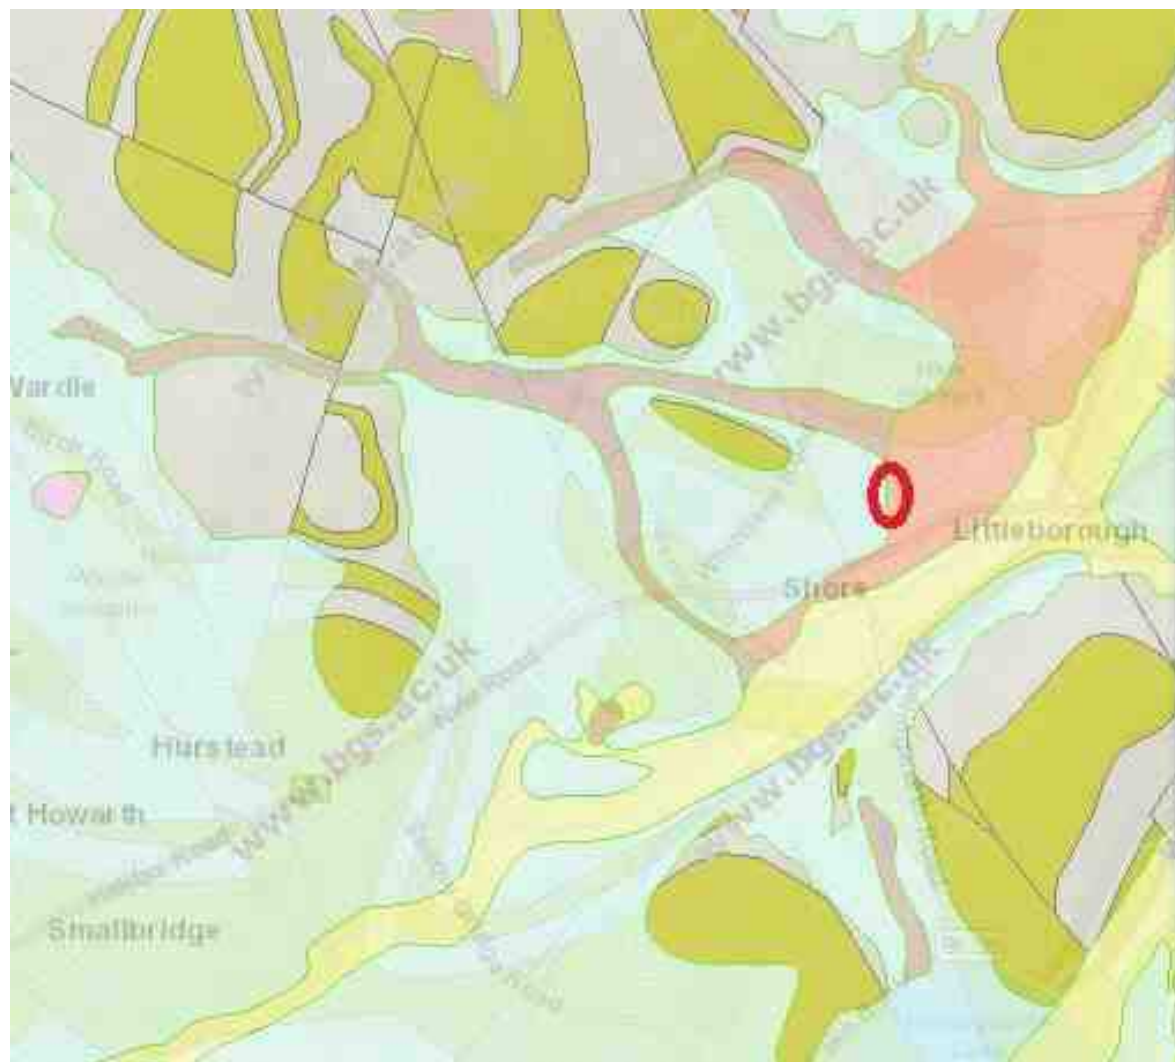

Map Key (close this window to activate map) x


1:50 000 scale geology

### Superficial deposits

-  ALLUVIUM - CLAY, SILT, SAND AND GRAVEL
-  GLACIOFLUVIAL DEPOSITS, DEVENSIAN - SAND AND GRAVEL
-  TILL, DEVENSIAN - DIAMICTON
-  ALLUVIAL FAN DEPOSITS - SAND AND GRAVEL
-  HEAD - DIAMICTON
-  HEAD - CLAY, SILT, SAND AND GRAVEL
-  PEAT - PEAT
-  TALUS - ROCK FRAGMENTS, ANGULAR, UNDIFFERENTIATED SOURCE ROCK

### Bedrock geology

-  DARWEN FLAGS - SANDSTONE

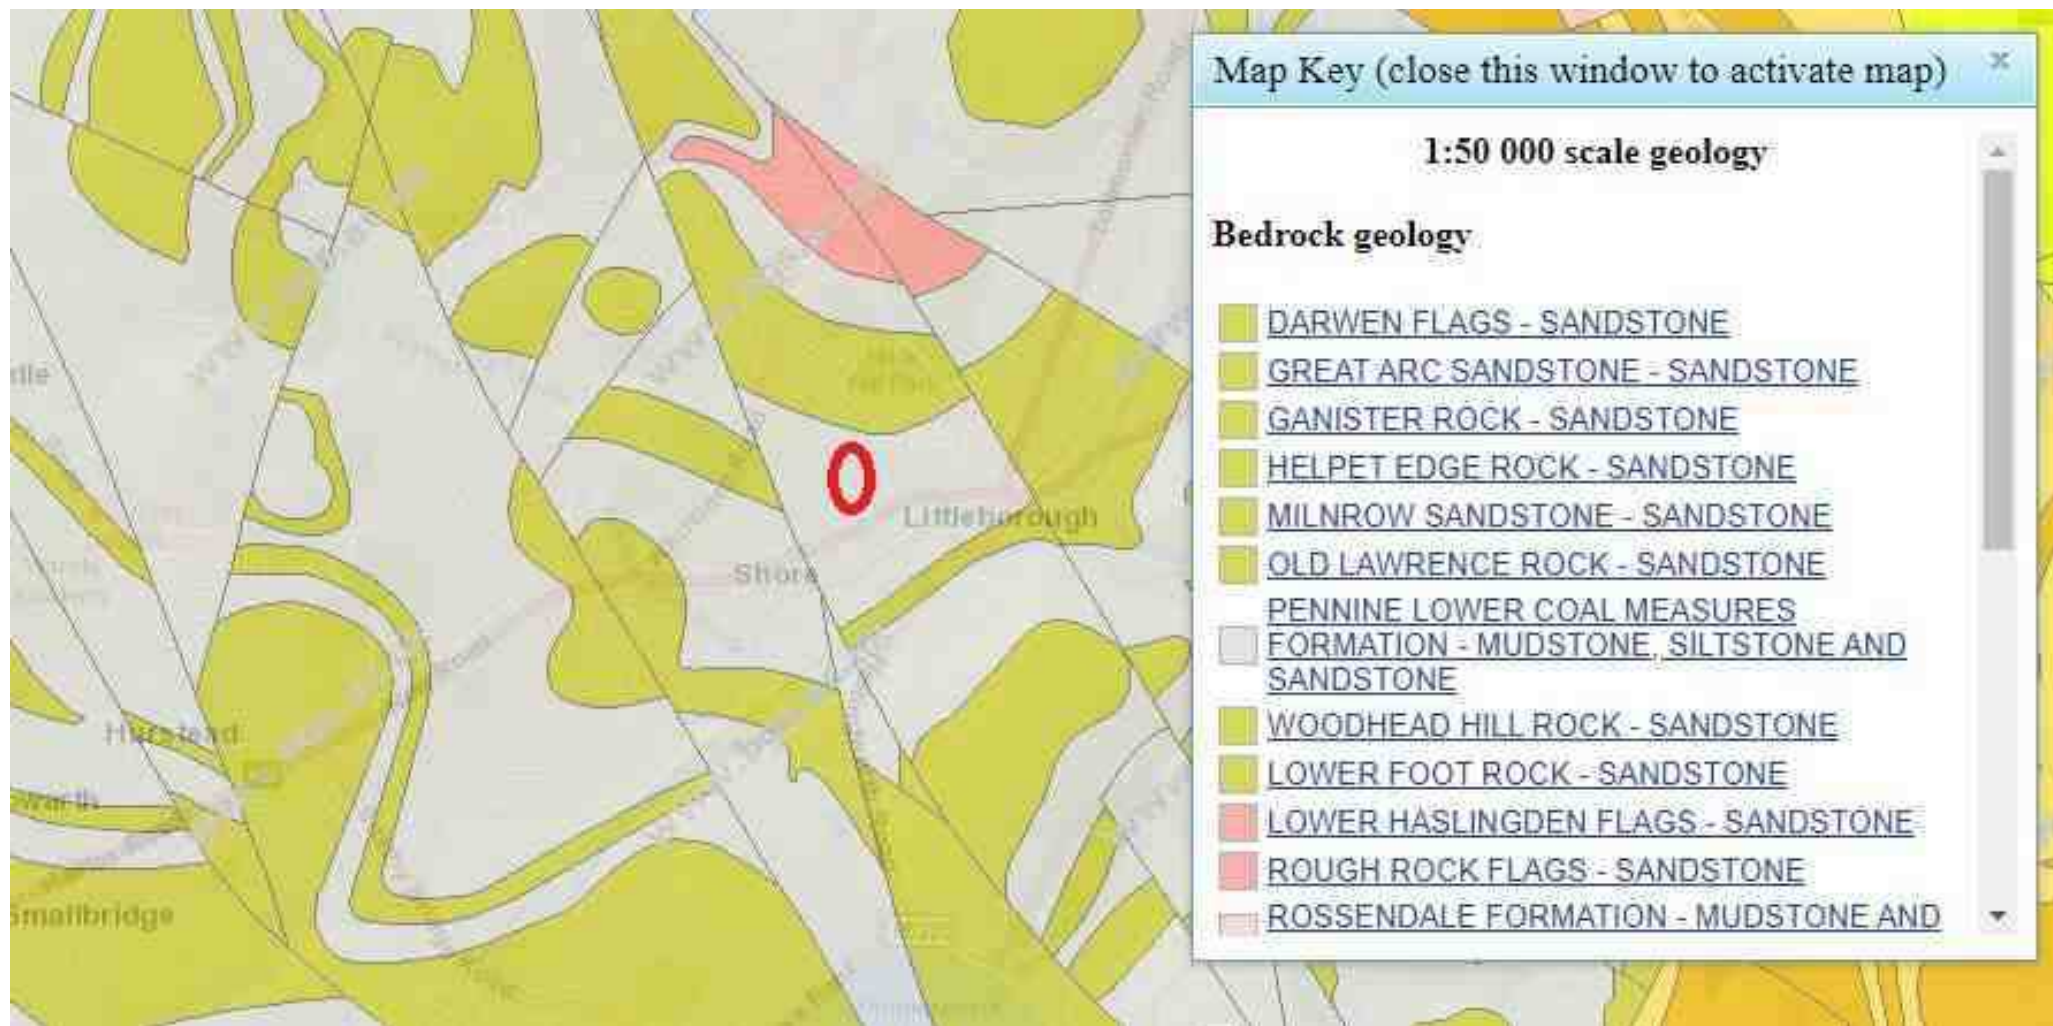

RECORD OF WELL (SHAFT OR BORE)

1" N.S. 76

1" O.S.

Grid  
Ref.

13

At Breda British Visade Ltd., Rython Mill,  
Town or Village Littleborough County Lancs.Six-inch quarter sheet 81 SWExact site \_\_\_\_\_ } (A rough sketch-map  
\_\_\_\_\_ } or a tracing from a  
\_\_\_\_\_ } map is very desirable)Level of ground surface above sea-level (O.D.) c 470 ft. If well starts below ground surface, state how far \_\_\_\_\_ ft.Shaft \_\_\_\_\_ ft., diameter \_\_\_\_\_ ft. Bore \_\_\_\_\_ ft. Diameter of bore: at top \_\_\_\_\_ ins.; at bottom 24 ins.Details of permanent lining tubes (internal diameters preferred) Tubed to 123'6" with 24 1/2" diameter  
tubes.

Water struck at depths of (feet) \_\_\_\_\_

Rest-level of water below top of well of \_\_\_\_\_ feet. Suction at \_\_\_\_\_ feet. Yield on \_\_\_\_\_ hours' test  
above \_\_\_\_\_ days' test

\_\_\_\_\_ gallons per \_\_\_\_\_ (with pump of capacity \_\_\_\_\_ g.p.h.); depressing water level to \_\_\_\_\_ feet

below top. Time of recovery \_\_\_\_\_ hrs. Amount normally pumped daily \_\_\_\_\_ g.p.h. for \_\_\_\_\_ hours.

Quality (attach copy of analysis if available) \_\_\_\_\_

Sunk by Messrs. T. Matthews for Mr. British Visade Ltd., Date of well 1929Information from Messrs. Thomas Matthews, Pendleton, Manchester.(For Survey use only).  
GEOLOGICAL  
CLASSIFICATION.E.C. 18/9/29  
NATURE OF STRATA  
(and any additional remarks).

THICKNESS

DEPTH

Feet. Inches.

Feet. Inches.

Made ground  
 Grey sand and gravel  
 Sand and gravel  
 Clay and sand  
 Gravel with boulders  
 Sand and gravel  
 Red sand and gravel  
 Grey sand and gravel  
 Red sand  
 Sand gravel and boulders  
 Clay gravel and boulders  
 Grey shale  
 Black shale  
 Hard shale  
 Shale  
 Black shale  
 Black shale and coal  
 Black shale and nodules  
 Hard black shale  
 Coal  
 Black shale  
 Hard grey gritstone  
 Grey grits  
 Hard grey gritstone  
 Grey grit  
 Grey grit  
 Hard grey grit  
 Grey grit

12 6

12 6

2 3

14 9

14 9

39 6

2 6

32 -

7 6

39 6

3 6

43 -

7 -

50 -

23 3

73 3

6 9

80 -

32 3

112 3

9 3

121 6

14 6

136 -

6 6

142 6

1 -

143 6

2 -

145 6

5 6

151 -

5 -

156 -

16 -

172 -

28 -

200 -

3 -

203 -

3 -

206 -

5 6

211 6

- 6

212 -

6 -

218 -

4 -

222 -

70 -

292 -

1 -

293 -

33 6

326 6

Geological Survey

SD 91 NW/7  
County

6" Quarter Sheet

| THICKNESS     |    | DEPTH         |    |
|---------------|----|---------------|----|
| Feet. Inches. |    | Feet. Inches. |    |
| metric        |    | metric        |    |
| 3             | 81 | 3             | 81 |
| 0             | 69 | 4             | 50 |
| 4             | 49 | 8             | 99 |
| 0             | 76 | 9             | 75 |
| 2             | 29 | 12            | 04 |
| 1             | 07 | 13            | 11 |
| 1             | 23 | 15            | 24 |
| 7             | 09 | 22            | 33 |
| 2             | 05 | 24            | 38 |
| 9             | 83 | 34            | 21 |
| 2             | 82 | 37            | 03 |
| 4             | 42 | 41            | 45 |
| 1             | 98 | 43            | 43 |
| 0             | 31 | 43            | 74 |
| 0             | 61 | 44            | 35 |
| 1             | 63 | 46            | 03 |
| 1             | 52 | 47            | 55 |
| 4             | 88 | 52            | 43 |
| 8             | 53 | 60            | 96 |
| 0             | 91 | 61            | 87 |
| 0             | 91 | 62            | 79 |
| 1             | 68 | 64            | 47 |
| 0             | 15 | 64            | 62 |
| 1             | 83 | 66            | 45 |
| 1             | 22 | 67            | 67 |
| 21            | 33 | 89            | 00 |
| 0             | 31 | 89            | 31 |
| 10            | 21 | 99            | 52 |

W.B. Yielded up to 25,000 g.p.h. with submersible pump, pumping water level 80' below well top. Water normally overflows. Hardness said to be 13-15° Hardness min. free.

No longer in use owing to closure of factory. Water O.F.

Visited and filled bottle. 4-56.

For Survey use only

GEOLOGICAL SURVEY AND MUSEUM.  
 SOUTH KENSINGTON,  
 LONDON, S.W.7.

|               |                        |                                    |
|---------------|------------------------|------------------------------------|
| Date received | G.S.M. Office File No. | Site marked on 1" map (use symbol) |
|---------------|------------------------|------------------------------------|

British Geological Survey



**Photograph 1 (facing W):**  
Access off Brown Street.



**Photograph 2 (facing W):**  
Self-storage unit area.



**Photograph 3 (facing N):**  
Former works building.  
Limited areas of  
hardstanding adjacent to  
the building.



**Photograph 4 (facing N):**  
Site is sloping to the north.  
View of the sharp drop  
adjacent to the western  
boundary.



**Photograph 5 (facing S):**  
View of works building and  
adjacent area.



**Photograph 6 (facing SE):**  
Honksford Brook adjacent  
to former silk mill buildings  
showing half round  
channel.



**Photograph 7 (facing W):**  
Public footpath running adjacent to the western boundary at lower level than the site.



**Photograph 8 (facing W):**  
Gravel car park present adjacent to the north of the building. Downpipes observed to drain into underground drainage system.



**Photograph 9 (facing N):**  
Car park as above and Brown Street on the right-hand side.



**Photograph 10 (facing SE):**  
View of manhole in Brown Street.



**Photograph 11 (facing E):**  
View of manhole in Brown Street.



**Photograph 12 (facing NW):**  
Soft ground area in the north adjacent to Brown Street.



**Photograph 13 (facing NW):**  
Public footpath adjacent to north of the site.



**Photograph 14 (facing S):**  
View of rough area in the north of the site. Steep slope towards the west present on the eastern boundary.



**Photograph 15 (facing NW):**  
Presence of culverted watercourse manhole northwest of the site at few meters below site levels.


This page has been left  
blank intentionally

## **Appendix C**

### **Environment Agency Data**

This page has been left  
blank intentionally

Detailed Flood Map centred on Brown Street, Littleborough, OL15 8BW. Created on 19/02/2020 [GMMC161228AB]

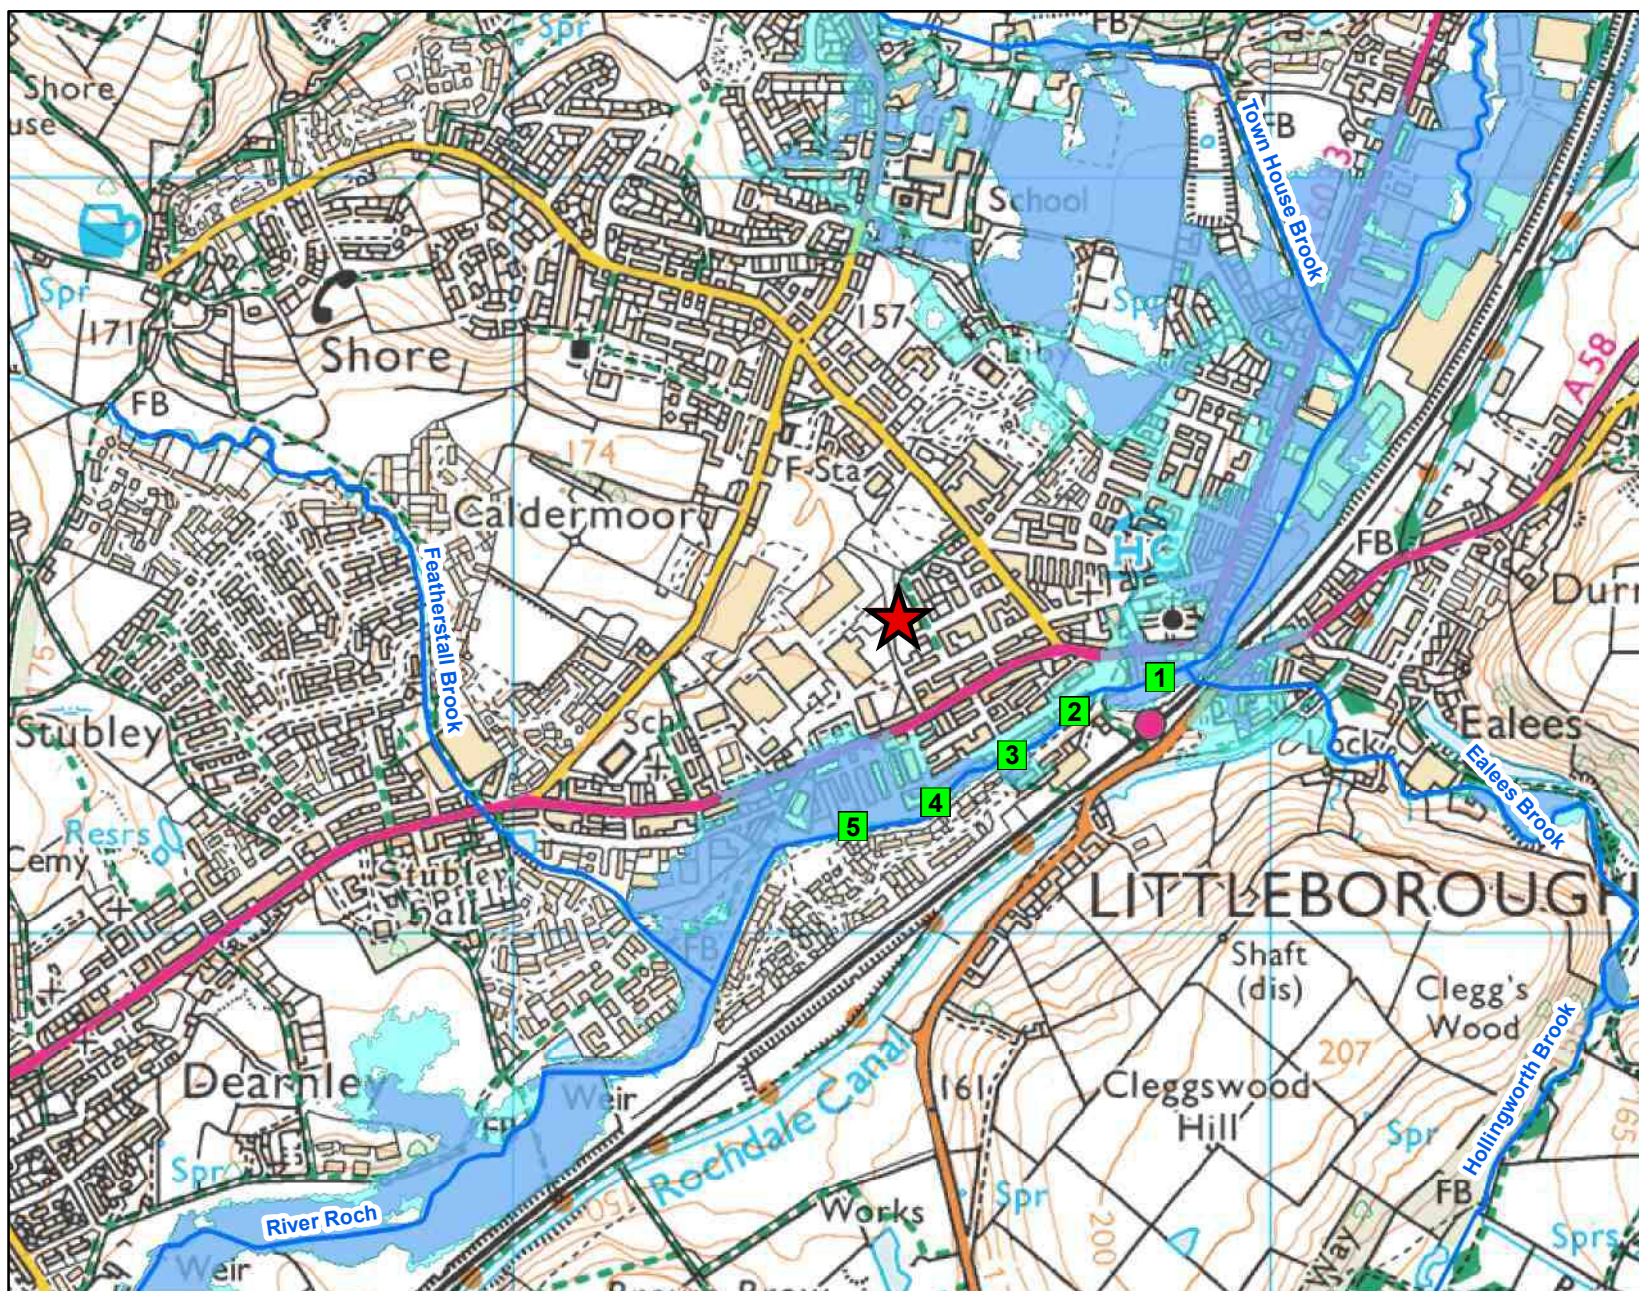

1:10,001



### Legend



Site Location



Model Measurements



Main River



Flood Zone 3 Fluvial



Flood Zone 2 Fluvial

Notes: \*Climate Change Scenario - 35% and 70% increases in flow calculated for the 2080's (2070 - 2115). Please see <https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances> for more information regarding the new climate change guidance. The location of the site and the type (vulnerability) of development determine the climate change allowances to consider in any flood risk assessment.

## Matthew Craig

---

**From:** GMMC Info Requests <InfoRequests.GMMC@environment-agency.gov.uk>  
**Sent:** 25 February 2020 11:39  
**To:** Matthew Craig  
**Subject:** GMMC161228AB Response attached from the Environment Agency  
**Attachments:** GMMC161228AB\_DFM.PDF; GMMC161228AB\_P4.pdf; GMMC161228AB\_Res.pdf; Reservoir Flood Map Attachment.pdf; CCA - GMMC Area External Guidance v5.pdf

Dear Matthew,

Thank you for your enquiry which was received on 11/2/20.

We respond to requests under the Freedom of Information Act 2000 and Environmental Information Regulations 2004.

I enclose the data requested.

We have no record of flooding affecting this site. However, this does not mean flooding has not occurred in the past or that it will not flood in future. We recommend that you also contact United Utilities and Rochdale Metropolitan District Authority who may hold additional information (the former especially in relation to sewer flooding).

There are no flood defences within the vicinity of the site.

From April 2015 Lead Local Flood Authorities became the statutory consultee for surface water flood risk in relation to planning applications. They are now the appropriate body to assess applicants/developers surface water drainage proposals and the Local Planning Authority should consult the LLFA as necessary during determination of applications.

On 12th September 2014 Defra published a new consultation on delivering SuDS. The consultation document set out an alternative approach to the one envisaged in the Flood & Water Management Act 2010. The proposals dropped all the key provisions of Schedule 3 and the idea of establishing SuDS Approval Boards (SABs). The alternative approach was adopted and a written statement made on 18th December 2014 to Parliament:- <https://www.gov.uk/government/speeches/sustainable-drainage-systems>. The alternative approach sets out an expectation that "major developments" should incorporate SuDS designs. The supporting "Non Statutory Technical Standards for SuDS was also issued in March 2015":- <https://www.gov.uk/government/publications/sustainable-drainage-systems-non-statutory-technical-standards>. It is no longer the EAs role to comment on the suitability of a developer's surface water drainage design as to whether it meets the National Planning Policy Framework, Non-Statutory Standards, the Council's policies or any relevant SFRA requirements. If the LLFA wishes to consult us as part of their SuDS design assessment (i.e. if discharge is proposed direct to a "main river") this can be done directly with the EA's PSO Team here. Accordingly, if you have not already done so, we recommend you discuss your surface water drainage proposals directly with the LLFA. This development may require a permit under the Environmental Permitting (England and Wales) Regulations 2010 from the Environment Agency for any proposed works or structures, in, under, over or within eight metres of the top of the bank of a watercourse, designated a 'main river'. This was formerly called a Flood Defence Consent. Some activities are also now excluded or exempt. A permit is separate to and in addition to any planning permission granted. Further details and guidance are available on the GOV.UK website: <https://www.gov.uk/guidance/flood-risk-activities-environmental-permits>.

Flood risk from surface water can be found at <https://flood-warning-information.service.gov.uk/long-term-flood-risk/map>

Please be aware you can check your risk of flooding on our external website <https://flood-warning-information.service.gov.uk/long-term-flood-risk/>

Please also note that all current EA flood risk strategy documents can be found on our external website <https://www.gov.uk/guidance/flood-risk-assessment-local-planning-authorities> and <https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances>

Please refer to the [Open Government Licence](#) which explains the permitted use of this information.

Please get in touch if you have any further queries or contact us within two months if you'd like us to review the information we have sent.

Kind regards,

Anne Ball  
Customer and Engagement Officer  
**Greater Manchester, Merseyside and Cheshire**  
**External:** 020 302 51232  
**Mobile:** 07769285094  
**Email:** [Inforequests.gmmc@environment-agency.gov.uk](mailto:Inforequests.gmmc@environment-agency.gov.uk)

Information in this message may be confidential and may be legally privileged. If you have received this message by mistake, please notify the sender immediately, delete it and do not copy it to anyone else. We have checked this email and its attachments for viruses. But you should still check any attachment before opening it. We may have to make this message and any reply to it public if asked to under the Freedom of Information Act, Data Protection Act or for litigation. Email messages and attachments sent to or from any Environment Agency address may also be accessed by someone other than the sender or recipient, for business purposes.

## **Appendix D**

### **Consultee Correspondence**

This page has been left  
blank intentionally

## Matthew Craig

---

**From:** Wastewater Developer Services <WastewaterDeveloperServices@uuplc.co.uk>  
**Sent:** 24 February 2020 14:46  
**To:** Matthew Craig  
**Cc:** Wastewater Developer Services  
**Subject:** 4200030340 - Pre-Development Enquiry - Brown Street, Littleborough  
**Attachments:** 3142 01 A Location Plan.pdf; United Utilities - wastewater development.docx

Dear Matthew,

### Our reference for this pre-development enquiry: 4200030340

We have carried out an assessment of your application which is based on the information provided; this pre development advice will be valid for 12 months

### Records of historic flooding:

I can confirm that we do have current records of sewer flooding on our DG5 register within the vicinity of the proposed development. The DG5 register is a register of properties that have flooded as a result of hydraulic inadequacy of the public sewer network.

Please note that United Utilities Water Limited (U UW) can only record and check flooding events which are reported to us and we have to comply with our Regulators instructions on the qualification of flooding events to place on the register.

Our response does not include:

- any sewer flooding events caused by blockages or collapses which are the result of third party actions, natural events or other actions over which U UW has no control and not a facet of sewer capacity; or
- any historical sewer flooding events that have been removed from the register as a result of investment in our infrastructure.

### Foul

Foul will be allowed to drain to the public combined sewer network at an unrestricted rate, and at any convenient point.

### Surface Water

In order to follow the drainage heirachy outlined in Building Regulations part H3 and National Planning Practice Guidance (NPPG), surface water should be drained via infiltration systems/soakaways wherever possible.

Please note, where ground conditions could potentially allow for an infiltration-based drainage strategy, we would expect to see percolation test results in line with BRE Digest 365.

If infiltration proves to be infeasible, surface water must connect to the culverted watercourse to the West of the site (running roughly North to South).

### General Information:

Please be aware that on site drainage must be designed in accordance with Building Regulations, National Planning Policy, and local flood authority guidelines, we would recommend that you speak and make suitable agreements with the relevant statutory bodies.

#### Connection Application

Although we may discuss and agree discharge points & rates in principle, please be aware that you will have to apply for a formal sewer connection. This is so that we can assess the method of construction, Health & Safety requirements and to ultimately inspect the connection when it is made. Details of the application process and the form itself can be obtained from our website by following the link below

<http://www.unitedutilities.com/connecting-public-sewer.aspx>

#### Trade Effluent

If you intend to discharge trade effluent to the public sewer you will require a trade effluent permit. Please see United Utilities' website for details.

<https://www.unitedutilities.com/wholesale-services/trade-effluent/>

Many thanks and kind regards,

Tom



**Thomas Bethell**  
Assistant Engineer  
Developer Services & Metering  
Customer Services  
T: 01925 679 308  
[unitedutilities.com](http://unitedutilities.com)

**If you have received a great service today why not tell us?**

**Visit: [unitedutilities.com/wow](http://unitedutilities.com/wow)**

---

**From:** Matthew Craig [<mailto:m.craig@thelkgroup.com>]

**Sent:** 11 February 2020 16:34

**To:** Wastewater Developer Services <[WastewaterDeveloperServices@uuplc.co.uk](mailto:WastewaterDeveloperServices@uuplc.co.uk)>

**Subject:** FRA query - Brown Street, Littleborough

Dear Sir/Madam

LK Consult Ltd. has been commissioned to undertake a Flood Risk Assessment (FRA), for land at Brown Street, Littleborough, OL15 8BW

Centred at approximate National Grid Reference 393519E, 416433N.

The area of interest appears to be in Flood Zone 1.

To complete the FRA we would be grateful if you could supply us with the following, if available, for the vicinity of the site:

- Records of any historic flood events and potential sources of flooding from foul and surface water sewers on site and in the area.
- Any restrictions to discharge into the sewers

If you have any queries please get in touch with me.

We are, of course, happy to pay your reasonable charge for this service. Please let me know by return what information is available and what the charge will be and we will pay the relevant fees by debit card as soon as possible.

Any advice or recommendations you may have regarding the potential discharges from the development of this site?

We will be in contact with all other relevant authorities to get a more complete understanding of the issues in the area.

Regards

Matthew Craig



Matthew Craig  
Environmental Scientist – Flood Risk  
LK Consult | 0161 763 7200 |  
Manchester | London | Liverpool | Glasgow |  
[www.thelkgroup.com](http://www.thelkgroup.com)

I N C R E A S I N G L A N D V A L U E

EMGateway3.uuplc.co.uk made the following annotations

-----  
The information contained in this e-mail is intended only for the individual to whom it is addressed. It may contain legally privileged or confidential information or otherwise be exempt from disclosure. If you have received this Message in error or there are any problems, please notify the sender immediately and delete the message from your computer. You must not use, disclose, copy or alter this message for any unauthorised purpose. Neither United Utilities Group PLC nor any of its subsidiaries will be liable for any direct, special, indirect or consequential damages as a result of any virus being passed on, or arising from the alteration of the contents of this message by a third party.

United Utilities Group PLC, Haweswater House, Lingley Mere  
Business Park, Lingley Green Avenue, Great Sankey,  
Warrington, WA5 3LP  
Registered in England and Wales. Registered No 6559020

[www.unitedutilities.com](http://www.unitedutilities.com)  
[www.unitedutilities.com/subsidiaries](http://www.unitedutilities.com/subsidiaries)  
-----

LKGroup

Unit 29, Eton Business Park  
Eton Hill Road,  
Radcliffe, Greater Manchester  
M26 2ZS

FAO:

**How to contact us:**

**United Utilities Water Limited  
Property Searches  
Haweswater House  
Lingley Mere Business Park  
Great Sankey  
Warrington  
WA5 3LP**

**Telephone: 0370 7510101**

**E-mail: [propertysearches@uuplc.co.uk](mailto:propertysearches@uuplc.co.uk)**

**Your Ref: FRA 20 1133  
Our Ref: UUPS-ORD-154834  
Date: 03/03/2020**

**Dear Sirs**

**Location: Brown Street Littleborough**

I acknowledge with thanks your request dated 03/03/2020 for information on the location of our services.

Please find enclosed plans showing the approximate position of United Utilities' apparatus known to be in the vicinity of this site.

The enclosed plans are being provided to you subject to the United Utilities terms and conditions for both the wastewater and water distribution plans which are shown attached.

If you are planning works anywhere in the North West, please read United Utilities' access statement before you start work to check how it will affect our network. <http://www.unitedutilities.com/work-near-asset.aspx>.

I trust the above meets with your requirements and look forward to hearing from you should you need anything further.

If you have any queries regarding this matter please [contact us](#).

Yours Faithfully,



Karen McCormack  
Property Searches Manager


## TERMS AND CONDITIONS - WASTEWATER AND WATER DISTRIBUTION PLANS

These provisions apply to the public sewerage, water distribution and telemetry systems (including sewers which are the subject of an agreement under Section 104 of the Water Industry Act 1991 and mains installed in accordance with the agreement for the self construction of water mains) (UUWL apparatus) of United Utilities Water Limited "(UUWL)".

### TERMS AND CONDITIONS:


- This Map and any information supplied with it is issued subject to the provisions contained below, to the exclusion of all others and no party relies upon any representation, warranty, collateral contract or other assurance of any person (whether party to this agreement or not) that is not set out in this agreement or the documents referred to in it.
- This Map and any information supplied with it is provided for general guidance only and no representation, undertaking or warranty as to its accuracy, completeness or being up to date is given or implied.
- In particular, the position and depth of any UUWL apparatus shown on the Map are approximate only. UUWL strongly recommends that a comprehensive survey is undertaken in addition to reviewing this Map to determine and ensure the precise location of any UUWL apparatus. The exact location, positions and depths should be obtained by excavation trial holes.
- The location and position of private drains, private sewers and service pipes to properties are not normally shown on this Map but their presence must be anticipated and accounted for and you are strongly advised to carry out your own further enquiries and investigations in order to locate the same.
- The position and depth of UUWL apparatus is subject to change and therefore this Map is issued subject to any removal or change in location of the same. The onus is entirely upon you to confirm whether any changes to the Map have been made subsequent to issue and prior to any works being carried out.
- This Map and any information shown on it or provided with it must not be relied upon in the event of any development, construction or other works (including but not limited to any excavations) in the vicinity of UUWL apparatus or for the purpose of determining the suitability of a point of connection to the sewerage or other distribution systems.
- No person or legal entity, including any company shall be relieved from any liability howsoever and whensoever arising for any damage caused to UUWL apparatus by reason of the actual position and/or depths of UUWL apparatus being different from those shown on the Map and any information supplied with it.
- If any provision contained herein is or becomes legally invalid or unenforceable, it will be taken to be severed from the remaining provisions which shall be unaffected and continue in full force and affect.
- This agreement shall be governed by English law and all parties submit to the exclusive jurisdiction of the English courts, save that nothing will prevent UUWL from bringing proceedings in any other competent jurisdiction, whether concurrently or otherwise.

## Wastewater Symbolology

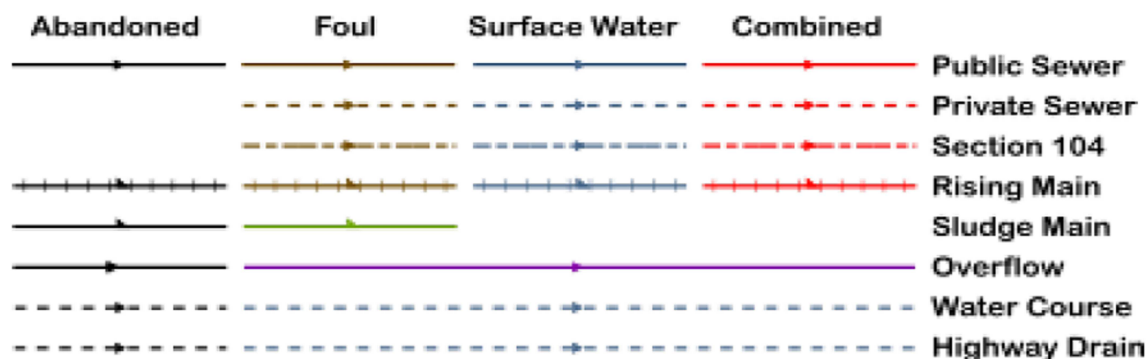

All point assets follow the standard colour convention: **red** – combined **brown** - foul  
**blue** – surface water **purple** - overflow

- |                         |                                 |
|-------------------------|---------------------------------|
| <b>Manhole</b>          | <b>Side Entry Manhole</b>       |
| <b>Head of System</b>   | <b>Outfall</b>                  |
| <b>Extent of Survey</b> | <b>Screen Chamber</b>           |
| <b>Rodding Eye</b>      | <b>Inspection Chamber</b>       |
| <b>Inlet</b>            | <b>Bifurcation Chamber</b>      |
| <b>Discharge Point</b>  | <b>Lamp Hole</b>                |
| <b>Vortex</b>           | <b>T Junction / Saddle</b>      |
| <b>Penstock</b>         | <b>Catchpit</b>                 |
| <b>Washout Chamber</b>  | <b>Valve Chamber</b>            |
| <b>Valve</b>            | <b>Vent Column</b>              |
| <b>Air Valve</b>        | <b>Vortex Chamber</b>           |
| <b>Non Return Valve</b> | <b>Penstock Chamber</b>         |
| <b>Soakaway</b>         | <b>Network Storage Tank</b>     |
| <b>Gully</b>            | <b>Sewer Overflow</b>           |
| <b>Cascade</b>          | <b>Ww Treatment Works</b>       |
| <b>Flow Meter</b>       | <b>Ww Pumping Station</b>       |
| <b>Hatch Box</b>        | <b>Septic Tank</b>              |
| <b>Oil Interceptor</b>  | <b>Control Kiosk</b>            |
| <b>Summit</b>           |                                 |
| <b>Drop Shaft</b>       | <b>Change of Characteristic</b> |
| <b>Orifice Plate</b>    |                                 |

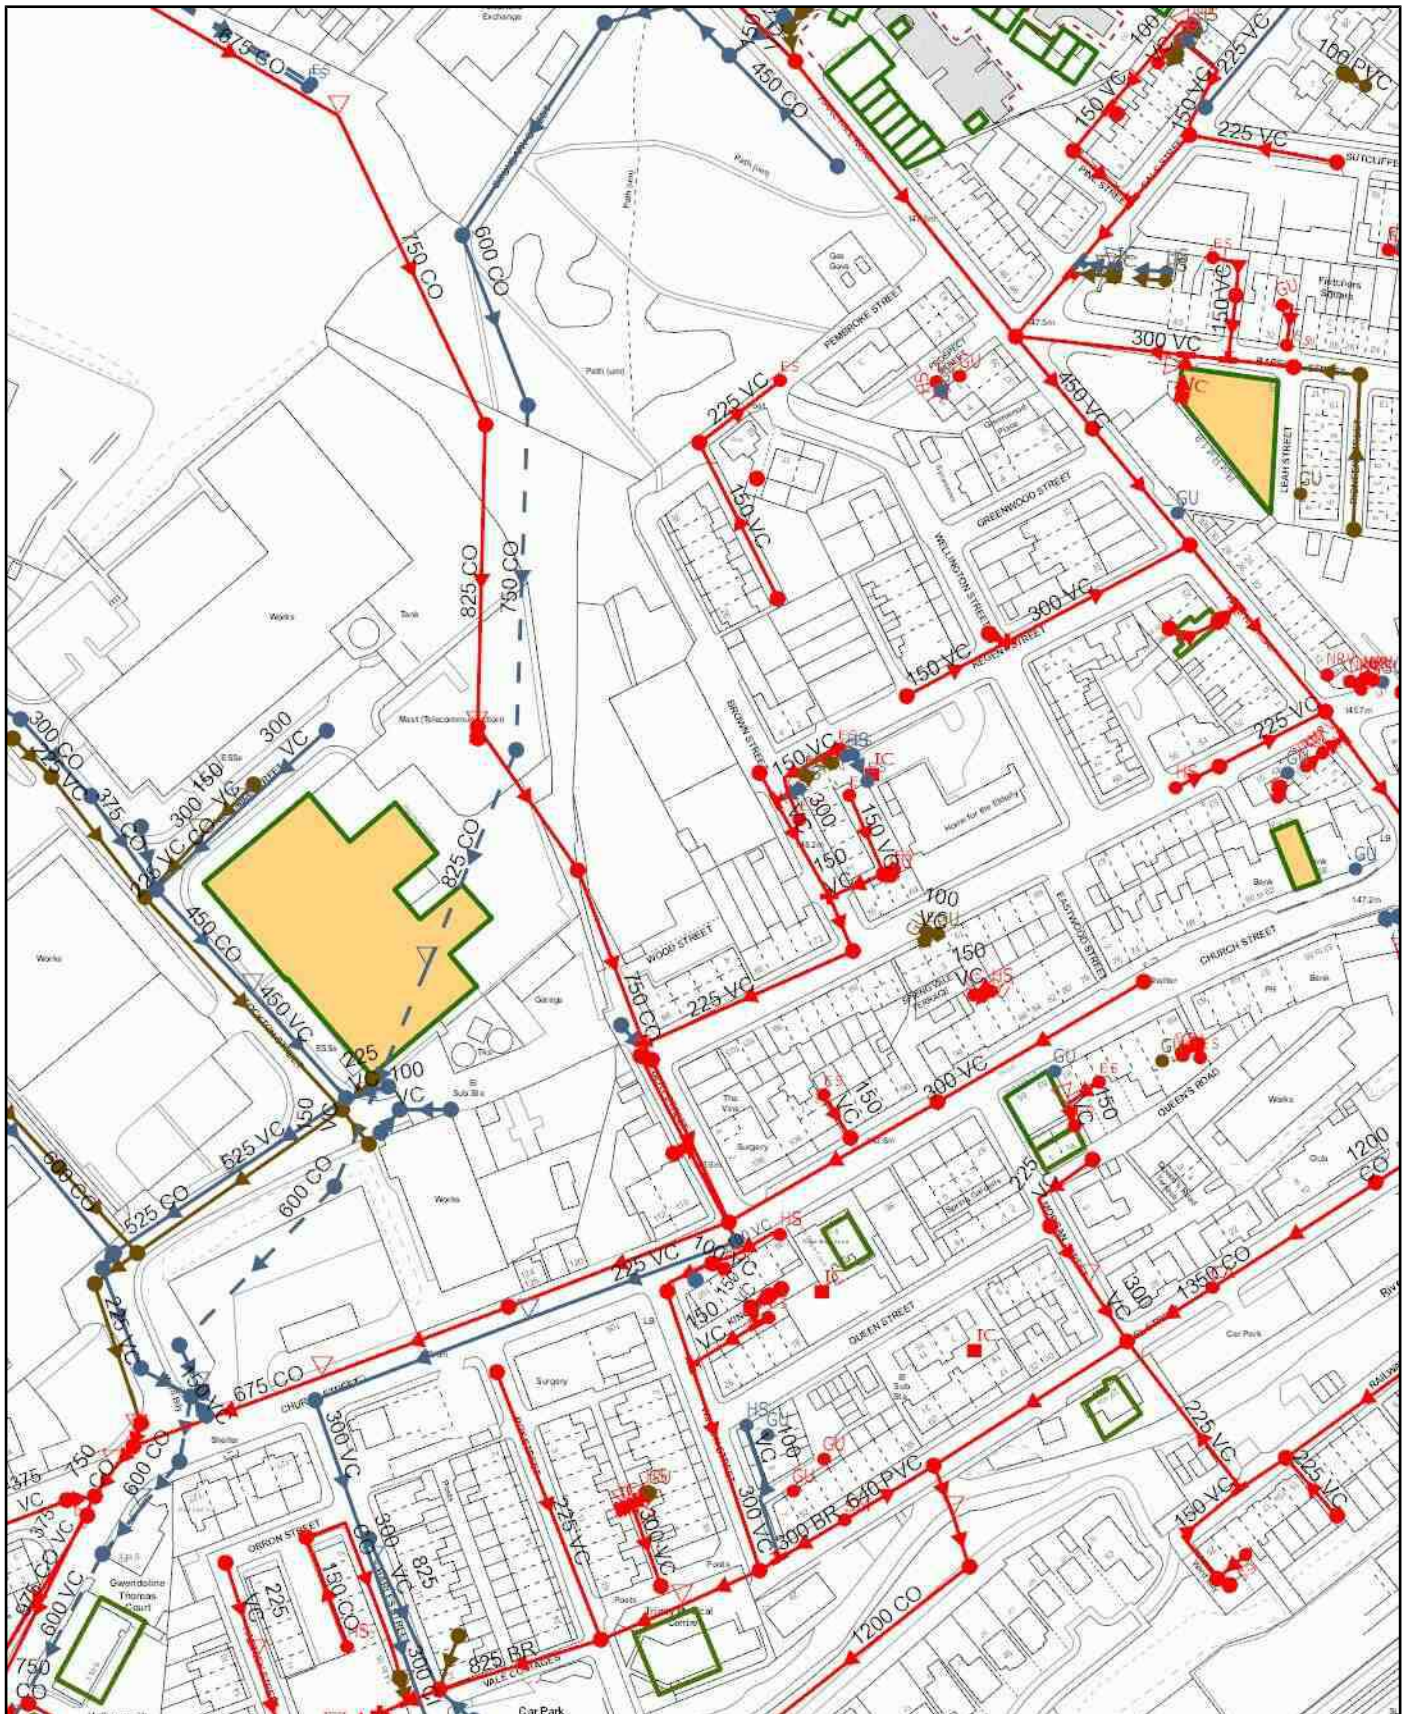

Scale: 1:1954  
Date: 03/03/2020

## SEWER RECORDS

Address or Site Reference: Brown Street Littleborough  
Printed by: Property Searches



The position of the underground apparatus shown on this plan is approximate only and is given in accordance with the best information currently available. United Utilities Water will not accept liability for any loss or damage caused by the actual position being different from those shown.

Crown copyright and database rights 2017 Ordnance Survey 100022432. Unauthorised reproduction will infringe these copyrights.

## Matthew Craig

---

**From:** Stephen McCann <Stephen.McCann@Rochdale.Gov.UK>  
**Sent:** 12 March 2020 11:03  
**To:** Matthew Craig; Andrew Eadie  
**Subject:** FRA query - Brown Street, Littleborough  
**Attachments:** Brown St site - Drainage Comments 12.3.20.pdf

Matthew,

Here are my comments.

Andrew:- I included your comment about the council having no records of flooding of the site.

### Stephen McCann

Drainage & Flooding Engineer  
Highways, Property & Strategic Housing



☎ 01706 924606

✉ [stephen.mccann@rochdale.gov.uk](mailto:stephen.mccann@rochdale.gov.uk)

---

**From:** Andrew Eadie <Andrew.Eadie@Rochdale.Gov.UK>  
**Sent:** 11 March 2020 19:44  
**To:** Stephen McCann <Stephen.McCann@Rochdale.Gov.UK>  
**Subject:** FW: FRA query - Brown Street, Littleborough

Hi Stephen,

Do you have anything to add, and I'll do a reply? I can tell them that we don't have any records relating to historic flood incidents at this site.

Cheers

### Andrew Eadie

Principal Planning Officer  
Planning & Development



☎ 01706 924371

✉ [andrew.eadie@rochdale.gov.uk](mailto:andrew.eadie@rochdale.gov.uk)

Rochdale Borough Council  
Floor 3, Number One Riverside  
Smith Street, Rochdale, OL16 1XU

---

**From:** Matthew Craig <[m.craig@thelkgroup.com](mailto:m.craig@thelkgroup.com)>  
**Sent:** 03 March 2020 14:00  
**To:** Strategic Planning <[Strategic.Planning@Rochdale.Gov.UK](mailto:Strategic.Planning@Rochdale.Gov.UK)>  
**Subject:** FRA query - Brown Street, Littleborough

Dear Sir/Madam

LK Consult Ltd. has been commissioned to undertake a Flood Risk Assessment (FRA), for land at Brown Street, Littleborough, OL15 8BW

Centred at approximate National Grid Reference 393519E, 416433N.

The area of interest appears to be in Flood Zone 1.

To complete the FRA we would be grateful if you could supply us with the following, if available, for the vicinity of the site:

- Records of any historic flood events and potential sources of flooding from foul and surface water sewers on site and in the area.
- Any restrictions to discharge into the sewers

If you have any queries please get in touch with me.

We are, of course, happy to pay your reasonable charge for this service. Please let me know by return what information is available and what the charge will be and we will pay the relevant fees by debit card as soon as possible.

Any advice or recommendations you may have regarding the potential discharges from the development of this site?

We will be in contact with all other relevant authorities to get a more complete understanding of the issues in the area.

Regards

Matthew Craig



Matthew Craig  
Environmental Scientist – Flood Risk  
LK Consult | 0161 763 7200 |  
Manchester | London | Liverpool | Glasgow |  
[www.thelkgroup.com](http://www.thelkgroup.com)

I N C R E A S I N G   L A N D   V A L U E

---



This email, its contents and any attachments are intended only for the above named. As the email may contain confidential and/or legally privileged information, if you are not, or suspect that you are not, the above named or the person responsible for delivery of the message to the above named, please delete or destroy the email and any attachments immediately and inform the sender of the error. Unauthorised access, use, disclosure, storage or copying is not permitted and may be unlawful. The views of the author may not necessarily reflect those of Rochdale Borough Council.

## Highways and Engineering Service - Economy and Environment

Author: **Stephen McCann**, Drainage & Flooding Engineer, Highways, Property & Strategic Housing

 01706 924606  [stephen.mccann@rochdale.gov.uk](mailto:stephen.mccann@rochdale.gov.uk)

Rochdale Borough Council, Floor 2, No. One Riverside, Smith Street, Rochdale, OL16 1XU

---

### FLOODING RECORDS

The council has no records relating to historic flood incidents at this site. However, you should check with the Environment Agency in case they have flooding records.

### SEWERS IN THE VICINITY

A 750mm dia. combined sewer runs through the site, which is a United Utilities Asset.

A 750mm dia concrete surface water SW drainage pipe (approx. 3m below ground) runs to the west of the site. According to United Utilities' plans (fig 1 below), the dashed line suggests that this pipe is a "culvert" i.e. a piped stream and consequently is maintained by Rochdale council.

The Drainage Officer believes that this 'culvert' is incorreccted labelled and should be a United Utilities asset because:-

- a review of historical maps (back to 1898) do not indicate that a permanent stream existed;
- the upstream connections to this 'culvert' are solely United Utilities' surface water pipes.

However, the Drainage Officer suggests that the Applicant sends this document to United Utilities when discussing discharging of foul and controlled surface water discharges to UU's assets. Once UU become involved in the discussion, RBC will discuss the issue in full with UU and the Applicant.

The government hierarchy of drainage directs that SW should be preferentially discharged to a SW pipe rather than a combined sewer. Since the 'culvert' is located approx. 15m away across land that is probably owned by McCormick (this can be checked via Land Registry), it will be easier for UU to gain permission to discharge to the culvert IF the pipe is classed as a UU sewer rather than as a 'culvert'. The reason:- a culvert has to be maintained by the landowner not UU; and UU has legal means to cross other land to make connections to its own sewerage system.

### SURFACE WATER DISCHARGE RATE

For brownfield sites, UU & RBC wish to target a reduction in accordance with national standards on sustainable drainage which seek to reduce run-off to greenfield rates. Our minimum expectation on a brownfield site is a 50% reduction in the rate of discharge for the 1 in 30 year storm. A flow control of 5 l/s is accepted as the minimum practical flow control value that can be applied using a vortex flow control such that the outlet diameter of the flow control does not block.

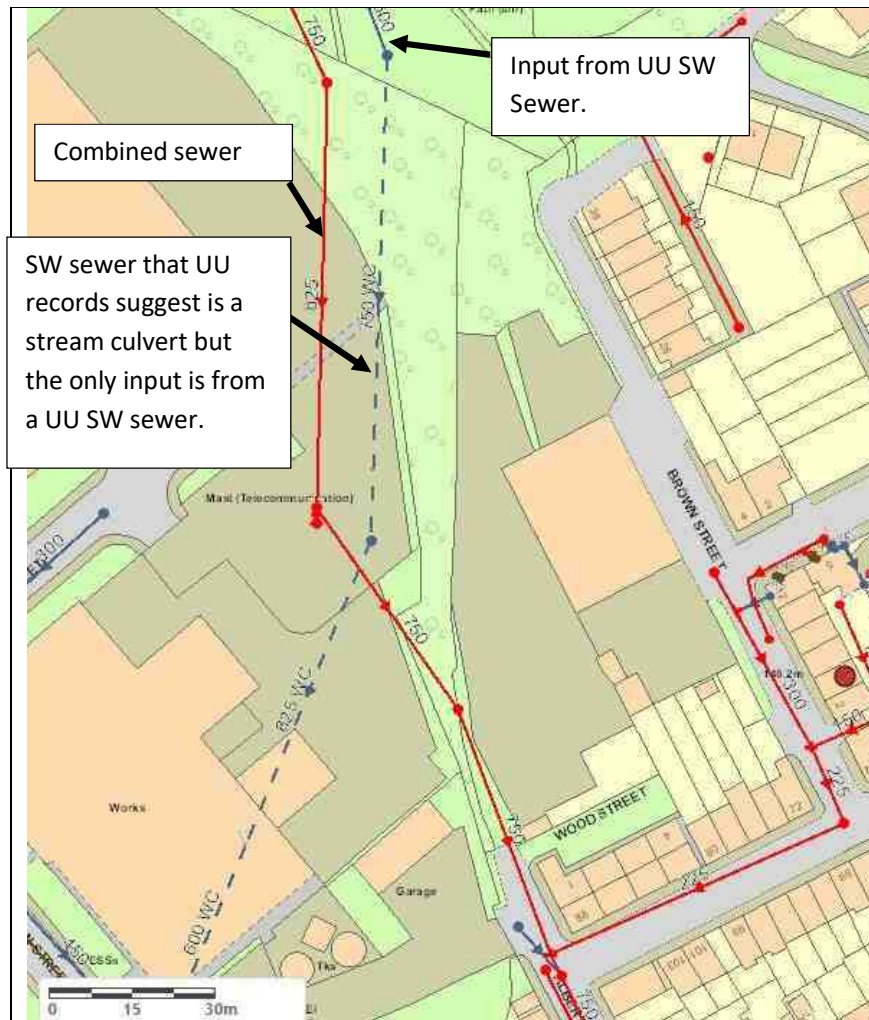


Fig1. UU sewer plans



Fig 2. Red line boundary to the site

This page has been left  
blank intentionally

## **Appendix E**

### **Calculations**

This page has been left  
blank intentionally



MasterDrain  
SW 16.08

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radclyffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>1</b>   |         |          |
| Date <b>03/04/20</b> |         |          |
| By                   | Checked | Reviewed |

|         |                     |
|---------|---------------------|
| Project | <b>Brown Street</b> |
| Title   | <b>1x10-5</b>       |

### Data:-

#### Location hydrological data (FSR):-

|            |                 |                |                     |
|------------|-----------------|----------------|---------------------|
| Location   | = Littleborough | Grid reference | = SD8913            |
| M5-60 (mm) | = 19.0          | r              | = 0.28              |
| Soil index | = 0.30          | SAAR (mm/yr)   | = 1150              |
| WRAP       | = 2             | Area           | = England and Wales |

Soil classification for WRAP type 2

- i) Very permeable soils with shallow ground water;
- ii) Permeable soils over rock or fragipan, commonly on slopes in western Britain associated with smaller areas of less permeable wet soils;
- iii) Moderately permeable soils, some with slowly permeable subsoils.

### Design data:-

Safety factor = 2.0 - Minor inconvenience (SF=2)  
 Fill porosity = 1.00  
 Equivalent porosity (n1) = 1.00

Area drained = 2100 m<sup>2</sup>

Infiltration coefficient = 0.036 m/hr  
 Effective inf. coeff (q) = 0.018

Return period = 100 yrs

Climate change factor = 40%

### Calculations :-

Perimeter of pit = (2 x Excavation Width)+(2 x Excavation Length)  
 Area of base = Excavation Width x Excavation Length  
 Infiltration area = (Area of base)+(Perimeter of pit x Hmax)  
 Temporary constant 'a'  
     = (Area of base / perimeter)-((AreaDrained x Rainfall depth /1000)/(Perimeter/Inf. coeff))  
 Temporary constant 'b' = (Perimeter/Inf. coeff) / (Area of base x porosity)  
 Hmax = a\*((EXP(-1 x b x Duration of storm))-1)

Note: The Hmax calculation is iterated to a maximum value of Hmax.

Note: Duration of storm in hours, Rainfall depth in mm/hr x Climate Change factor.

### Results :-

Emptying time to 50% volume = 22:38 (hr:min)

**hMax (Depth) = 1.0 metres**

Time to maximum = 17:00 hr:min

Rainfall at maximum = 7.42mm/hr

Width (m) = 10.0

Length (m) = 20.0

Total Infiltration area = 259.8m<sup>2</sup> (base area + sidewall area).

Total available volume = 199.20m<sup>3</sup>

N.B. The rainfall rates are calculated using the location specific values above in accordance with the Wallingford procedure.  
 Formulae and methods from CIRIA 156.



MasterDrain  
SW 16.08

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>1</b>   |         |          |
| Date <b>03/04/20</b> |         |          |
| By                   | Checked | Reviewed |

|         |                     |
|---------|---------------------|
| Project | <b>Brown Street</b> |
| Title   | <b>1x10-5</b>       |

### Data:-

#### Hydrology:-

|              |                 |                |                     |
|--------------|-----------------|----------------|---------------------|
| Location     | = Littleborough | Grid reference | = SD8913            |
| M5-60 (mm)   | = 19            | r              | = 0.28              |
| WRAP         | = 2             | Soil index     | = 0.30              |
| SAAR (mm/yr) | = 1150          | Area           | = England and Wales |

#### Soil classification for WRAP type 2

- i) Very permeable soils with shallow ground water;
- ii) Permeable soils over rock or fragipan, commonly on slopes in western Britain associated with smaller areas of less permeable wet soils;
- iii) Moderately permeable soils, some with slowly permeable subsoils.

### Design data:-

|               |                         |                  |                         |
|---------------|-------------------------|------------------|-------------------------|
| Pit length    | = 20.00 m               | Pit width        | = 10.00 m               |
| Pit depth     | = 1.00 m                | Available volume | = 199.20 m <sup>3</sup> |
| Voids %       | = 100                   | Pit volume       | = 199.20 m <sup>3</sup> |
| Max inf area  | = 259.76 m <sup>2</sup> | Inf coeff.       | = 0.0360 m/hr           |
| Season        | = Winter                | Climate change   | = 40.0 %                |
| Return period | = 100 yrs               |                  |                         |


### Results:-

| Duration<br>hours | Peak rain<br>mm/hr | Max volume<br>m <sup>3</sup> | Max. Outflow<br>l/s | Peak time<br>hours | Max depth<br>mm | % full |
|-------------------|--------------------|------------------------------|---------------------|--------------------|-----------------|--------|
| 0.25              | 23.05              | 60.14                        | 2.18                | 0.25               | 300.72          | 30.19  |
| 0.50              | 16.10              | 82.80                        | 2.25                | 0.50               | 413.98          | 41.56  |
| 1.00              | 10.76              | 107.97                       | 2.32                | 1.00               | 539.84          | 54.20  |
| 2.00              | 6.92               | 133.06                       | 2.40                | 2.00               | 665.31          | 66.80  |
| 3.00              | 5.24               | 145.24                       | 2.44                | 3.00               | 726.19          | 72.91  |
| 4.00              | 4.27               | 151.85                       | 2.46                | 4.00               | 759.27          | 76.23  |
| 6.00              | 4.33               | 159.42                       | 2.48                | 5.52               | 797.08          | 80.03  |
| 8.00              | 4.31               | 162.81                       | 2.49                | 7.04               | 814.06          | 81.73  |
| 10.00             | 4.34               | 164.06                       | 2.49                | 8.40               | 820.32          | 82.36  |
| 12.00             | 4.38               | 164.18                       | 2.50                | 9.72               | 820.90          | 82.42  |
| 16.00             | 4.50               | 162.19                       | 2.49                | 12.48              | 810.95          | 81.42  |
| 24.00             | 4.51               | 153.40                       | 2.47                | 17.76              | 766.99          | 77.01  |
| 36.00             | 4.25               | 135.76                       | 2.42                | 25.56              | 678.82          | 68.15  |
| 48.00             | 4.37               | 117.03                       | 2.36                | 32.64              | 585.13          | 58.75  |
| 96.00             | 3.81               | 52.11                        | 2.18                | 59.52              | 260.54          | 26.16  |
| 192.00            | 0.00               | 0.00                         | 0.00                | 0.00               | 0.00            | 0.00   |

### Results display

This display shows data associated with the maximum state:-

Duration - length of storm in hours  
Peak rain mm/hr - rainfall intensity at peak of storage  
Max volume m<sup>3</sup> - water volume at peak of storage  
Max. Outflow l/s - infiltration rate at peak of storage  
Peak time hrs - time at peak of storage  
% full - % of available volume used at peak of storage



MasterDrain  
SW 16.08

# The LK Group





www.thelkgroup.com


Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>2</b>   |         |          |
| Date <b>03/04/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street**

Title **1x10-5**

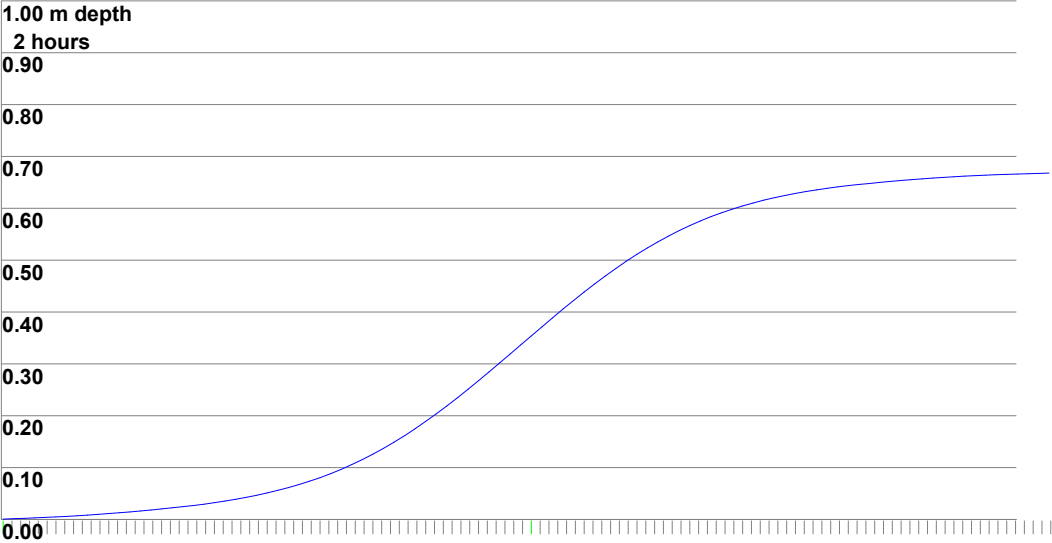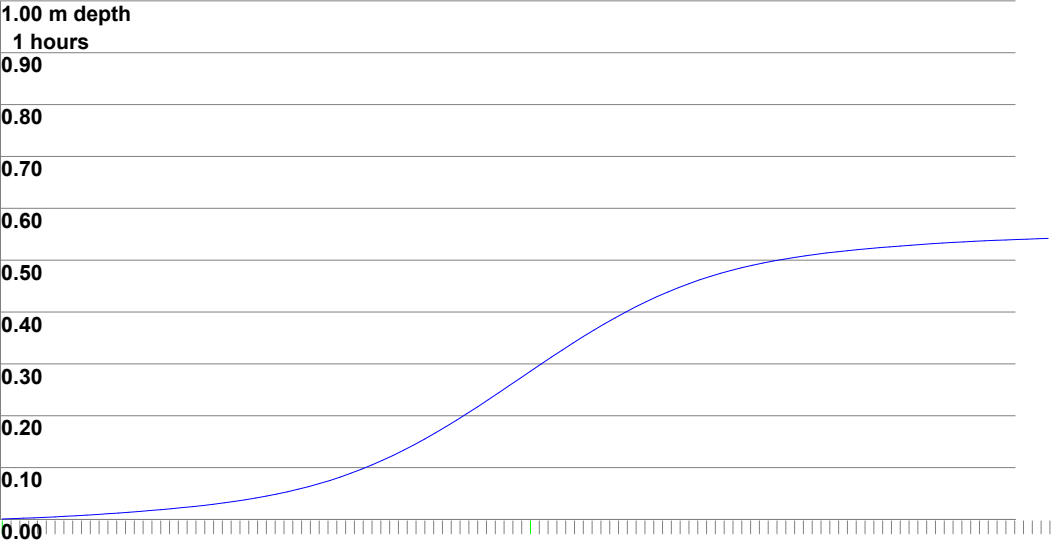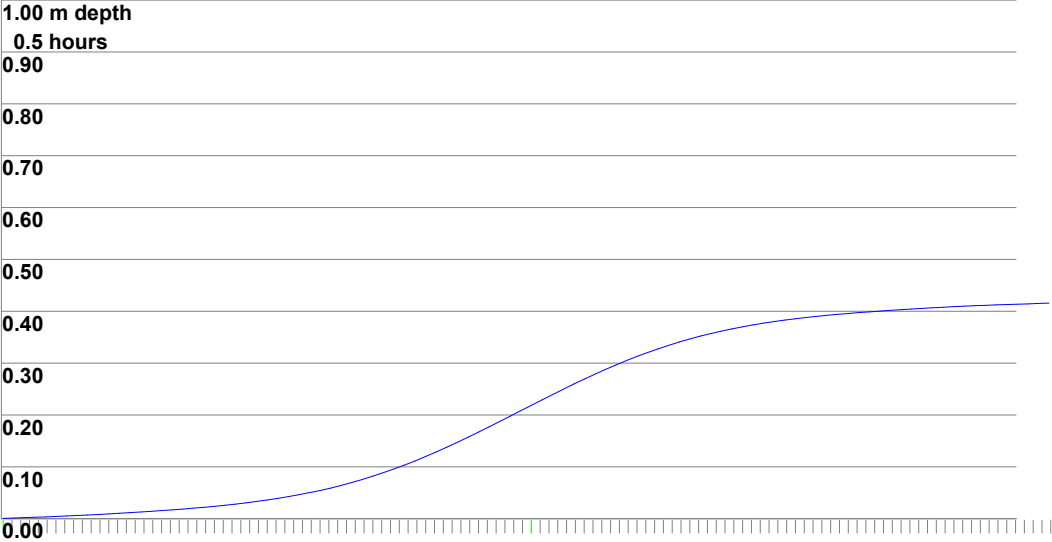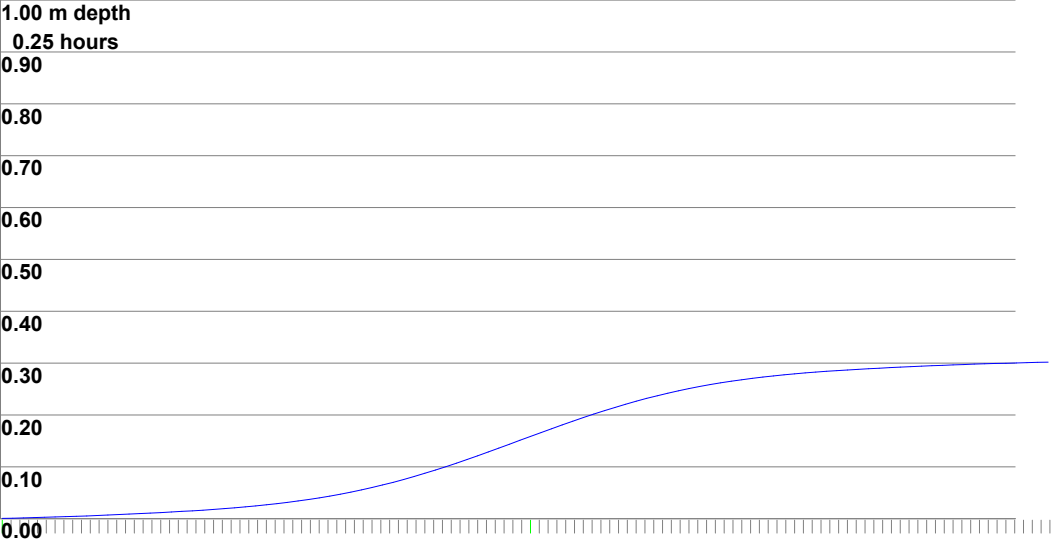



MasterDrain  
SW 16.08

# The LK Group





www.thelkgroup.com


Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>3</b>   |         |          |
| Date <b>03/04/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street**

Title **1x10-5**

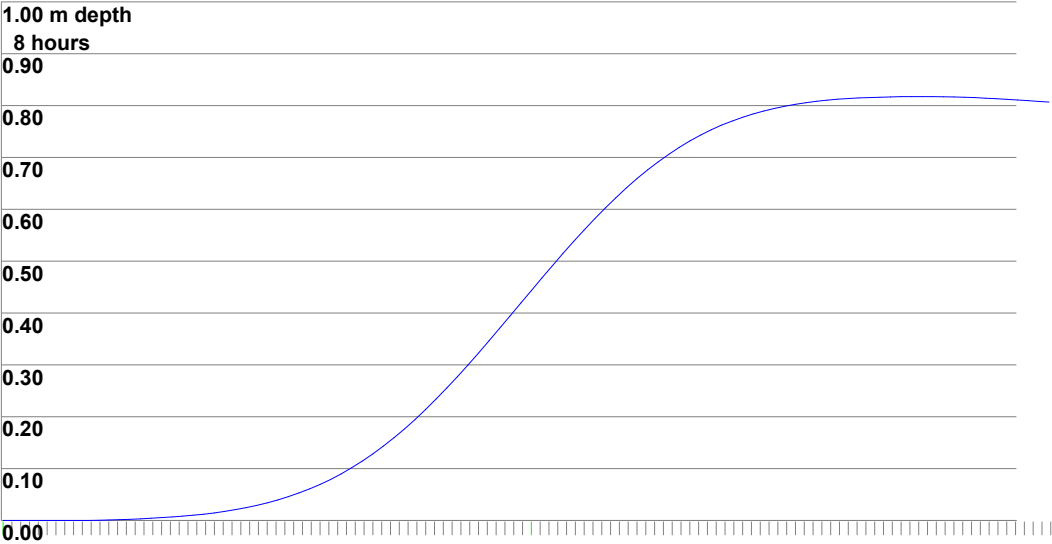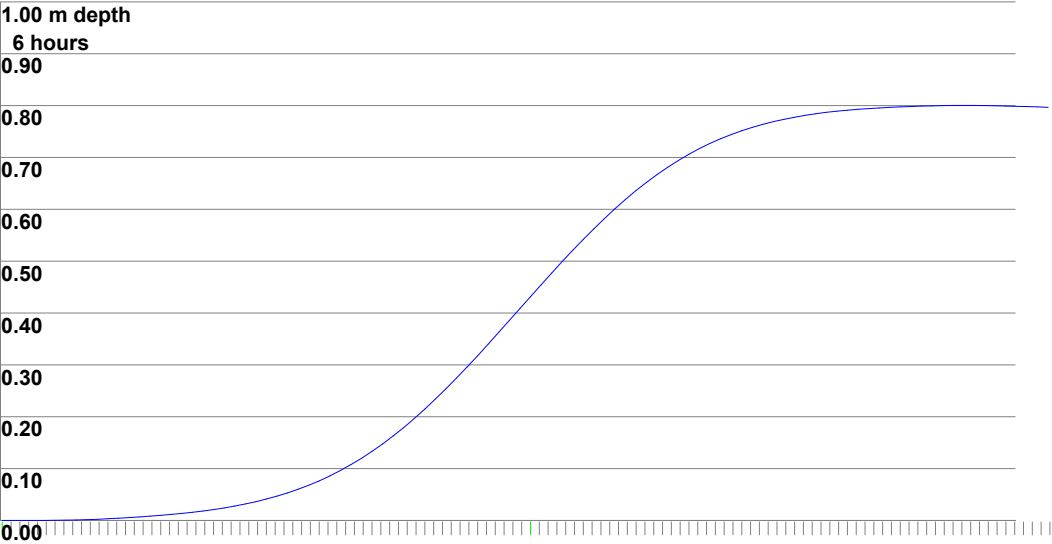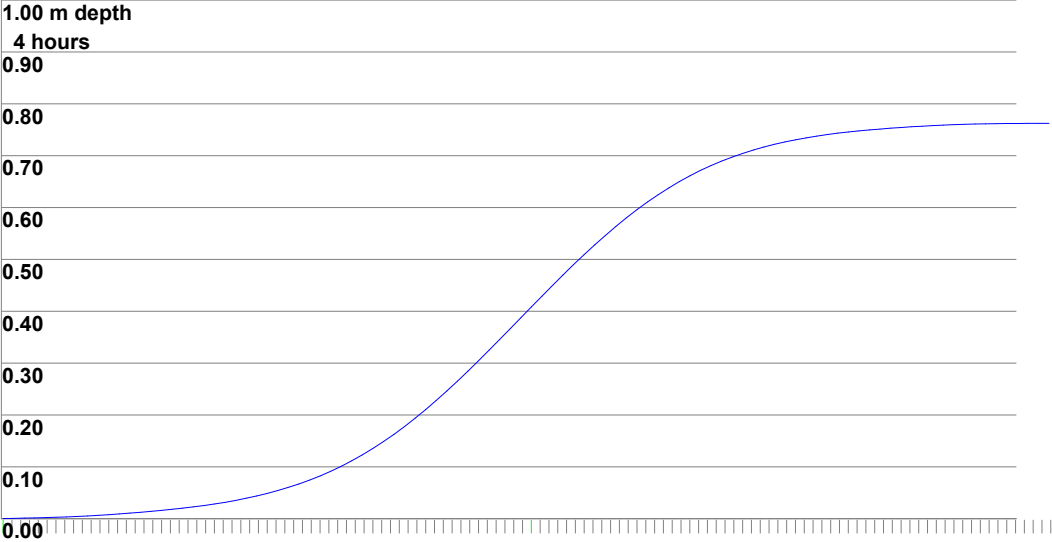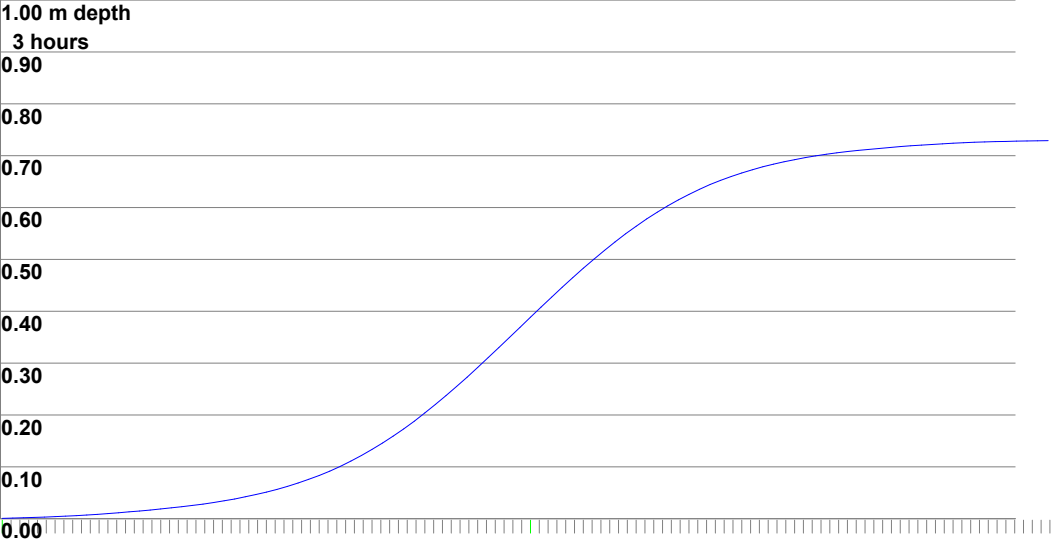



MasterDrain  
SW 16.08

# The LK Group





www.thelkgroup.com


Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>4</b>   |         |          |
| Date <b>03/04/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street**

Title **1x10-5**

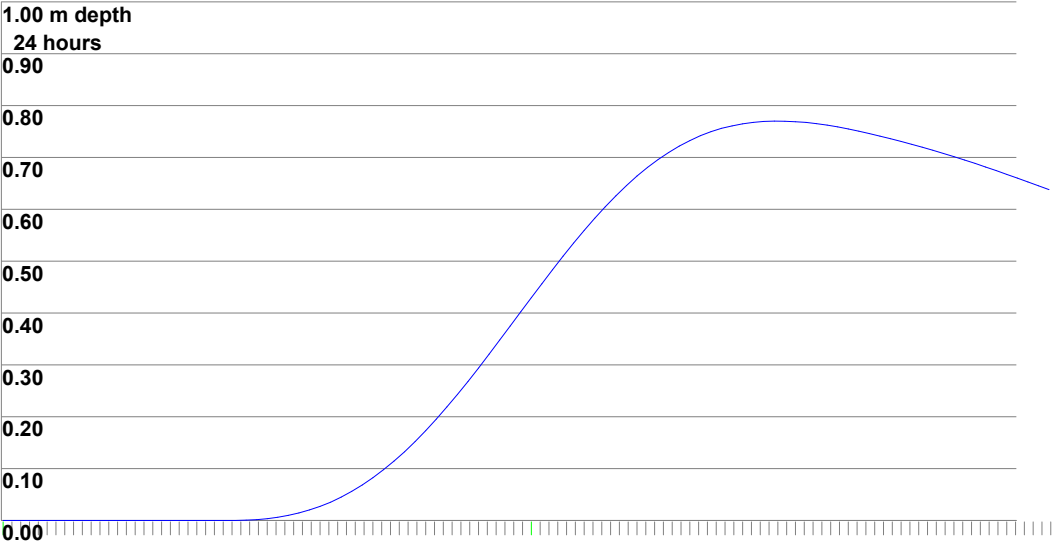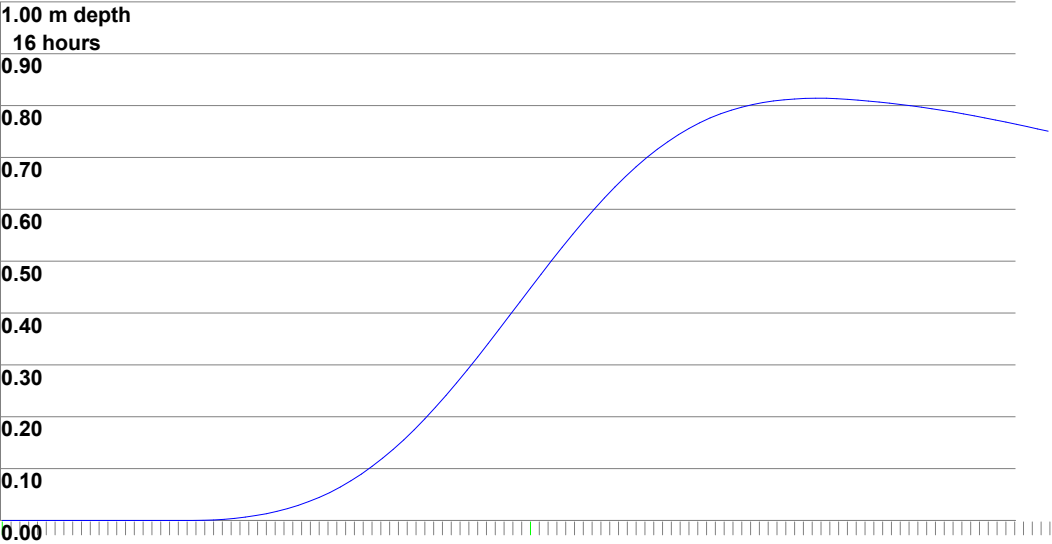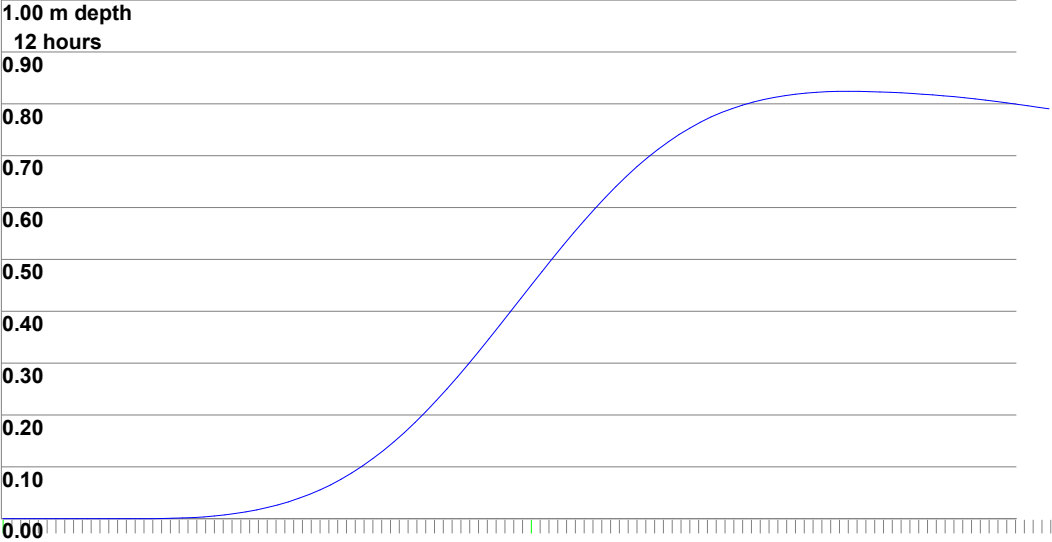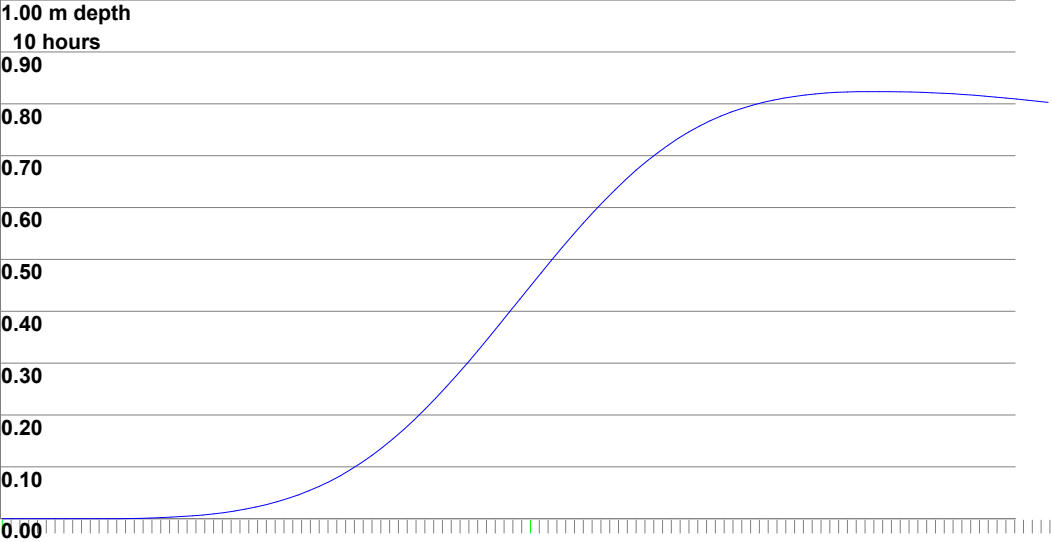



MasterDrain  
SW 16.08

# The LK Group





www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>5</b>   |         |          |
| Date <b>03/04/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street**

Title **1x10-5**

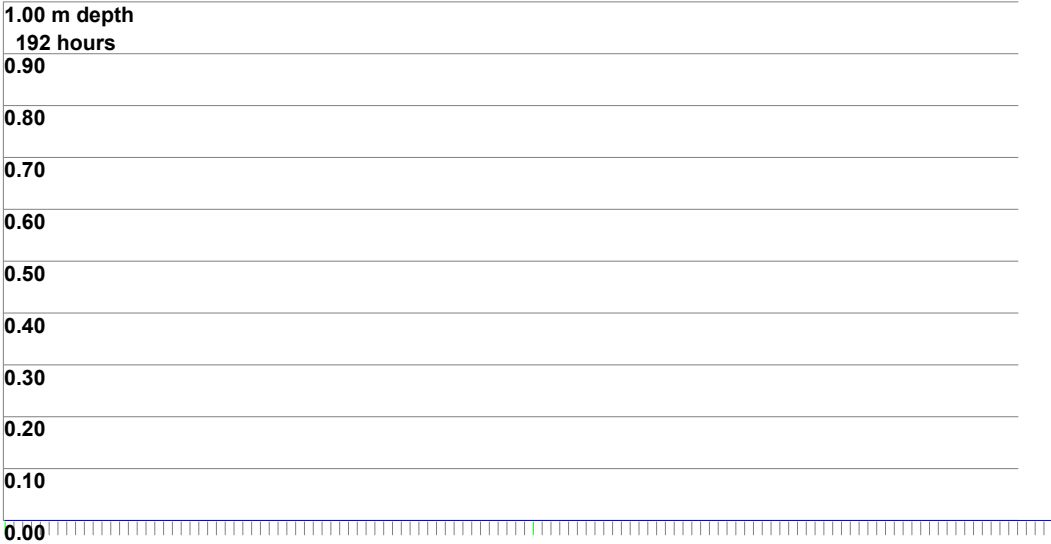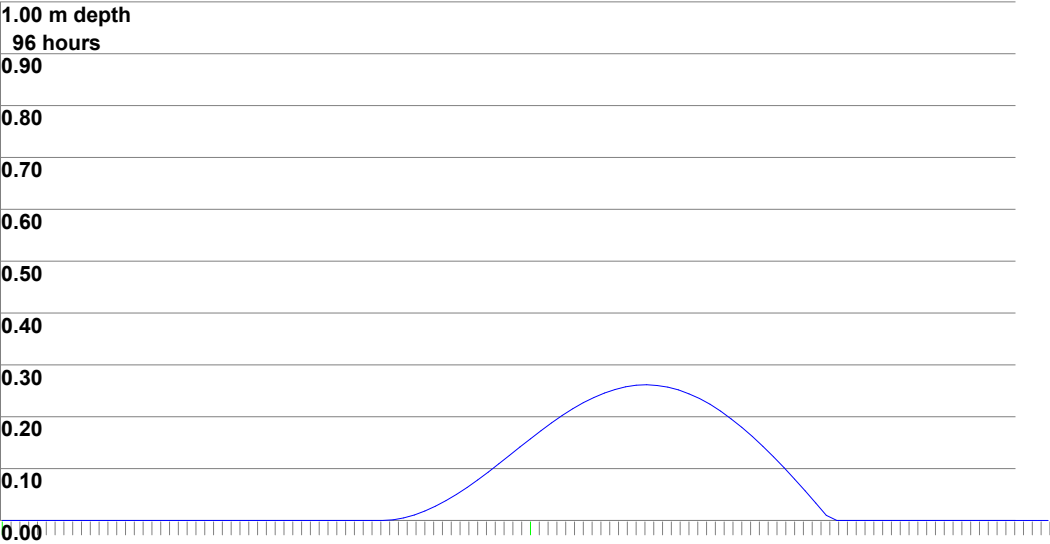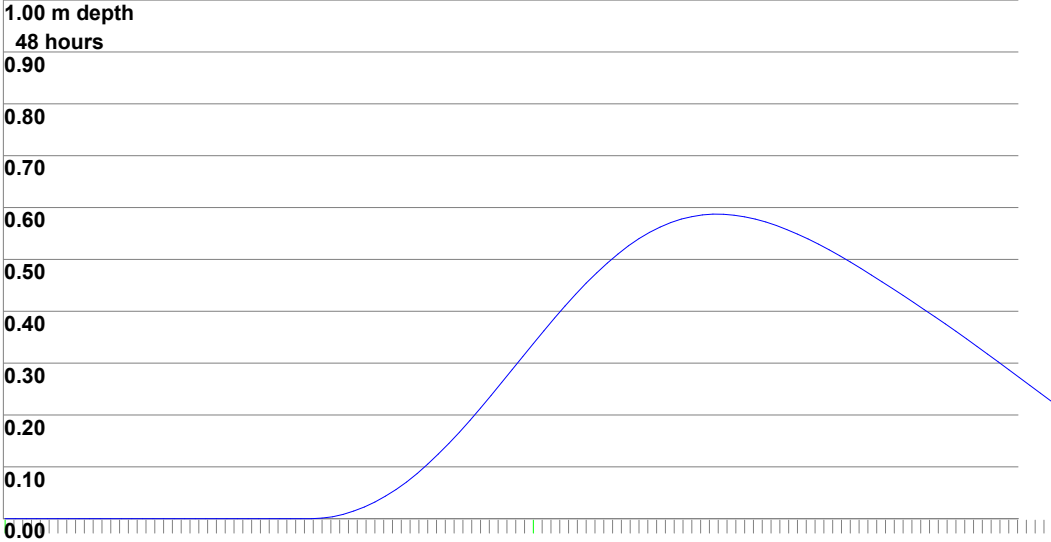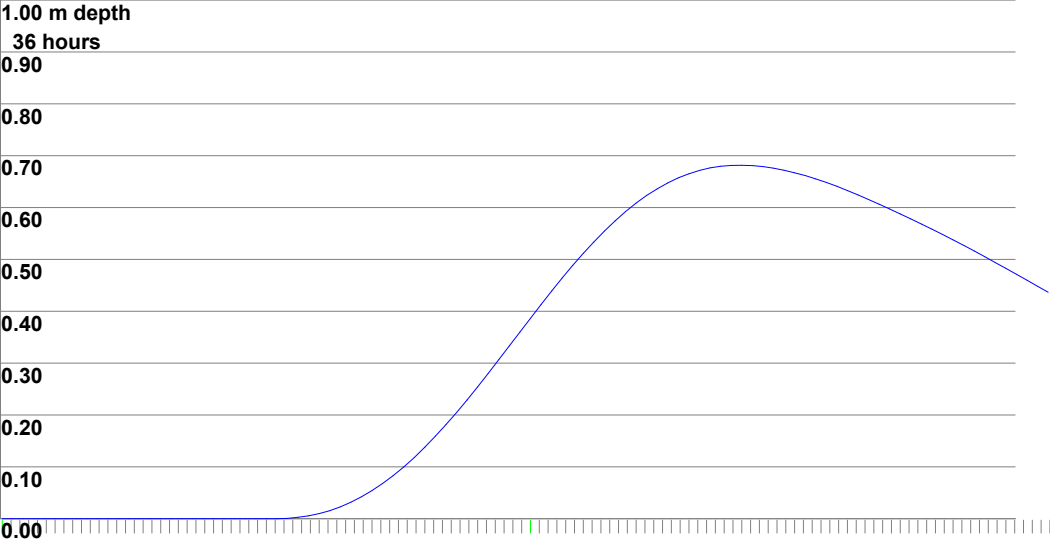



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>1</b>   |         |          |
| Date <b>04/03/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street, Littleborough**

Title **Peak Runoff - 1 in 1 year**

### Area data:-

FSR data

M5-60 = 19

Soil index = 0.30

WRAP value = 2

r = 0.28

SAAR = 1150

Nat grid = SD8913

### Site data:-

Ret. period (yrs) = 1

Time of entry = 10.00

Impervious area drained = 4200 m<sup>2</sup>

Site slope = Mild <2% (1:50)

Length of overland flow = 0.00

ToC = 10.0 mins

Overland flow time = 0.0 mins

Pervious area drained = 0 m<sup>2</sup>

Soil type = Medium textured

Climate change factor = 0.0 %

### Calculated data:-

Calculated runoff factor = 79.0%

Rainfall rate = 38.6 mm/Hr

UCWI = 115.0

Runoff rate (gross) = 35.6 l/s

### Methods

**Runoff factor (RF) = 79.0, calculated from:-**

Runoff factor =  $(0.829 \times \text{PIMP}) + (25 \times \text{SOIL}) + (0.078 \times \text{UCWI}) - 20.7$

where

PIMP =  $\text{Impervious Area} \times 100 / (\text{Impervious Area} + \text{Pervious Area})$

UCWI = Calculated value for Wetness Index

Calculations produced by MasterDrain Surface Water design program



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>1</b>   |         |          |
| Date <b>04/03/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street, Littleborough**

Title **Peak Runoff - 1 in 30 year**

### Area data:-

FSR data

M5-60 = 19

Soil index = 0.30

WRAP value = 2

r = 0.28

SAAR = 1150

Nat grid = SD8913

### Site data:-

Ret. period (yrs) = 30

Time of entry = 6.00

Impervious area drained = 4200 m<sup>2</sup>

Site slope = Mild <2% (1:50)

Length of overland flow = 0.00

ToC = 6.0 mins

Overland flow time = 0.0 mins

Pervious area drained = 0 m<sup>2</sup>

Soil type = Medium textured

Climate change factor = 0.0 %

### Calculated data:-

Calculated runoff factor = 79.0%

Rainfall rate = 94.6 mm/Hr

UCWI = 115.0

Runoff rate (gross) = 87.2 l/s

### Methods

Runoff factor (RF) = 79.0, calculated from:-

Runoff factor =  $(0.829 \times \text{PIMP}) + (25 \times \text{SOIL}) + (0.078 \times \text{UCWI}) - 20.7$

where

PIMP =  $\frac{\text{Impervious Area} \times 100}{\text{Impervious Area} + \text{Pervious Area}}$

UCWI = Calculated value for Wetness Index

Calculations produced by MasterDrain Surface Water design program



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>1</b>   |         |          |
| Date <b>04/03/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street, Littleborough**

Title **Peak Runoff - 1 in 100 year**

### Area data:-

FSR data

M5-60 = 19

Soil index = 0.30

WRAP value = 2

r = 0.28

SAAR = 1150

Nat grid = SD8913

### Site data:-

Ret. period (yrs) = 100

Time of entry = 6.00

Impervious area drained = 4200 m<sup>2</sup>

Site slope = Mild <2% (1:50)

Length of overland flow = 0.00

ToC = 6.0 mins

Overland flow time = 0.0 mins

Pervious area drained = 0 m<sup>2</sup>

Soil type = Medium textured

Climate change factor = 0.0 %

### Calculated data:-

Calculated runoff factor = 79.0%

Rainfall rate = 119.4 mm/Hr

UCWI = 115.0

Runoff rate (gross) = 110.0 l/s

### Methods

Runoff factor (RF) = 79.0, calculated from:-

Runoff factor =  $(0.829 \times \text{PIMP}) + (25 \times \text{SOIL}) + (0.078 \times \text{UCWI}) - 20.7$

where

PIMP =  $\text{Impervious Area} \times 100 / (\text{Impervious Area} + \text{Pervious Area})$

UCWI = Calculated value for Wetness Index

Calculations produced by MasterDrain Surface Water design program



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no. **1**

Date **31/03/20**

Project **Brown Street, Littleborough**  
Title **Peak Flow Storage - 1 in 30 year**

|    |         |          |
|----|---------|----------|
| By | Checked | Reviewed |
|    |         |          |

### Data:-

#### FSR Hydrology:-

Location = Littleborough

M5-60 (mm) = 19

Soil index = 0.30

Return period = 30

UCWI = 117.8

Grid reference = SD8913

r = 0.28

SAAR (mm/yr) = 1150

WRAP = 2

Climate change = 0

i) Very permeable soils with shallow ground water;

ii) Permeable soils over rock or fragipan, commonly on slopes in western Britain associated with smaller areas of less permeable wet soils; The layer is low in organic matter, mottled and (fragipan - a natural subsurface horizon having a higher bulk density than the solum above. Seemingly cemented when dry but showing moderate to weak brittleness when moist. Slowly or very slowly permeable to water. It is found in profiles of either cultivated or virgin soils but not in calcareous material).

iii) Moderately permeable soils, some with slowly permeable subsoils.

Runoff factor (RF) = 37.0, calculated from:-

Runoff factor =  $(0.829 \times \text{PIMP}) + (25 \times \text{SOIL}) + (0.078 \times \text{UCWI}) - 20.7$

where

PIMP = Impervious Area \* 100 / (Impervious Area + Pervious Area)

UCWI = Calculated value for Wetness Index

### Design data:-

Imperv. area = 2100 m<sup>2</sup>

Total area (TA) = 4200 m<sup>2</sup>

Allowed discharge rate = 5.000 l/s

Additional flow = 0.00 l/s

Pervious area = 2100 m<sup>2</sup>

Equiv area = 1554 m<sup>2</sup> (TA x RF).

Areal reduction factor = 1.000

Climate change factor = 0

### Calculated data:-

Time to max = 64.0 mins

Rainfall at max = 28.10 mm/hr

Pipeline storage = 0.0 m<sup>3</sup>

Offline storage = 0.0 m<sup>3</sup>

Calculated storage volume = 31.1 m<sup>3</sup>

Allowed discharge rate = 5.000 l/s

Available MH storage = 0.0 m<sup>3</sup>

### Fixed 6 hour data:-

Rainfall event = 6 hours

Rainfall rate = 9.00 mm/hr

Calculated storage volume = 0.0 m<sup>3</sup>

Allowed discharge rate = 5.000 l/s

### Rainfall intensities calculated using the Wallingford Procedure

### Storage lengths for initial calculation (x 1.1, 1.2, 1.3 or 1.5 as above if required) :-

| Diam | Len    | Diam | Len  | Ovoid      | Len   | Box culvert | Len   |
|------|--------|------|------|------------|-------|-------------|-------|
| 100  | 3966.5 | 1125 | 31.3 | 400 x 600  | 173.0 | 500 x 500   | 124.6 |
| 150  | 1762.9 | 1200 | 27.5 | 600 x 900  | 75.3  | 500 x 750   | 83.1  |
| 225  | 783.5  | 1275 | 24.4 | 800 x 1200 | 42.4  | 500 x 1000  | 62.3  |
| 300  | 440.7  | 1350 | 21.8 |            |       | 750 x 1000  | 41.5  |
| 375  | 282.1  | 1425 | 19.5 |            |       | 750 x 1200  | 34.6  |
| 450  | 195.9  | 1500 | 17.6 |            |       | 750 x 1500  | 27.7  |
| 525  | 143.9  | 1575 | 16.0 |            |       | 1000 x 1000 | 31.1  |
| 600  | 110.2  | 1650 | 14.6 |            |       | 1000 x 1200 | 26.0  |
| 675  | 87.1   | 1725 | 13.3 |            |       | 1000 x 1500 | 20.8  |
| 750  | 70.5   | 1800 | 12.2 |            |       | 1000 x 1800 | 17.3  |
| 825  | 58.3   | 1875 | 11.3 |            |       | 1000 x 2000 | 15.6  |
| 900  | 49.0   | 1950 | 10.4 |            |       | 1500 x 1500 | 13.8  |
| 975  | 41.7   | 2025 | 9.7  |            |       | 1500 x 1800 | 11.5  |
| 1050 | 36.0   | 2100 | 9.0  |            |       | 1500 x 2000 | 10.4  |



MasterDrain  
SW

Data:-

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no. **2**

Date **31/03/20**

Project **Brown Street, Littleborough**

Title **Peak Flow Storage - 1 in 30 year**


By

Checked

Reviewed

| Time<br>(mins) | Rain<br>mm/hr | Inflow<br>(m3) | Outflow<br>(m3) | Balance<br>(m3) |
|----------------|---------------|----------------|-----------------|-----------------|
| 10             | 77.0          | 21.567         | 3.000           | 18.567          |
| 20             | 55.0          | 30.832         | 6.000           | 24.832          |
| 30             | 44.0          | 37.023         | 9.000           | 28.023          |
| 40             | 37.0          | 41.804         | 12.000          | 29.804          |
| 50             | 33.0          | 45.745         | 15.000          | 30.745          |
| 60             | 29.0          | 49.119         | 18.000          | 31.119          |
| 70             | 27.0          | 52.081         | 21.000          | 31.081          |
| 80             | 24.0          | 54.726         | 24.000          | 30.726          |
| 90             | 23.0          | 57.120         | 27.000          | 30.120          |
| 100            | 21.0          | 59.308         | 30.000          | 29.308          |
| 110            | 20.0          | 61.324         | 33.000          | 28.324          |
| 120            | 19.0          | 63.194         | 36.000          | 27.194          |
| 130            | 18.0          | 64.936         | 39.000          | 25.936          |
| 140            | 17.0          | 66.568         | 42.000          | 24.568          |
| 150            | 16.0          | 68.102         | 45.000          | 23.102          |
| 160            | 16.0          | 69.549         | 48.000          | 21.549          |
| 170            | 15.0          | 70.918         | 51.000          | 19.918          |
| 180            | 14.0          | 72.215         | 54.000          | 18.215          |
| 190            | 14.0          | 73.448         | 57.000          | 16.448          |
| 200            | 13.0          | 74.622         | 60.000          | 14.622          |
| 210            | 13.0          | 75.742         | 63.000          | 12.742          |
| 220            | 12.0          | 76.859         | 66.000          | 10.859          |
| 230            | 12.0          | 77.946         | 69.000          | 8.946           |
| 240            | 12.0          | 78.999         | 72.000          | 6.999           |
| 250            | 11.0          | 80.020         | 75.000          | 5.020           |
| 260            | 11.0          | 81.011         | 78.000          | 3.011           |
| 270            | 11.0          | 81.975         | 81.000          | 0.975           |
| 280            | 11.0          | 82.911         | 84.000          | 0.000           |
| 290            | 10.0          | 83.824         | 87.000          | 0.000           |
| 300            | 10.0          | 84.713         | 90.000          | 0.000           |
| 310            | 10.0          | 85.581         | 93.000          | 0.000           |
| 320            | 10.0          | 86.428         | 96.000          | 0.000           |
| 330            | 9.0           | 87.255         | 99.000          | 0.000           |
| 340            | 9.0           | 88.064         | 102.000         | 0.000           |
| 350            | 9.0           | 88.856         | 105.000         | 0.000           |
| 360            | 9.0           | 89.631         | 108.000         | 0.000           |
| 370            | 9.0           | 90.390         | 111.000         | 0.000           |
| 380            | 9.0           | 91.134         | 114.000         | 0.000           |
| 390            | 8.0           | 91.864         | 117.000         | 0.000           |
| 400            | 8.0           | 92.580         | 120.000         | 0.000           |
| 410            | 8.0           | 93.282         | 123.000         | 0.000           |
| 420            | 8.0           | 93.972         | 126.000         | 0.000           |
| 430            | 8.0           | 94.650         | 129.000         | 0.000           |
| 440            | 8.0           | 95.317         | 132.000         | 0.000           |
| 450            | 8.0           | 95.972         | 135.000         | 0.000           |
| 460            | 8.0           | 96.616         | 138.000         | 0.000           |
| 470            | 7.0           | 97.250         | 141.000         | 0.000           |
| 480            | 7.0           | 97.874         | 144.000         | 0.000           |
| 490            | 7.0           | 98.489         | 147.000         | 0.000           |
| 500            | 7.0           | 99.094         | 150.000         | 0.000           |
| 510            | 7.0           | 99.690         | 153.000         | 0.000           |
| 520            | 7.0           | 100.278        | 156.000         | 0.000           |
| 530            | 7.0           | 100.857        | 159.000         | 0.000           |
| 540            | 7.0           | 101.428        | 162.000         | 0.000           |
| 550            | 7.0           | 101.992        | 165.000         | 0.000           |
| 560            | 7.0           | 102.547        | 168.000         | 0.000           |
| 570            | 6.0           | 103.096        | 171.000         | 0.000           |
| 580            | 6.0           | 103.637        | 174.000         | 0.000           |
| 590            | 6.0           | 104.172        | 177.000         | 0.000           |
| 600            | 6.0           | 104.699        | 180.000         | 0.000           |

Storage volume (m<sup>3</sup>) = 31.1 m<sup>3</sup>



MasterDrain  
SW

# The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no.

3

Date

31/03/20

By

Checked


Reviewed

Project

Brown Street, Littleborough

Title

Peak Flow Storage - 1 in 30 year

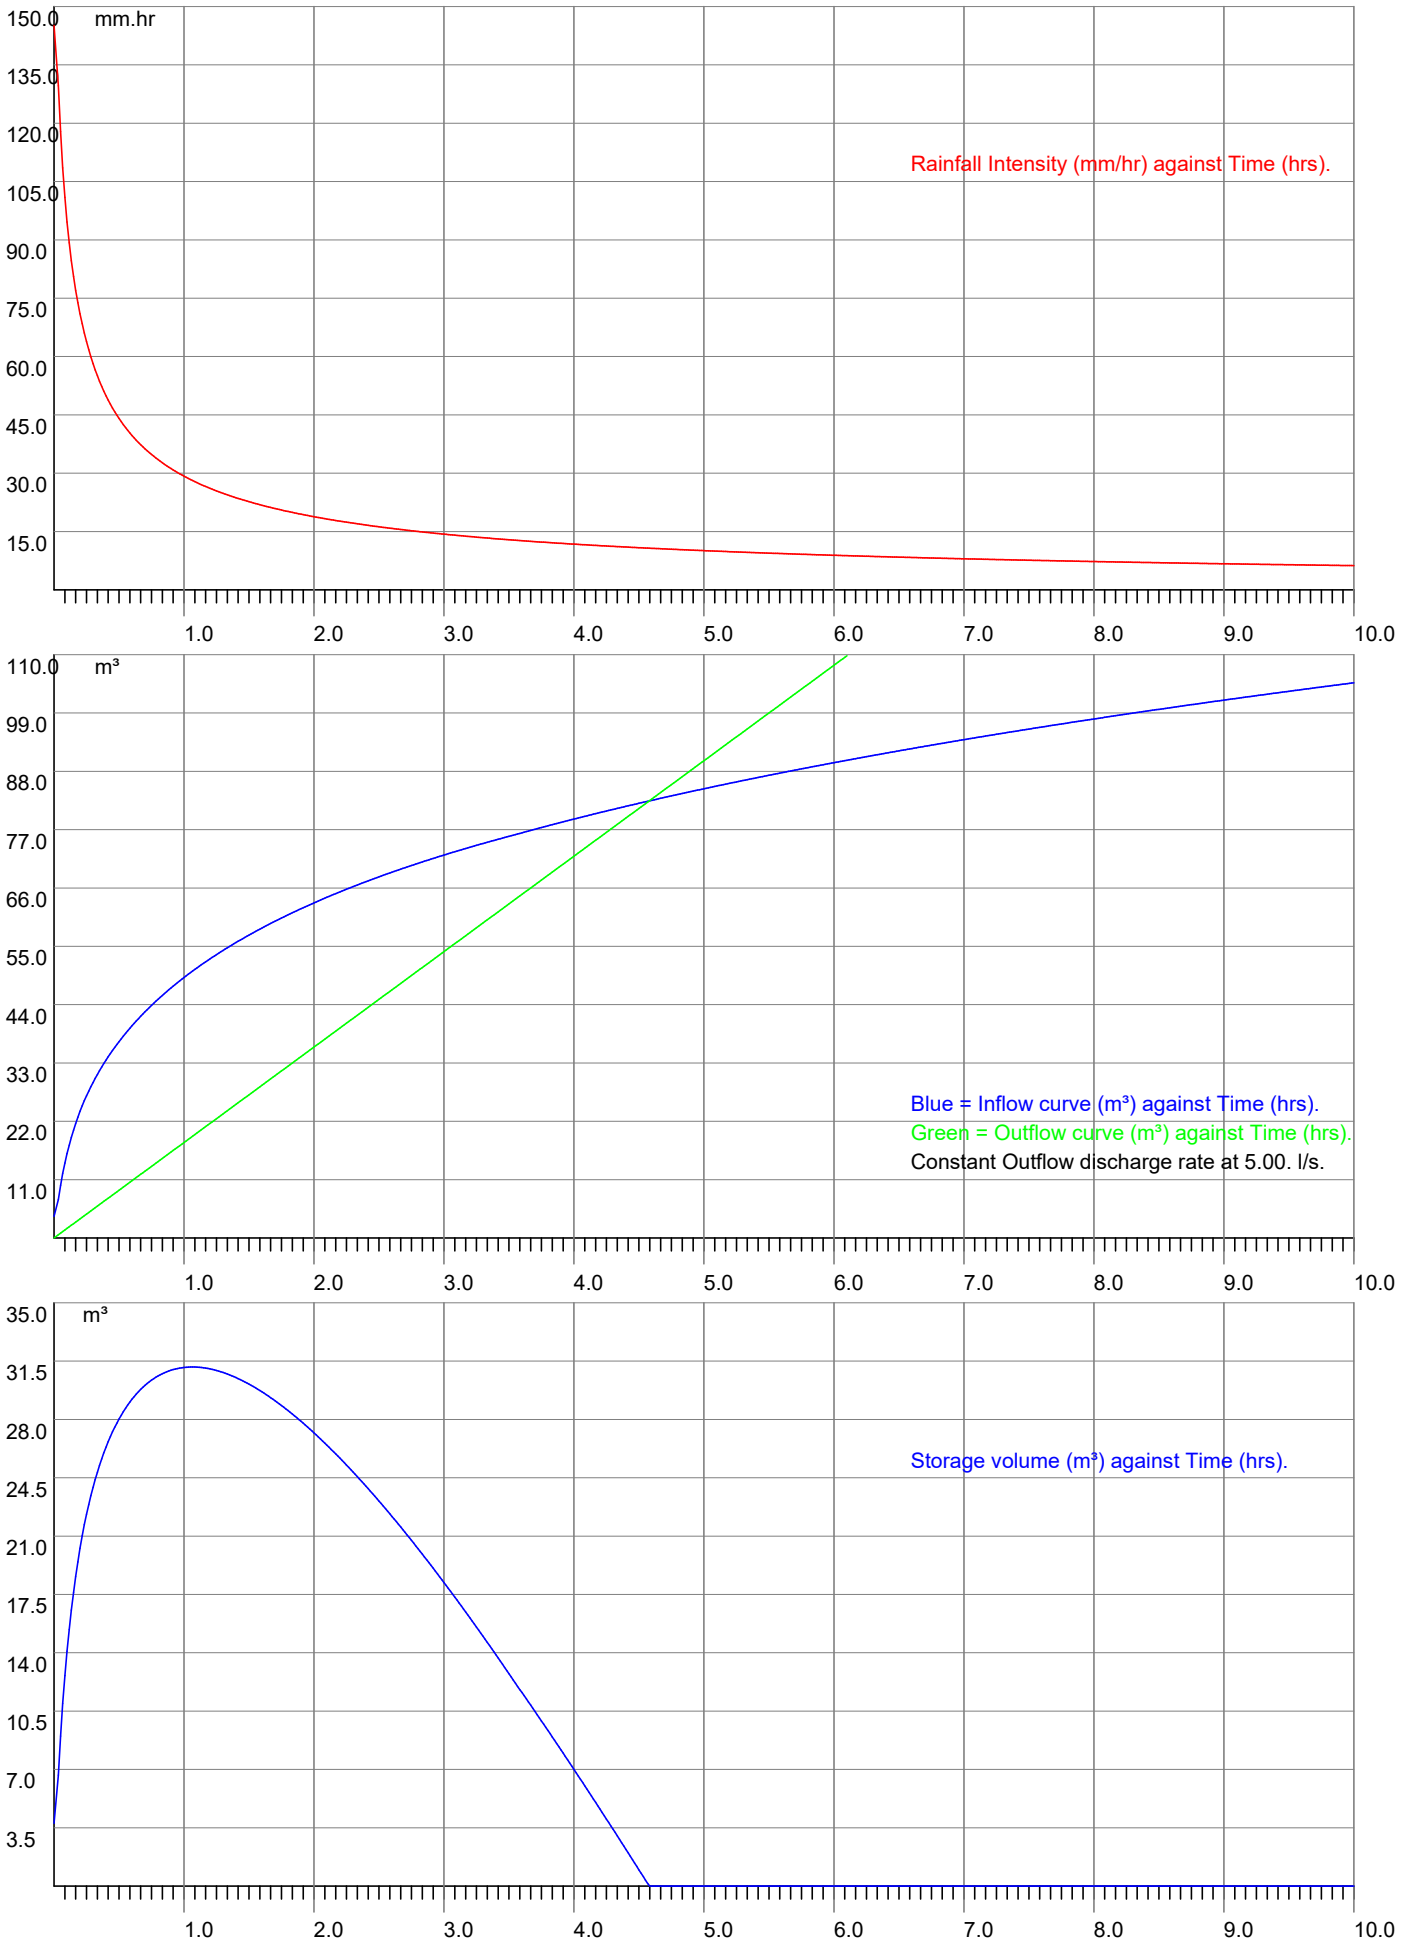



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>4</b>   |         |          |
| Date <b>31/03/20</b> |         |          |
| By                   | Checked | Reviewed |

Project **Brown Street, Littleborough**  
Title **Peak Flow Storage - 1 in 30 year**

### Explanatory notes for Peak Flow Storage

- 1) This system uses the rainfall intensity/ duration curve calculated using either the Wallingford or FEH method as selected.
- 2) The balance is calculated from the inflow minus the outflow.
- 3) The storage volume is the maximum value of the balance curve.
- 4) This method was described by Davis (1963) - see Butler & Davies, 2nd edition, p294
- 5) References to 'storm duration' relate only to the hydrograph method (qv).
- 6) There are always 600 steps in the calculation process, thus a 'run' time of 10 hours will be sampled every minute,

### Explanatory notes for Hydrograph Storage

- 1) The user has the choice of Summer or Winter curves
- 2) The mean intensity varies with the duration of the storm curve
- 3) There are always 120 steps in the calculation process, irrespective of storm duration.
- 4) The balance is calculated from the inflow minus the outflow.
- 5) The storage volume is the sum of the balance values for each step.
- 6) Varying durations should be tried to find the maximum storage value - this can be narrowed down very closely.

\*Modelling using the flow characteristics of the restrictor is available using Vortex Control modelling function. Please be aware that this function needs the full design data file to function.

### Why do the two methods give different results?

The rainfall characteristics for each method are very different.

The Peak flow (using the Intensity/Duration/Frequency curve) does not model the actual rainfall. This curve is joined points which represent the mean intensity of a storm at a given duration i.e. a value of 19.5 mm/hr for a 60 minute storm indicates that over the sixty minute period, the mean intensity was 19.5 mm/hr. The calculation method samples the IDF curve for a given location and frequency (Return Period) and calculates the storage for that rate and duration less the outflow volume. The maximum value is displayed as the 'worst case' storage.

The hydrograph method uses a standard curve for either Winter or Summer storms. Traditionally these are symmetrical about the central peak. UK rainfall does not fit into this convenient curve, so the calculations are dealing with a stylised set of data. The mean intensity for the storm is calculated from the IDF curve and applied to the curve data, calculating the storage for that step less the outflow volume. The final storage volume is the sum of the storage for all the steps.

It can be seen that these two methods are very different, and the user may have the choice of which result to use. This is not an exact science, though is often treated as such by those that do not understand the principles of the calculations.



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no. **1**

Date **31/03/20**

Project **Brown Street, Littleborough**

Title **Peak Flow Storage - 1 in100 year + 20% Climate Change**

By

Checked

Reviewed

### Data:-

#### FSR Hydrology:-

Location = Littleborough

M5-60 (mm) = 19

Soil index = 0.30

Return period = 100

UCWI = 117.8

Grid reference = SD8913

r = 0.28

SAAR (mm/yr) = 1150

WRAP = 2

Climate change = 20

i) Very permeable soils with shallow ground water;

ii) Permeable soils over rock or fragipan, commonly on slopes in western Britain associated with smaller areas of less permeable wet soils; The layer is low in organic matter, mottled and (fragipan - a natural subsurface horizon having a higher bulk density than the solum above. Seemingly cemented when dry but showing moderate to weak brittleness when moist. Slowly or very slowly permeable to water. It is found in profiles of either cultivated or virgin soils but not in calcareous material).

iii) Moderately permeable soils, some with slowly permeable subsoils.

Runoff factor (RF) = 37.0, calculated from:-

Runoff factor =  $(0.829 \times \text{PIMP}) + (25 \times \text{SOIL}) + (0.078 \times \text{UCWI}) - 20.7$

where

PIMP = Impervious Area\*100/(Impervious Area+Pervious Area)

UCWI = Calculated value for Wetness Index

### Design data:-

Imperv. area = 2100 m<sup>2</sup>

Total area (TA) = 4200 m<sup>2</sup>

Allowed discharge rate = 5.000 l/s

Additional flow = 0.00 l/s

Pervious area = 2100 m<sup>2</sup>

Equiv area = 1554 m<sup>2</sup> (TA x RF).

Areal reduction factor = 1.000

Climate change factor = 20

### Calculated data:-

Time to max = 110.0 mins

Rainfall at max = 31.41 mm/hr

Pipeline storage = 0.0 m<sup>3</sup>

Offline storage = 0.0 m<sup>3</sup>

Calculated storage volume = 63.7 m<sup>3</sup>

Allowed discharge rate = 5.000 l/s

Available MH storage = 0.0 m<sup>3</sup>

### Fixed 6 hour data:-

Rainfall event = 6 hours

Rainfall rate = 13.00 mm/hr

Calculated storage volume = 28.7 m<sup>3</sup>

Allowed discharge rate = 5.000 l/s

### Rainfall intensities calculated using the Wallingford Procedure

### Storage lengths for initial calculation (x 1.1, 1.2, 1.3 or 1.5 as above if required) :-

| Diam | Len    | Diam | Len  | Ovoid      | Len   | Box culvert | Len   |
|------|--------|------|------|------------|-------|-------------|-------|
| 100  | 8116.7 | 1125 | 64.1 | 400 x 600  | 354.1 | 500 x 500   | 254.9 |
| 150  | 3607.4 | 1200 | 56.4 | 600 x 900  | 154.2 | 500 x 750   | 170.0 |
| 225  | 1603.3 | 1275 | 49.9 | 800 x 1200 | 86.7  | 500 x 1000  | 127.5 |
| 300  | 901.9  | 1350 | 44.5 |            |       | 750 x 1000  | 85.0  |
| 375  | 577.2  | 1425 | 40.0 |            |       | 750 x 1200  | 70.8  |
| 450  | 400.8  | 1500 | 36.1 |            |       | 750 x 1500  | 56.7  |
| 525  | 294.5  | 1575 | 32.7 |            |       | 1000 x 1000 | 63.7  |
| 600  | 225.5  | 1650 | 29.8 |            |       | 1000 x 1200 | 53.1  |
| 675  | 178.1  | 1725 | 27.3 |            |       | 1000 x 1500 | 42.5  |
| 750  | 144.3  | 1800 | 25.1 |            |       | 1000 x 1800 | 35.4  |
| 825  | 119.3  | 1875 | 23.1 |            |       | 1000 x 2000 | 31.9  |
| 900  | 100.2  | 1950 | 21.3 |            |       | 1500 x 1500 | 28.3  |
| 975  | 85.4   | 2025 | 19.8 |            |       | 1500 x 1800 | 23.6  |
| 1050 | 73.6   | 2100 | 18.4 |            |       | 1500 x 2000 | 21.2  |



MasterDrain  
SW

Data:-

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no. **2**

Date **31/03/20**

Project **Brown Street, Littleborough**

By

Checked

Reviewed

Title **Peak Flow Storage - 1 in100 year + 20% Climate Change**

| Time<br>(mins) | Rain<br>mm/hr | Inflow<br>(m3) | Outflow<br>(m3) | Balance<br>(m3) |
|----------------|---------------|----------------|-----------------|-----------------|
| 10             | 118.0         | 33.047         | 3.000           | 30.047          |
| 20             | 86.0          | 47.958         | 6.000           | 41.958          |
| 30             | 69.0          | 57.949         | 9.000           | 48.949          |
| 40             | 59.0          | 65.671         | 12.000          | 53.671          |
| 50             | 51.0          | 72.023         | 15.000          | 57.023          |
| 60             | 46.0          | 77.441         | 18.000          | 59.441          |
| 70             | 42.0          | 82.174         | 21.000          | 61.174          |
| 80             | 39.0          | 86.379         | 24.000          | 62.379          |
| 90             | 36.0          | 90.160         | 27.000          | 63.160          |
| 100            | 33.0          | 93.594         | 30.000          | 63.594          |
| 110            | 31.0          | 96.736         | 33.000          | 63.736          |
| 120            | 30.0          | 99.629         | 36.000          | 63.629          |
| 130            | 28.0          | 102.304        | 39.000          | 63.304          |
| 140            | 27.0          | 104.791        | 42.000          | 62.791          |
| 150            | 26.0          | 107.109        | 45.000          | 62.109          |
| 160            | 24.0          | 109.276        | 48.000          | 61.276          |
| 170            | 23.0          | 111.309        | 51.000          | 60.309          |
| 180            | 22.0          | 113.220        | 54.000          | 59.220          |
| 190            | 22.0          | 115.019        | 57.000          | 58.019          |
| 200            | 21.0          | 116.717        | 60.000          | 56.717          |
| 210            | 20.0          | 118.320        | 63.000          | 55.320          |
| 220            | 19.0          | 119.956        | 66.000          | 53.956          |
| 230            | 19.0          | 121.556        | 69.000          | 52.556          |
| 240            | 18.0          | 123.103        | 72.000          | 51.103          |
| 250            | 18.0          | 124.599        | 75.000          | 49.599          |
| 260            | 17.0          | 126.050        | 78.000          | 48.050          |
| 270            | 17.0          | 127.458        | 81.000          | 46.458          |
| 280            | 16.0          | 128.826        | 84.000          | 44.826          |
| 290            | 16.0          | 130.156        | 87.000          | 43.156          |
| 300            | 16.0          | 131.450        | 90.000          | 41.450          |
| 310            | 15.0          | 132.711        | 93.000          | 39.711          |
| 320            | 15.0          | 133.940        | 96.000          | 37.940          |
| 330            | 15.0          | 135.140        | 99.000          | 36.140          |
| 340            | 14.0          | 136.311        | 102.000         | 34.311          |
| 350            | 14.0          | 137.456        | 105.000         | 32.456          |
| 360            | 14.0          | 138.576        | 108.000         | 30.576          |
| 370            | 13.0          | 139.671        | 111.000         | 28.671          |
| 380            | 13.0          | 140.743        | 114.000         | 26.743          |
| 390            | 13.0          | 141.793        | 117.000         | 24.793          |
| 400            | 13.0          | 142.822        | 120.000         | 22.822          |
| 410            | 13.0          | 143.831        | 123.000         | 20.831          |
| 420            | 12.0          | 144.821        | 126.000         | 18.821          |
| 430            | 12.0          | 145.792        | 129.000         | 16.792          |
| 440            | 12.0          | 146.746        | 132.000         | 14.746          |
| 450            | 12.0          | 147.683        | 135.000         | 12.683          |
| 460            | 12.0          | 148.604        | 138.000         | 10.604          |
| 470            | 11.0          | 149.508        | 141.000         | 8.508           |
| 480            | 11.0          | 150.398        | 144.000         | 6.398           |
| 490            | 11.0          | 151.273        | 147.000         | 4.273           |
| 500            | 11.0          | 152.135        | 150.000         | 2.135           |
| 510            | 11.0          | 152.982        | 153.000         | 0.000           |
| 520            | 11.0          | 153.817        | 156.000         | 0.000           |
| 530            | 10.0          | 154.639        | 159.000         | 0.000           |
| 540            | 10.0          | 155.449        | 162.000         | 0.000           |
| 550            | 10.0          | 156.247        | 165.000         | 0.000           |
| 560            | 10.0          | 157.034        | 168.000         | 0.000           |
| 570            | 10.0          | 157.809        | 171.000         | 0.000           |
| 580            | 10.0          | 158.574        | 174.000         | 0.000           |
| 590            | 10.0          | 159.328        | 177.000         | 0.000           |
| 600            | 10.0          | 160.073        | 180.000         | 0.000           |

Storage volume (m³) = 63.7 m³



MasterDrain  
SW

The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no.

3

Date

31/03/20

By

Checked


Reviewed

Project

Brown Street, Littleborough

Title

Peak Flow Storage - 1 in100 year + 20% Climate Change

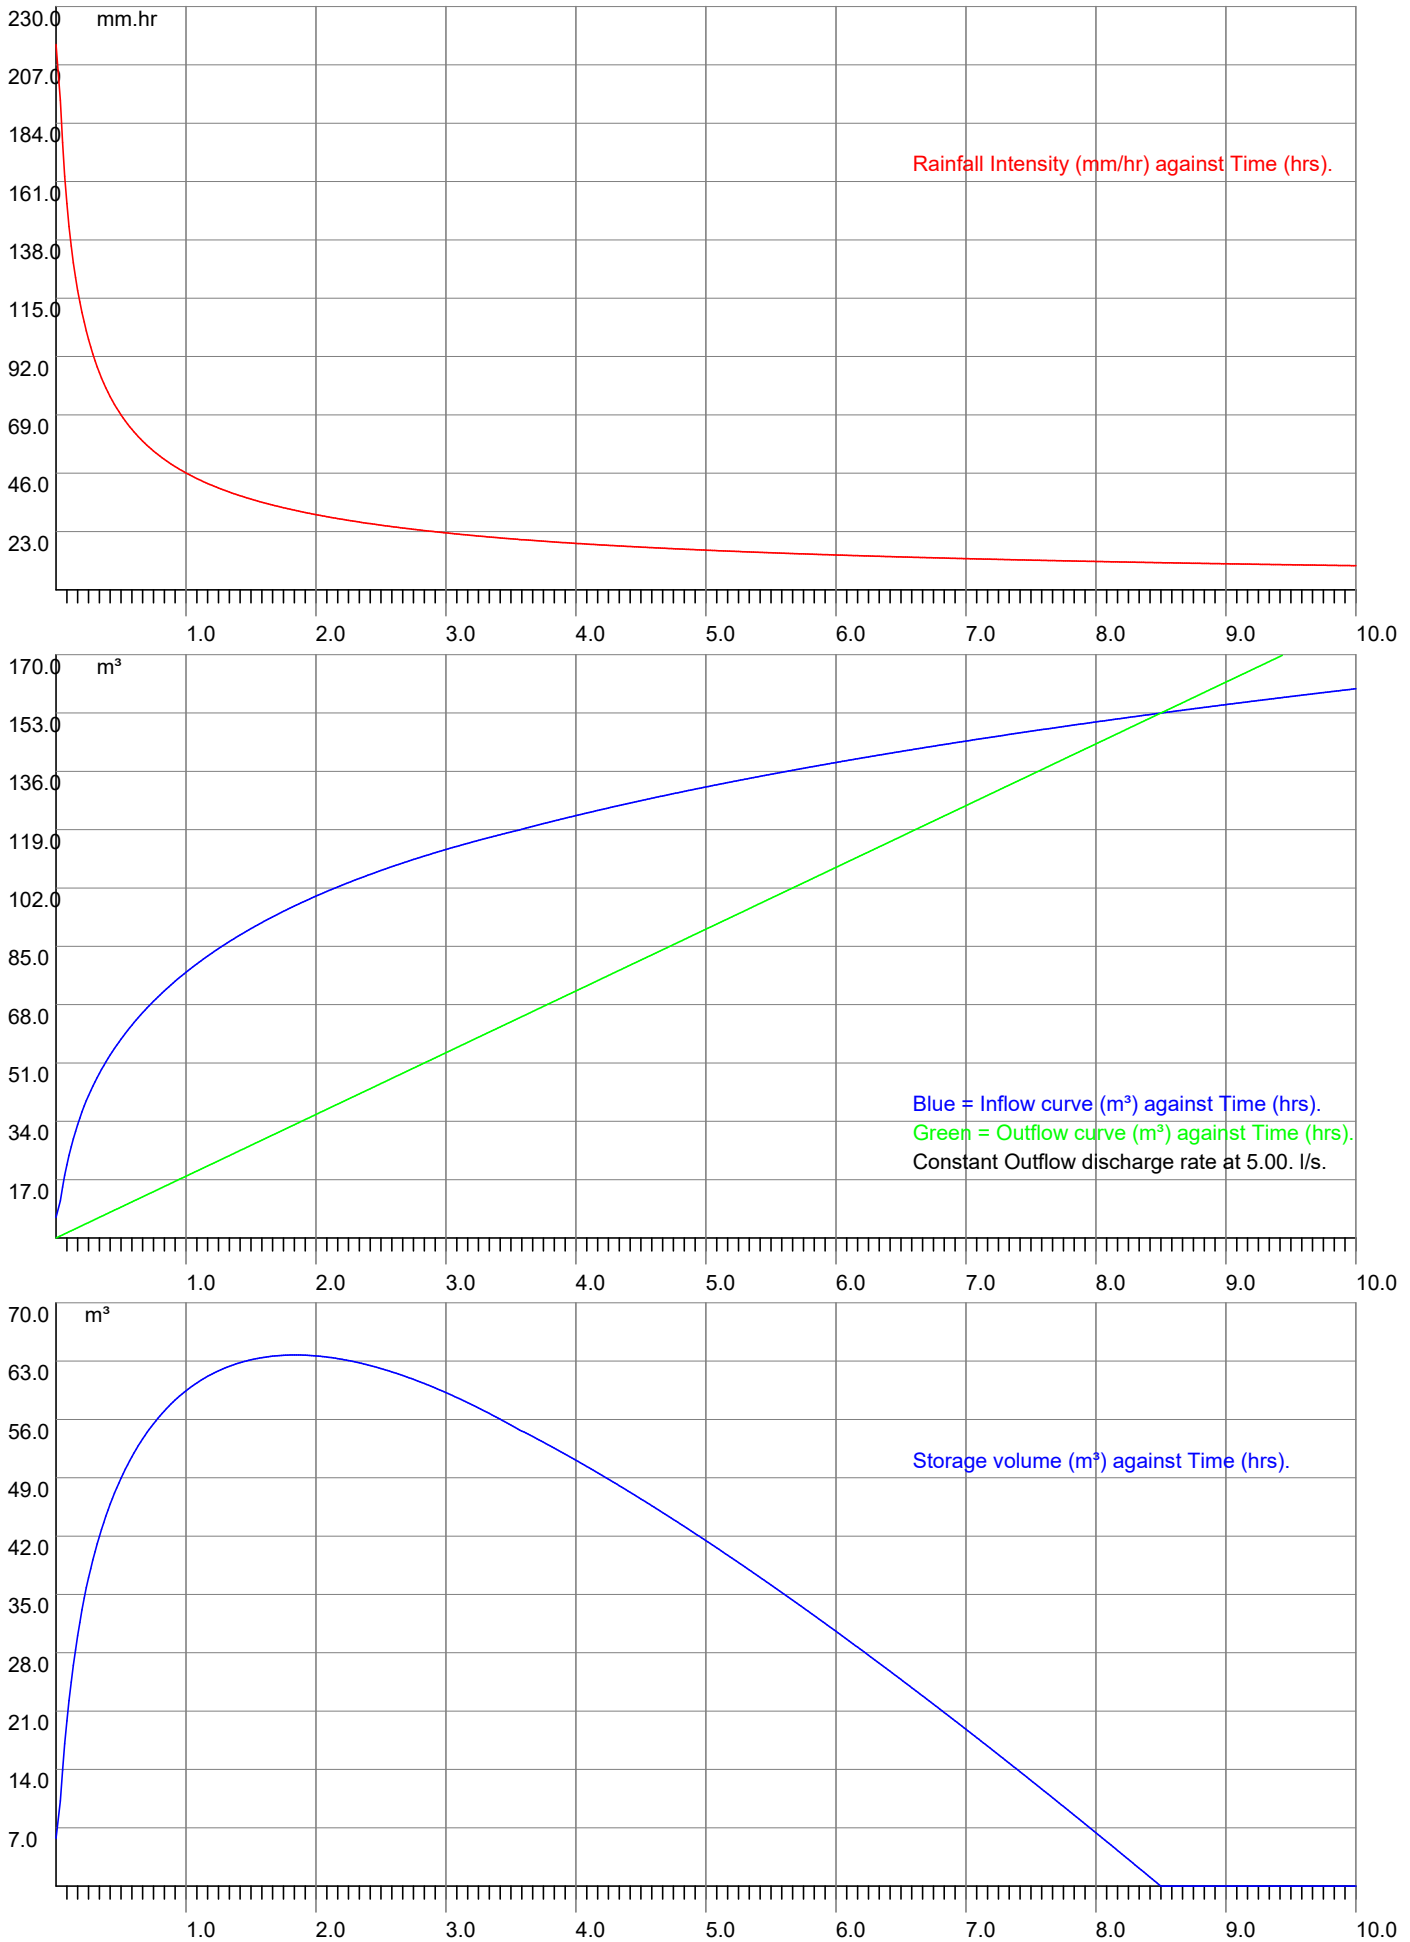



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>4</b>   |         |          |
| Date <b>31/03/20</b> |         |          |
| By                   | Checked | Reviewed |

|         |                                                              |
|---------|--------------------------------------------------------------|
| Project | <b>Brown Street, Littleborough</b>                           |
| Title   | <b>Peak Flow Storage - 1 in100 year + 20% Climate Change</b> |

### Explanatory notes for Peak Flow Storage

- 1) This system uses the rainfall intensity/ duration curve calculated using either the Wallingford or FEH method as selected.
- 2) The balance is calculated from the inflow minus the outflow.
- 3) The storage volume is the maximum value of the balance curve.
- 4) This method was described by Davis (1963) - see Butler & Davies, 2nd edition, p294
- 5) References to 'storm duration' relate only to the hydrograph method (qv).
- 6) There are always 600 steps in the calculation process, thus a 'run' time of 10 hours will be sampled every minute,

### Explanatory notes for Hydrograph Storage

- 1) The user has the choice of Summer or Winter curves
- 2) The mean intensity varies with the duration of the storm curve
- 3) There are always 120 steps in the calculation process, irrespective of storm duration.
- 4) The balance is calculated from the inflow minus the outflow.
- 5) The storage volume is the sum of the balance values for each step.
- 6) Varying durations should be tried to find the maximum storage value - this can be narrowed down very closely.

\*Modelling using the flow characteristics of the restrictor is available using Vortex Control modelling function. Please be aware that this function needs the full design data file to function.

### Why do the two methods give different results?

The rainfall characteristics for each method are very different.

The Peak flow (using the Intensity/Duration/Frequency curve) does not model the actual rainfall. This curve is joined points which represent the mean intensity of a storm at a given duration i.e. a value of 19.5 mm/hr for a 60 minute storm indicates that over the sixty minute period, the mean intensity was 19.5 mm/hr. The calculation method samples the IDF curve for a given location and frequency (Return Period) and calculates the storage for that rate and duration less the outflow volume. The maximum value is displayed as the 'worst case' storage.

The hydrograph method uses a standard curve for either Winter or Summer storms. Traditionally these are symmetrical about the central peak. UK rainfall does not fit into this convenient curve, so the calculations are dealing with a stylised set of data. The mean intensity for the storm is calculated from the IDF curve and applied to the curve data, calculating the storage for that step less the outflow volume. The final storage volume is the sum of the storage for all the steps.

It can be seen that these two methods are very different, and the user may have the choice of which result to use. This is not an exact science, though is often treated as such by those that do not understand the principles of the calculations.



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>1</b>   |         |          |
| Date <b>31/03/20</b> |         |          |
| By                   | Checked | Reviewed |

|         |                                                               |
|---------|---------------------------------------------------------------|
| Project | <b>Brown Street, Littleborough</b>                            |
| Title   | <b>Peak Flow Storage - 1 in 100 year + 40% Climate Change</b> |

### Data:-

#### FSR Hydrology:-

Location = Littleborough

M5-60 (mm) = 19

Soil index = 0.30

Return period = 100

UCWI = 117.8

Grid reference = SD8913

r = 0.28

SAAR (mm/yr) = 1150

WRAP = 2

Climate change = 40

i) Very permeable soils with shallow ground water;

ii) Permeable soils over rock or fragipan, commonly on slopes in western Britain associated with smaller areas of less permeable wet soils; The layer is low in organic matter, mottled and (fragipan - a natural subsurface horizon having a higher bulk density than the solum above. Seemingly cemented when dry but showing moderate to weak brittleness when moist. Slowly or very slowly permeable to water. It is found in profiles of either cultivated or virgin soils but not in calcareous material).

iii) Moderately permeable soils, some with slowly permeable subsoils.

Runoff factor (RF) = 37.0, calculated from:-

Runoff factor =  $(0.829 \times \text{PIMP}) + (25 \times \text{SOIL}) + (0.078 \times \text{UCWI}) - 20.7$

where

PIMP = Impervious Area \* 100 / (Impervious Area + Pervious Area)

UCWI = Calculated value for Wetness Index

### Design data:-

Imperv. area = 2100 m<sup>2</sup>

Total area (TA) = 4200 m<sup>2</sup>

Allowed discharge rate = 5.000 l/s

Additional flow = 0.00 l/s

Pervious area = 2100 m<sup>2</sup>

Equiv area = 1554 m<sup>2</sup> (TA x RF).

Areal reduction factor = 1.000

Climate change factor = 40

### Calculated data:-

Time to max = 130.0 mins

Rainfall at max = 32.79 mm/hr

Pipeline storage = 0.0 m<sup>3</sup>

Offline storage = 0.0 m<sup>3</sup>

Calculated storage volume = 80.4 m<sup>3</sup>

Allowed discharge rate = 5.000 l/s

Available MH storage = 0.0 m<sup>3</sup>

### Fixed 6 hour data:-

Rainfall event = 6 hours

Rainfall rate = 16.00 mm/hr

Calculated storage volume = 51.9 m<sup>3</sup>

Allowed discharge rate = 5.000 l/s

### Rainfall intensities calculated using the Wallingford Procedure

### Storage lengths for initial calculation (x 1.1, 1.2, 1.3 or 1.5 as above if required) :-

| Diam | Len     | Diam | Len  | Ovoid      | Len   | Box culvert | Len   |
|------|---------|------|------|------------|-------|-------------|-------|
| 100  | 10233.1 | 1125 | 80.9 | 400 x 600  | 446.4 | 500 x 500   | 321.4 |
| 150  | 4548.0  | 1200 | 71.1 | 600 x 900  | 194.4 | 500 x 750   | 214.3 |
| 225  | 2021.3  | 1275 | 62.9 | 800 x 1200 | 109.3 | 500 x 1000  | 160.7 |
| 300  | 1137.0  | 1350 | 56.1 |            |       | 750 x 1000  | 107.1 |
| 375  | 727.7   | 1425 | 50.4 |            |       | 750 x 1200  | 89.3  |
| 450  | 505.3   | 1500 | 45.5 |            |       | 750 x 1500  | 71.4  |
| 525  | 371.3   | 1575 | 41.3 |            |       | 1000 x 1000 | 80.4  |
| 600  | 284.3   | 1650 | 37.6 |            |       | 1000 x 1200 | 67.0  |
| 675  | 224.6   | 1725 | 34.4 |            |       | 1000 x 1500 | 53.6  |
| 750  | 181.9   | 1800 | 31.6 |            |       | 1000 x 1800 | 44.6  |
| 825  | 150.3   | 1875 | 29.1 |            |       | 1000 x 2000 | 40.2  |
| 900  | 126.3   | 1950 | 26.9 |            |       | 1500 x 1500 | 35.7  |
| 975  | 107.6   | 2025 | 25.0 |            |       | 1500 x 1800 | 29.8  |
| 1050 | 92.8    | 2100 | 23.2 |            |       | 1500 x 2000 | 26.8  |



MasterDrain  
SW

Data:-

## The LK Group

www.thelkgroup.com


Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>2</b>   |         |          |
| Date <b>31/03/20</b> |         |          |
| By                   | Checked | Reviewed |

|         |                                                               |  |
|---------|---------------------------------------------------------------|--|
| Project | <b>Brown Street, Littleborough</b>                            |  |
| Title   | <b>Peak Flow Storage - 1 in 100 year + 40% Climate Change</b> |  |

| Time<br>(mins) | Rain<br>mm/hr | Inflow<br>(m3) | Outflow<br>(m3) | Balance<br>(m3) |
|----------------|---------------|----------------|-----------------|-----------------|
| 10             | 138.0         | 38.554         | 3.000           | 35.554          |
| 20             | 100.0         | 55.952         | 6.000           | 49.952          |
| 30             | 80.0          | 67.607         | 9.000           | 58.607          |
| 40             | 68.0          | 76.617         | 12.000          | 64.617          |
| 50             | 60.0          | 84.027         | 15.000          | 69.027          |
| 60             | 54.0          | 90.348         | 18.000          | 72.348          |
| 70             | 49.0          | 95.870         | 21.000          | 74.870          |
| 80             | 45.0          | 100.775        | 24.000          | 76.775          |
| 90             | 42.0          | 105.187        | 27.000          | 78.187          |
| 100            | 39.0          | 109.194        | 30.000          | 79.194          |
| 110            | 37.0          | 112.859        | 33.000          | 79.859          |
| 120            | 35.0          | 116.233        | 36.000          | 80.233          |
| 130            | 33.0          | 119.355        | 39.000          | 80.355          |
| 140            | 31.0          | 122.256        | 42.000          | 80.256          |
| 150            | 30.0          | 124.960        | 45.000          | 79.960          |
| 160            | 28.0          | 127.489        | 48.000          | 79.489          |
| 170            | 27.0          | 129.861        | 51.000          | 78.861          |
| 180            | 26.0          | 132.090        | 54.000          | 78.090          |
| 190            | 25.0          | 134.189        | 57.000          | 77.189          |
| 200            | 24.0          | 136.169        | 60.000          | 76.169          |
| 210            | 23.0          | 138.040        | 63.000          | 75.040          |
| 220            | 23.0          | 139.948        | 66.000          | 73.948          |
| 230            | 22.0          | 141.815        | 69.000          | 72.815          |
| 240            | 21.0          | 143.620        | 72.000          | 71.620          |
| 250            | 21.0          | 145.366        | 75.000          | 70.366          |
| 260            | 20.0          | 147.059        | 78.000          | 69.059          |
| 270            | 20.0          | 148.701        | 81.000          | 67.701          |
| 280            | 19.0          | 150.297        | 84.000          | 66.297          |
| 290            | 19.0          | 151.848        | 87.000          | 64.848          |
| 300            | 18.0          | 153.358        | 90.000          | 63.358          |
| 310            | 18.0          | 154.829        | 93.000          | 61.829          |
| 320            | 17.0          | 156.264        | 96.000          | 60.264          |
| 330            | 17.0          | 157.663        | 99.000          | 58.663          |
| 340            | 17.0          | 159.030        | 102.000         | 57.030          |
| 350            | 16.0          | 160.366        | 105.000         | 55.366          |
| 360            | 16.0          | 161.671        | 108.000         | 53.671          |
| 370            | 16.0          | 162.949        | 111.000         | 51.949          |
| 380            | 15.0          | 164.200        | 114.000         | 50.200          |
| 390            | 15.0          | 165.425        | 117.000         | 48.425          |
| 400            | 15.0          | 166.626        | 120.000         | 46.626          |
| 410            | 15.0          | 167.803        | 123.000         | 44.803          |
| 420            | 14.0          | 168.958        | 126.000         | 42.958          |
| 430            | 14.0          | 170.091        | 129.000         | 41.091          |
| 440            | 14.0          | 171.204        | 132.000         | 39.204          |
| 450            | 14.0          | 172.297        | 135.000         | 37.297          |
| 460            | 13.0          | 173.371        | 138.000         | 35.371          |
| 470            | 13.0          | 174.426        | 141.000         | 33.426          |
| 480            | 13.0          | 175.465        | 144.000         | 31.465          |
| 490            | 13.0          | 176.486        | 147.000         | 29.486          |
| 500            | 13.0          | 177.490        | 150.000         | 27.490          |
| 510            | 12.0          | 178.479        | 153.000         | 25.479          |
| 520            | 12.0          | 179.453        | 156.000         | 23.453          |
| 530            | 12.0          | 180.412        | 159.000         | 21.412          |
| 540            | 12.0          | 181.357        | 162.000         | 19.357          |
| 550            | 12.0          | 182.288        | 165.000         | 17.288          |
| 560            | 12.0          | 183.206        | 168.000         | 15.206          |
| 570            | 12.0          | 184.111        | 171.000         | 13.111          |
| 580            | 11.0          | 185.003        | 174.000         | 11.003          |
| 590            | 11.0          | 185.883        | 177.000         | 8.883           |
| 600            | 11.0          | 186.751        | 180.000         | 6.751           |

Storage volume (m³) = 80.4 m³



MasterDrain  
SW

The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

Job No.

Sheet no.

3

Date

31/03/20

By

Checked


Reviewed

Project

Brown Street, Littleborough

Title

Peak Flow Storage - 1 in 100 year + 40% Climate Change

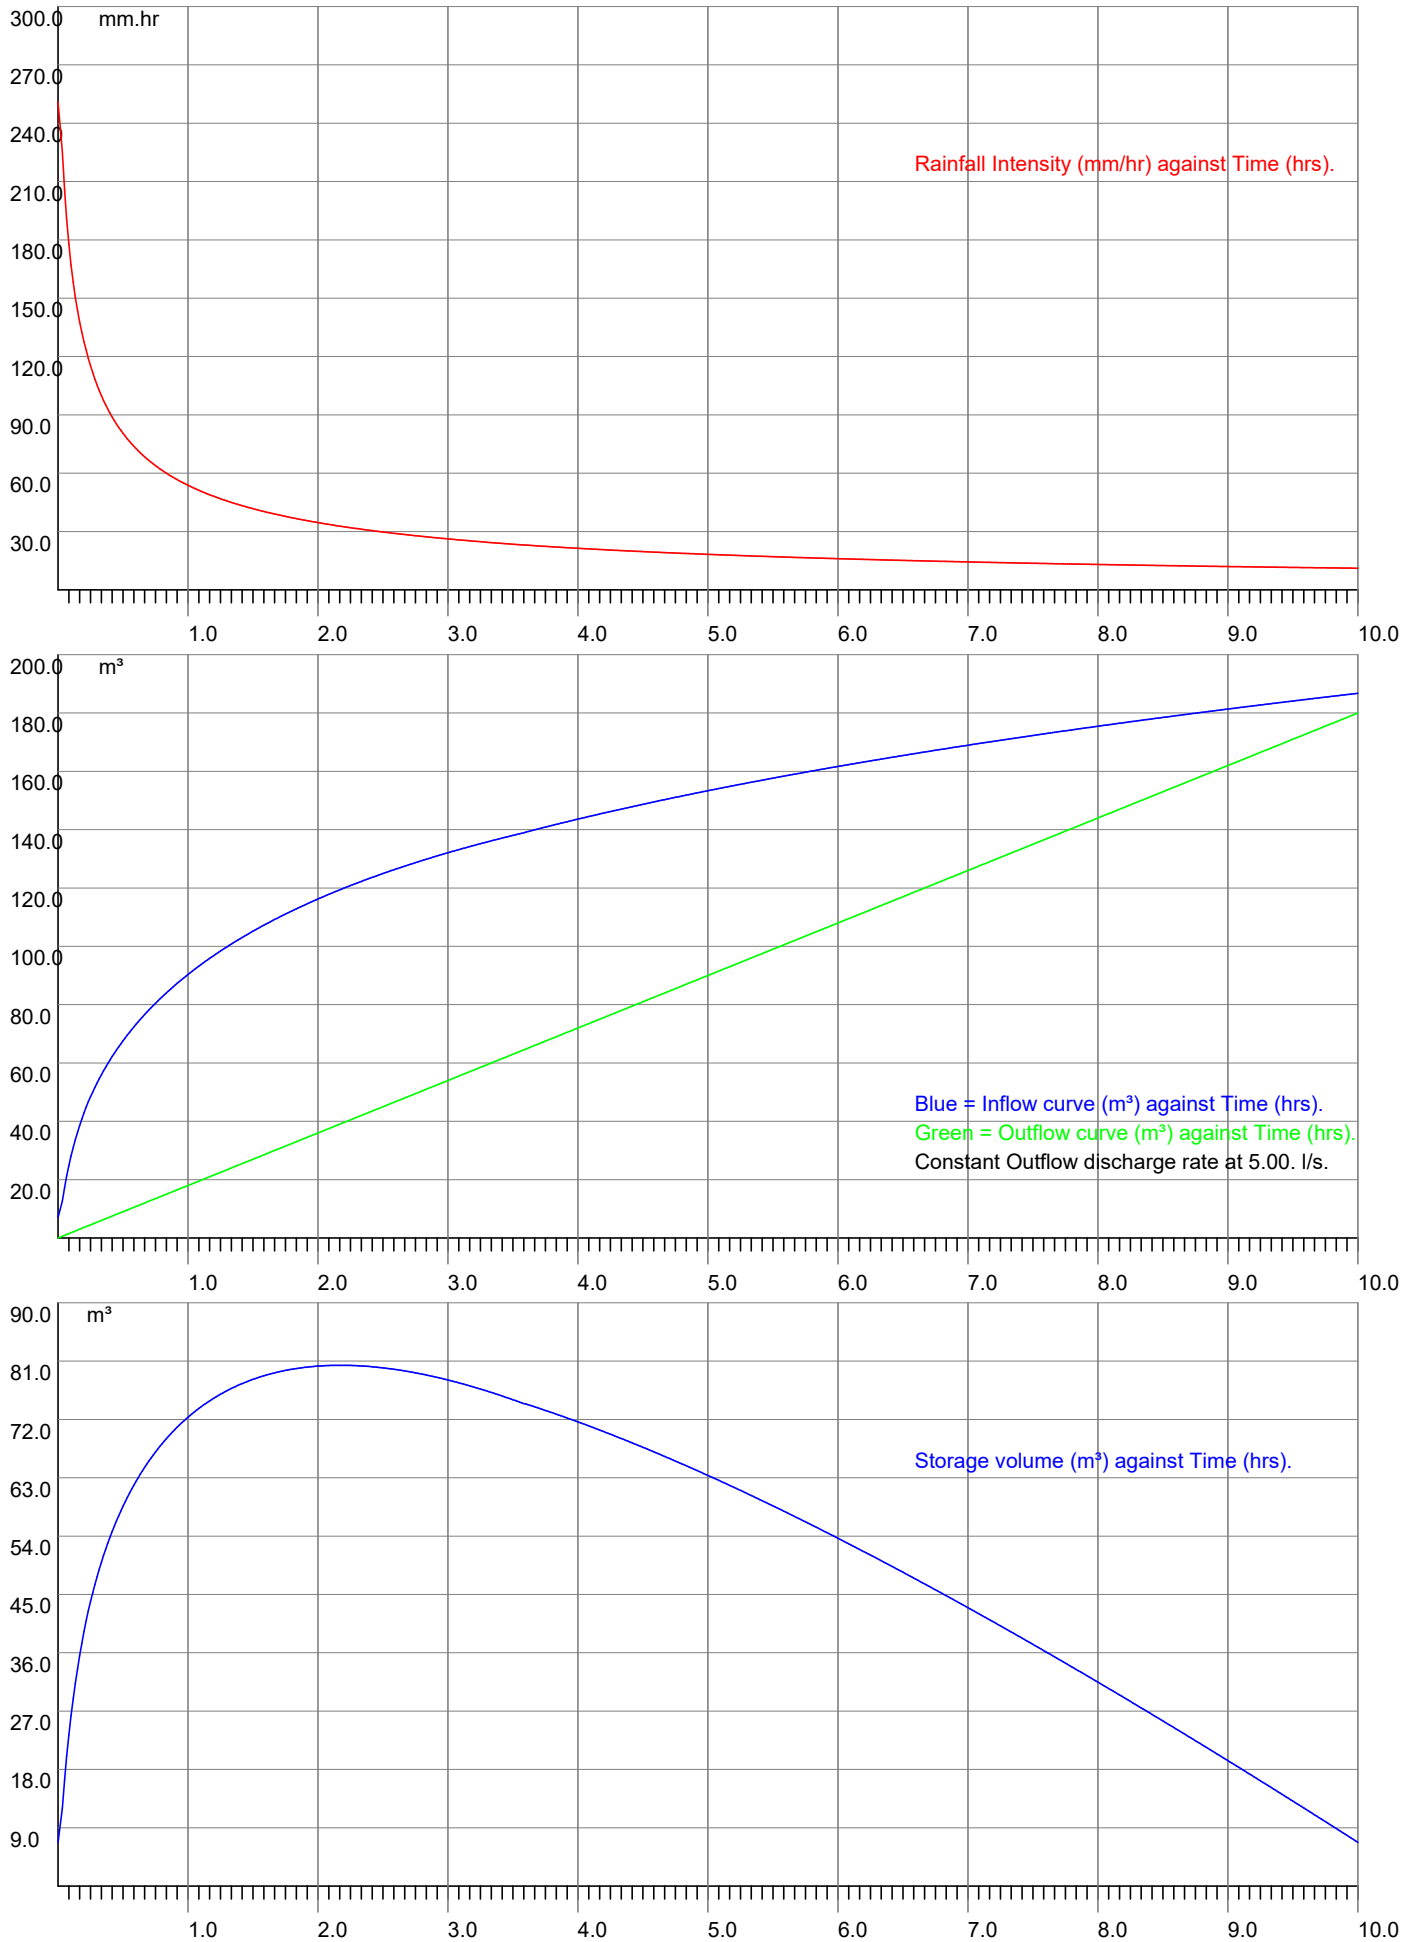



MasterDrain  
SW

## The LK Group

www.thelkgroup.com

Eton Business Park,  
Eton Hill Road,  
Radcliffe M26 2ZS  
Tel: 0161 763 7200  
email: m.jones@thelkgroup.com

|                      |         |          |
|----------------------|---------|----------|
| Job No.              |         |          |
| Sheet no. <b>4</b>   |         |          |
| Date <b>31/03/20</b> |         |          |
| By                   | Checked | Reviewed |

|         |                                                               |
|---------|---------------------------------------------------------------|
| Project | <b>Brown Street, Littleborough</b>                            |
| Title   | <b>Peak Flow Storage - 1 in 100 year + 40% Climate Change</b> |

### Explanatory notes for Peak Flow Storage

- 1) This system uses the rainfall intensity/ duration curve calculated using either the Wallingford or FEH method as selected.
- 2) The balance is calculated from the inflow minus the outflow.
- 3) The storage volume is the maximum value of the balance curve.
- 4) This method was described by Davis (1963) - see Butler & Davies, 2nd edition, p294
- 5) References to 'storm duration' relate only to the hydrograph method (qv).
- 6) There are always 600 steps in the calculation process, thus a 'run' time of 10 hours will be sampled every minute,

### Explanatory notes for Hydrograph Storage

- 1) The user has the choice of Summer or Winter curves
- 2) The mean intensity varies with the duration of the storm curve
- 3) There are always 120 steps in the calculation process, irrespective of storm duration.
- 4) The balance is calculated from the inflow minus the outflow.
- 5) The storage volume is the sum of the balance values for each step.
- 6) Varying durations should be tried to find the maximum storage value - this can be narrowed down very closely.

\*Modelling using the flow characteristics of the restrictor is available using Vortex Control modelling function. Please be aware that this function needs the full design data file to function.

### Why do the two methods give different results?

The rainfall characteristics for each method are very different.

The Peak flow (using the Intensity/Duration/Frequency curve) does not model the actual rainfall. This curve is joined points which represent the mean intensity of a storm at a given duration i.e. a value of 19.5 mm/hr for a 60 minute storm indicates that over the sixty minute period, the mean intensity was 19.5 mm/hr. The calculation method samples the IDF curve for a given location and frequency (Return Period) and calculates the storage for that rate and duration less the outflow volume. The maximum value is displayed as the 'worst case' storage.

The hydrograph method uses a standard curve for either Winter or Summer storms. Traditionally these are symmetrical about the central peak. UK rainfall does not fit into this convenient curve, so the calculations are dealing with a stylised set of data. The mean intensity for the storm is calculated from the IDF curve and applied to the curve data, calculating the storage for that step less the outflow volume. The final storage volume is the sum of the storage for all the steps.

It can be seen that these two methods are very different, and the user may have the choice of which result to use. This is not an exact science, though is often treated as such by those that do not understand the principles of the calculations.