
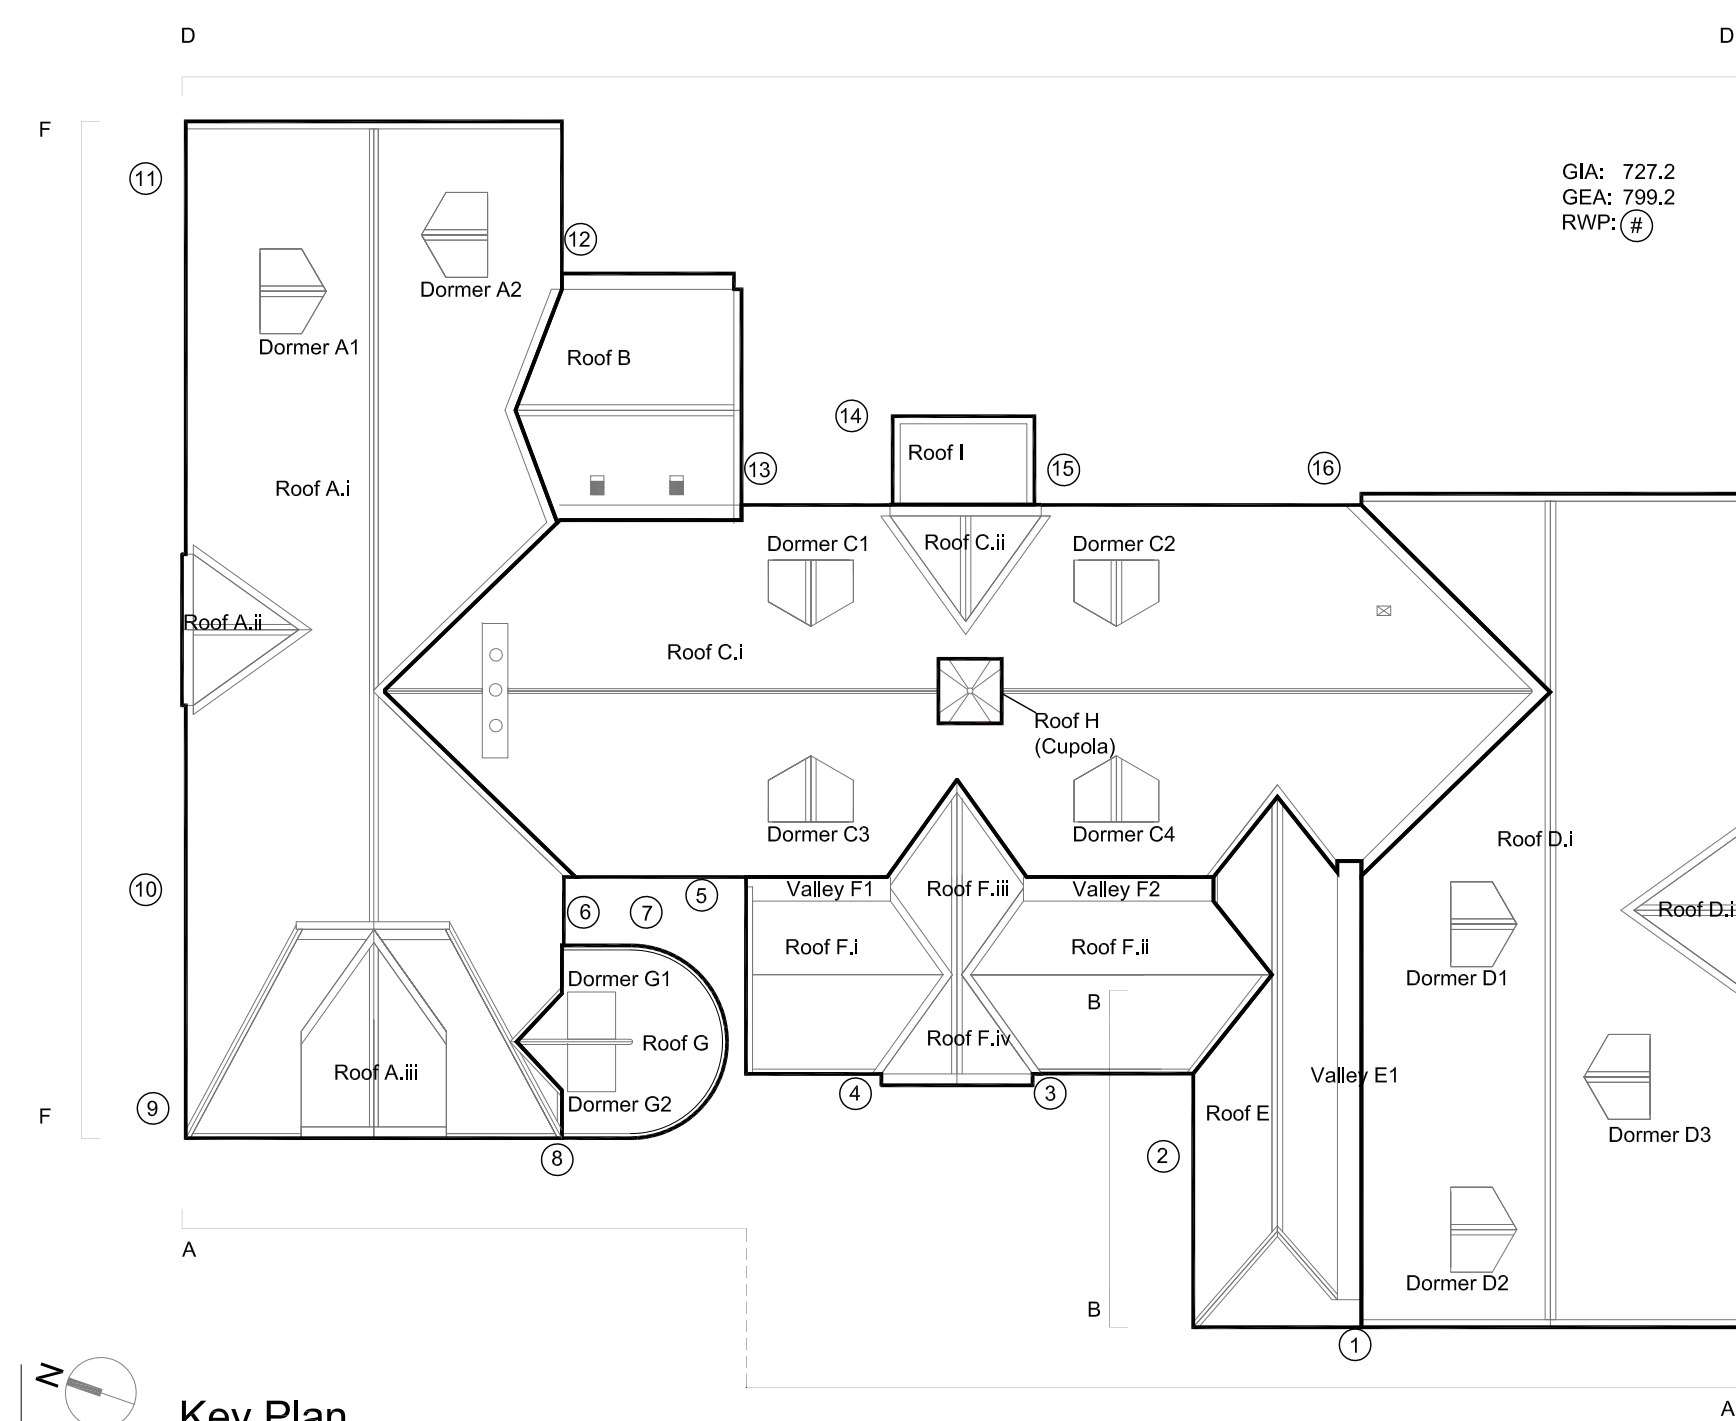


- notes:
1. DO NOT SCALE FROM THIS DRAWING - USE FIGURED DIMENSIONS ONLY.
 2. TO BE READ IN CONJUNCTION WITH ALL OTHER CONSULTANTS / SPECIALISTS DRAWINGS, REPORT ANY DISCREPANCIES BEFORE AFFECTED WORK COMMENCES.
 3. ALL SETTING OUT DIMENSIONS TO BE CHECKED ON SITE BY CONTRACTOR BEFORE WORK COMMENCES.

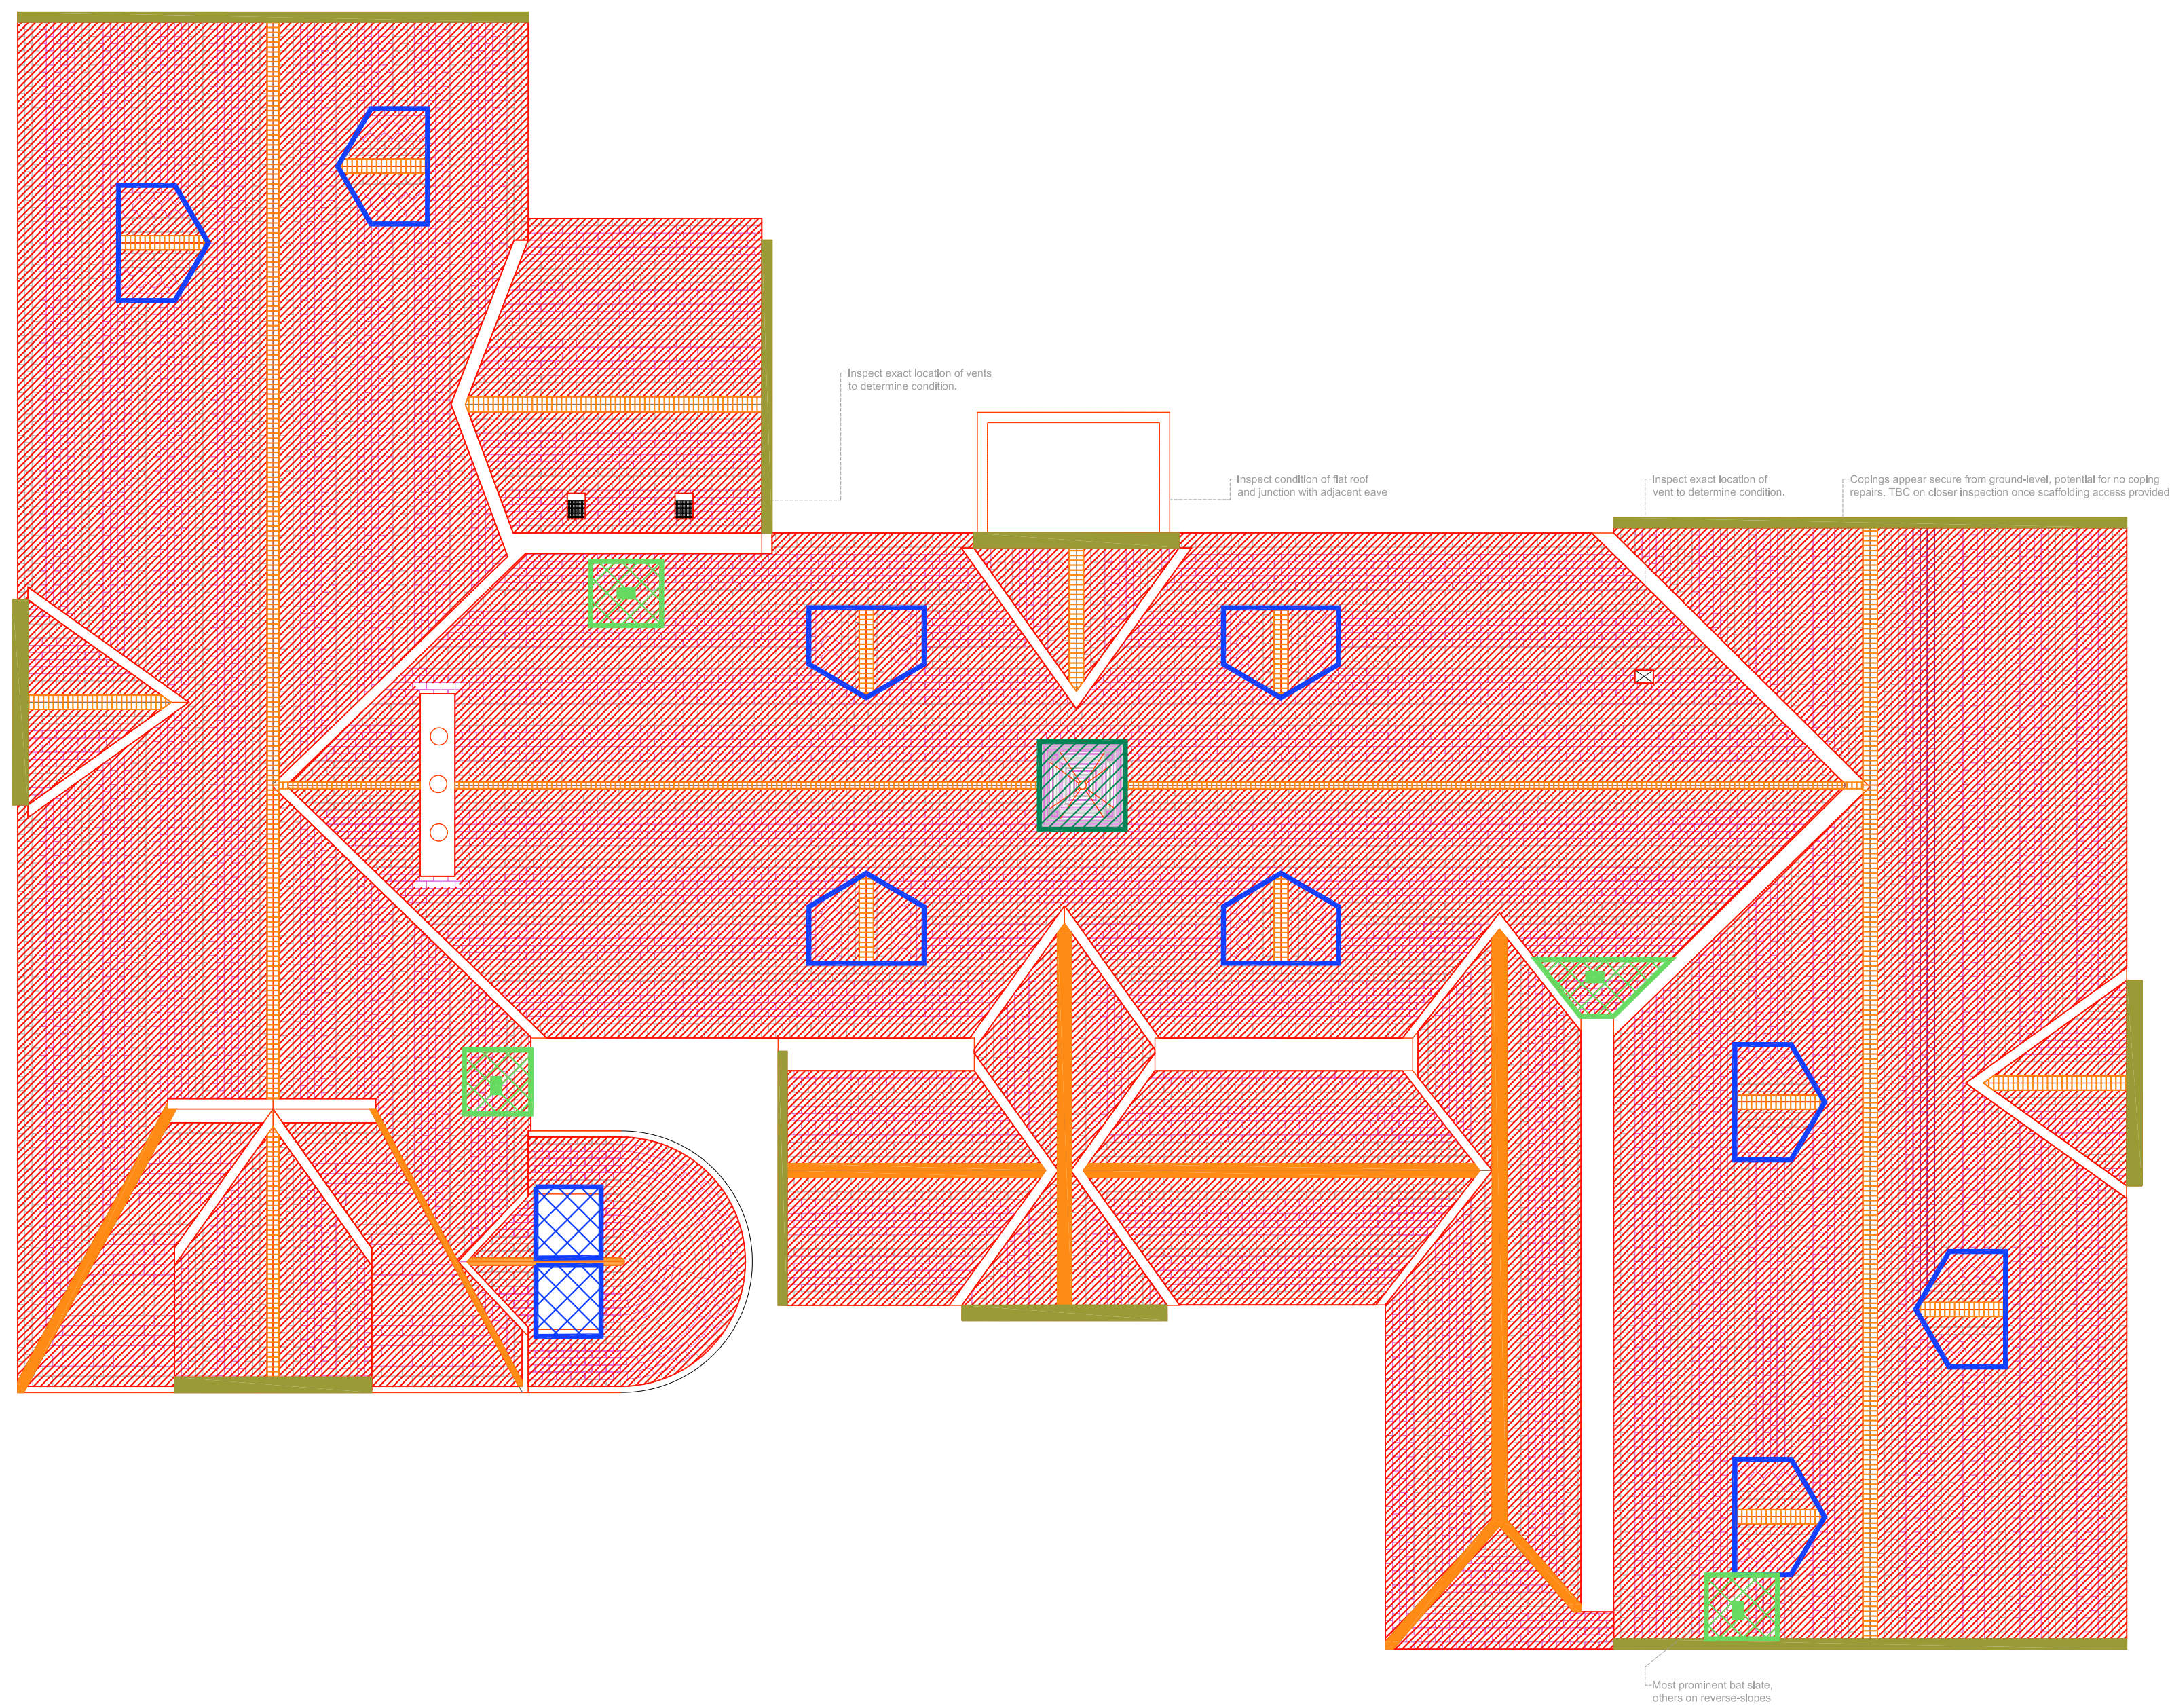

Key:

-  **Roof Slate Restoration:** 762sqm / 8220sqft
Strip existing slate roof coverings and set aside salvaged slates for re-use. Strip existing battens, felt, lead-lined gutters and gutter structure then safely dispose of any defective material. Re-felt & batten existing roof slope. As per detail A-A in drawing SMP-SEV-XX-XX-DR-A-03100 (Typical Roof Built-Up)

 **Dormer Window:** 09 no.
Splice in new timbers where appropriate. Access to be provided for detailed inspection and methodology agreed. Carefully sand down and repaint in appropriate materials as per the specification. Roofing section per detail F-F in drawing SMP-SEV-XX-XX-DR-A-03105 (Typical Dormer Window)

 **Cupola:** 01 no.
Splice in new timbers where appropriate. Access to be provided for detailed inspection and methodology agreed. Carefully sand down and repaint in appropriate materials as per the specification. Cupola roofing is as per the building's other slate roof eaves, but is at a steeper gradient (assume larger area than in plan).

 **Decorative Ridge Tiles:** 105 Lm
Ridge tiles to be removed and set aside with salvaged tiles for re-use.
Replace damaged tiles as per the existing style. Ridge ventilation provided with new linear vent.
Ridge venting per detail F-F in drawing SMP-SEV-XX-XX-DR-A-03105 (Typical Dormer Window)

 **Flat Ridge Tiles:** 50 Lm
Ridge tiles to be removed and set aside with salvaged tiles for re-use.
Replace damaged tiles like-for-like.

 **Stone Capping:**
Take up and re-bed any loose or damaged existing stone capping places and re-point. Ensure appropriate stiff mortar (NHL 3.5 Lime Mortar) applied to capping sections. Ensure that new capping pieces be required; sample cappings to be provided to ensure secure structure.

 **Non-Gabled Dormer Windows:**
‘Shed Dormer’ windows with flat felt topping. Splice in new timbers where appropriate. Access to be provided for detailed inspection and methodology agreed. Carefully sand down and repaint in appropriate materials as per the specification. Remove felt and re-top with terne-coated stainless steel (TCSS) with a round-batten seam to match Historic England (HE) Guidelines.

 **Slate Tiles:**
Grey and Grey-Purple slate tiles.
To be relocated in the same location/pattern as existing, with photographic records used to ensure consistency. Methodology to be agreed with Conservation Officer regarding relocation of any slates.

 **Bat Slate:** [Dashed Hatch Approx. Location. Solid Hatch Exact Location]
Integrated Bat access state: metal vent to allow access for bats into roof void, with sufficient gap cut into roof structure underneath. Fitted within a hole cut to slate which is placed over the vent to reduce visual impact. 1no. Bat Slate located in area of observed bat emergence (west wing of the building, facing north, adjacent to Dormer D2) and then 3no. supplementary ‘enhancement slates’ along remaining gables (north, east, south).

REVISIONS | C01 FIRST_ISSUE

19/08/24 SM SGI
DATE; DRAWN; CHECK

CLIENT	Rochdale Borough Council
PROJECT	SMP - St Mary's CE Primary School
TITLE	Roof - Fabric Repair Plan
NUMBER	SMP-SEV-XX-R1-DR-A-02012
REVISION	C01
STATUS	Construction
SCALE	1:50 @A1
DATE	19/08/24
DRAWN BY	SM
CHECKED BY	SGi

seven.

SEVENARCHITECTURE.CO.UK

Studios at :
Unit 1.3, Waulk Mill, 51 Bengal Street,
MANCHESTER, M4 6LN
t : 0161 236 5655

Clarendon House, Victoria Avenue,
HARROGATE, HG1 1DY
t : 01423 709 807

24 Groville Street,
LONDON, EC1N 6SS
t : 0203 036 0691