



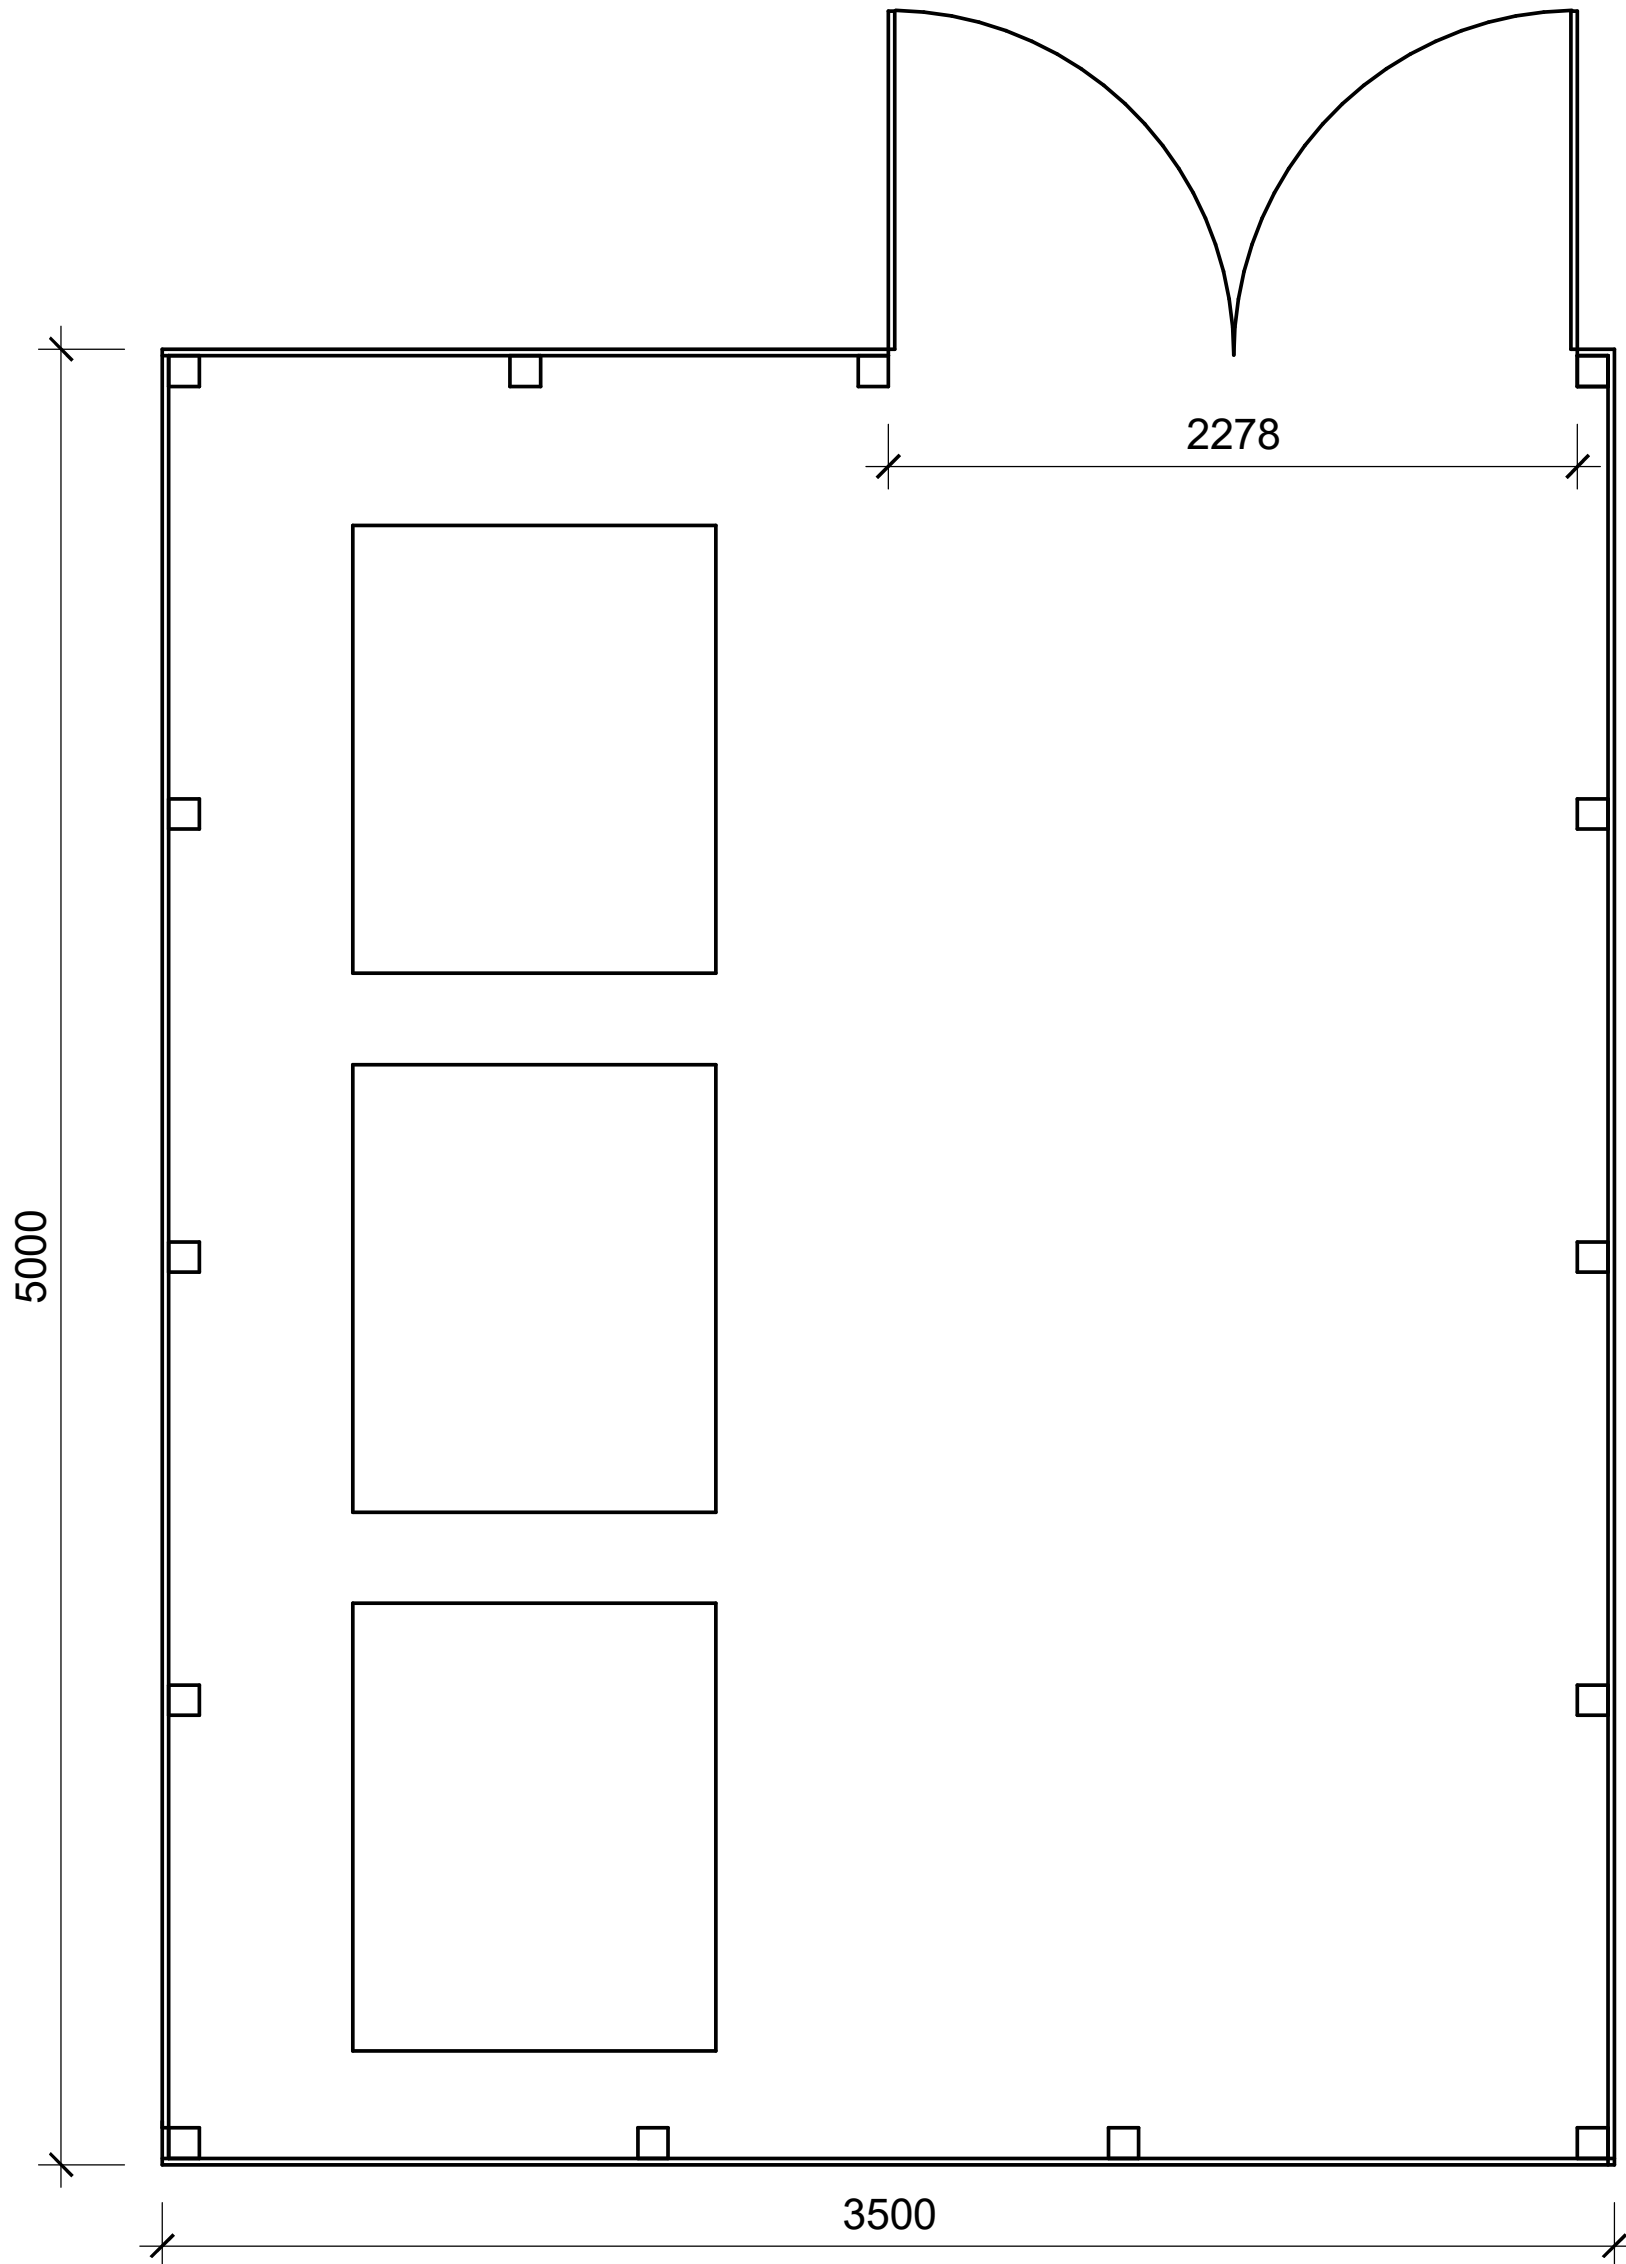

PROPOSED BIN STORE PLAN
1 : 25

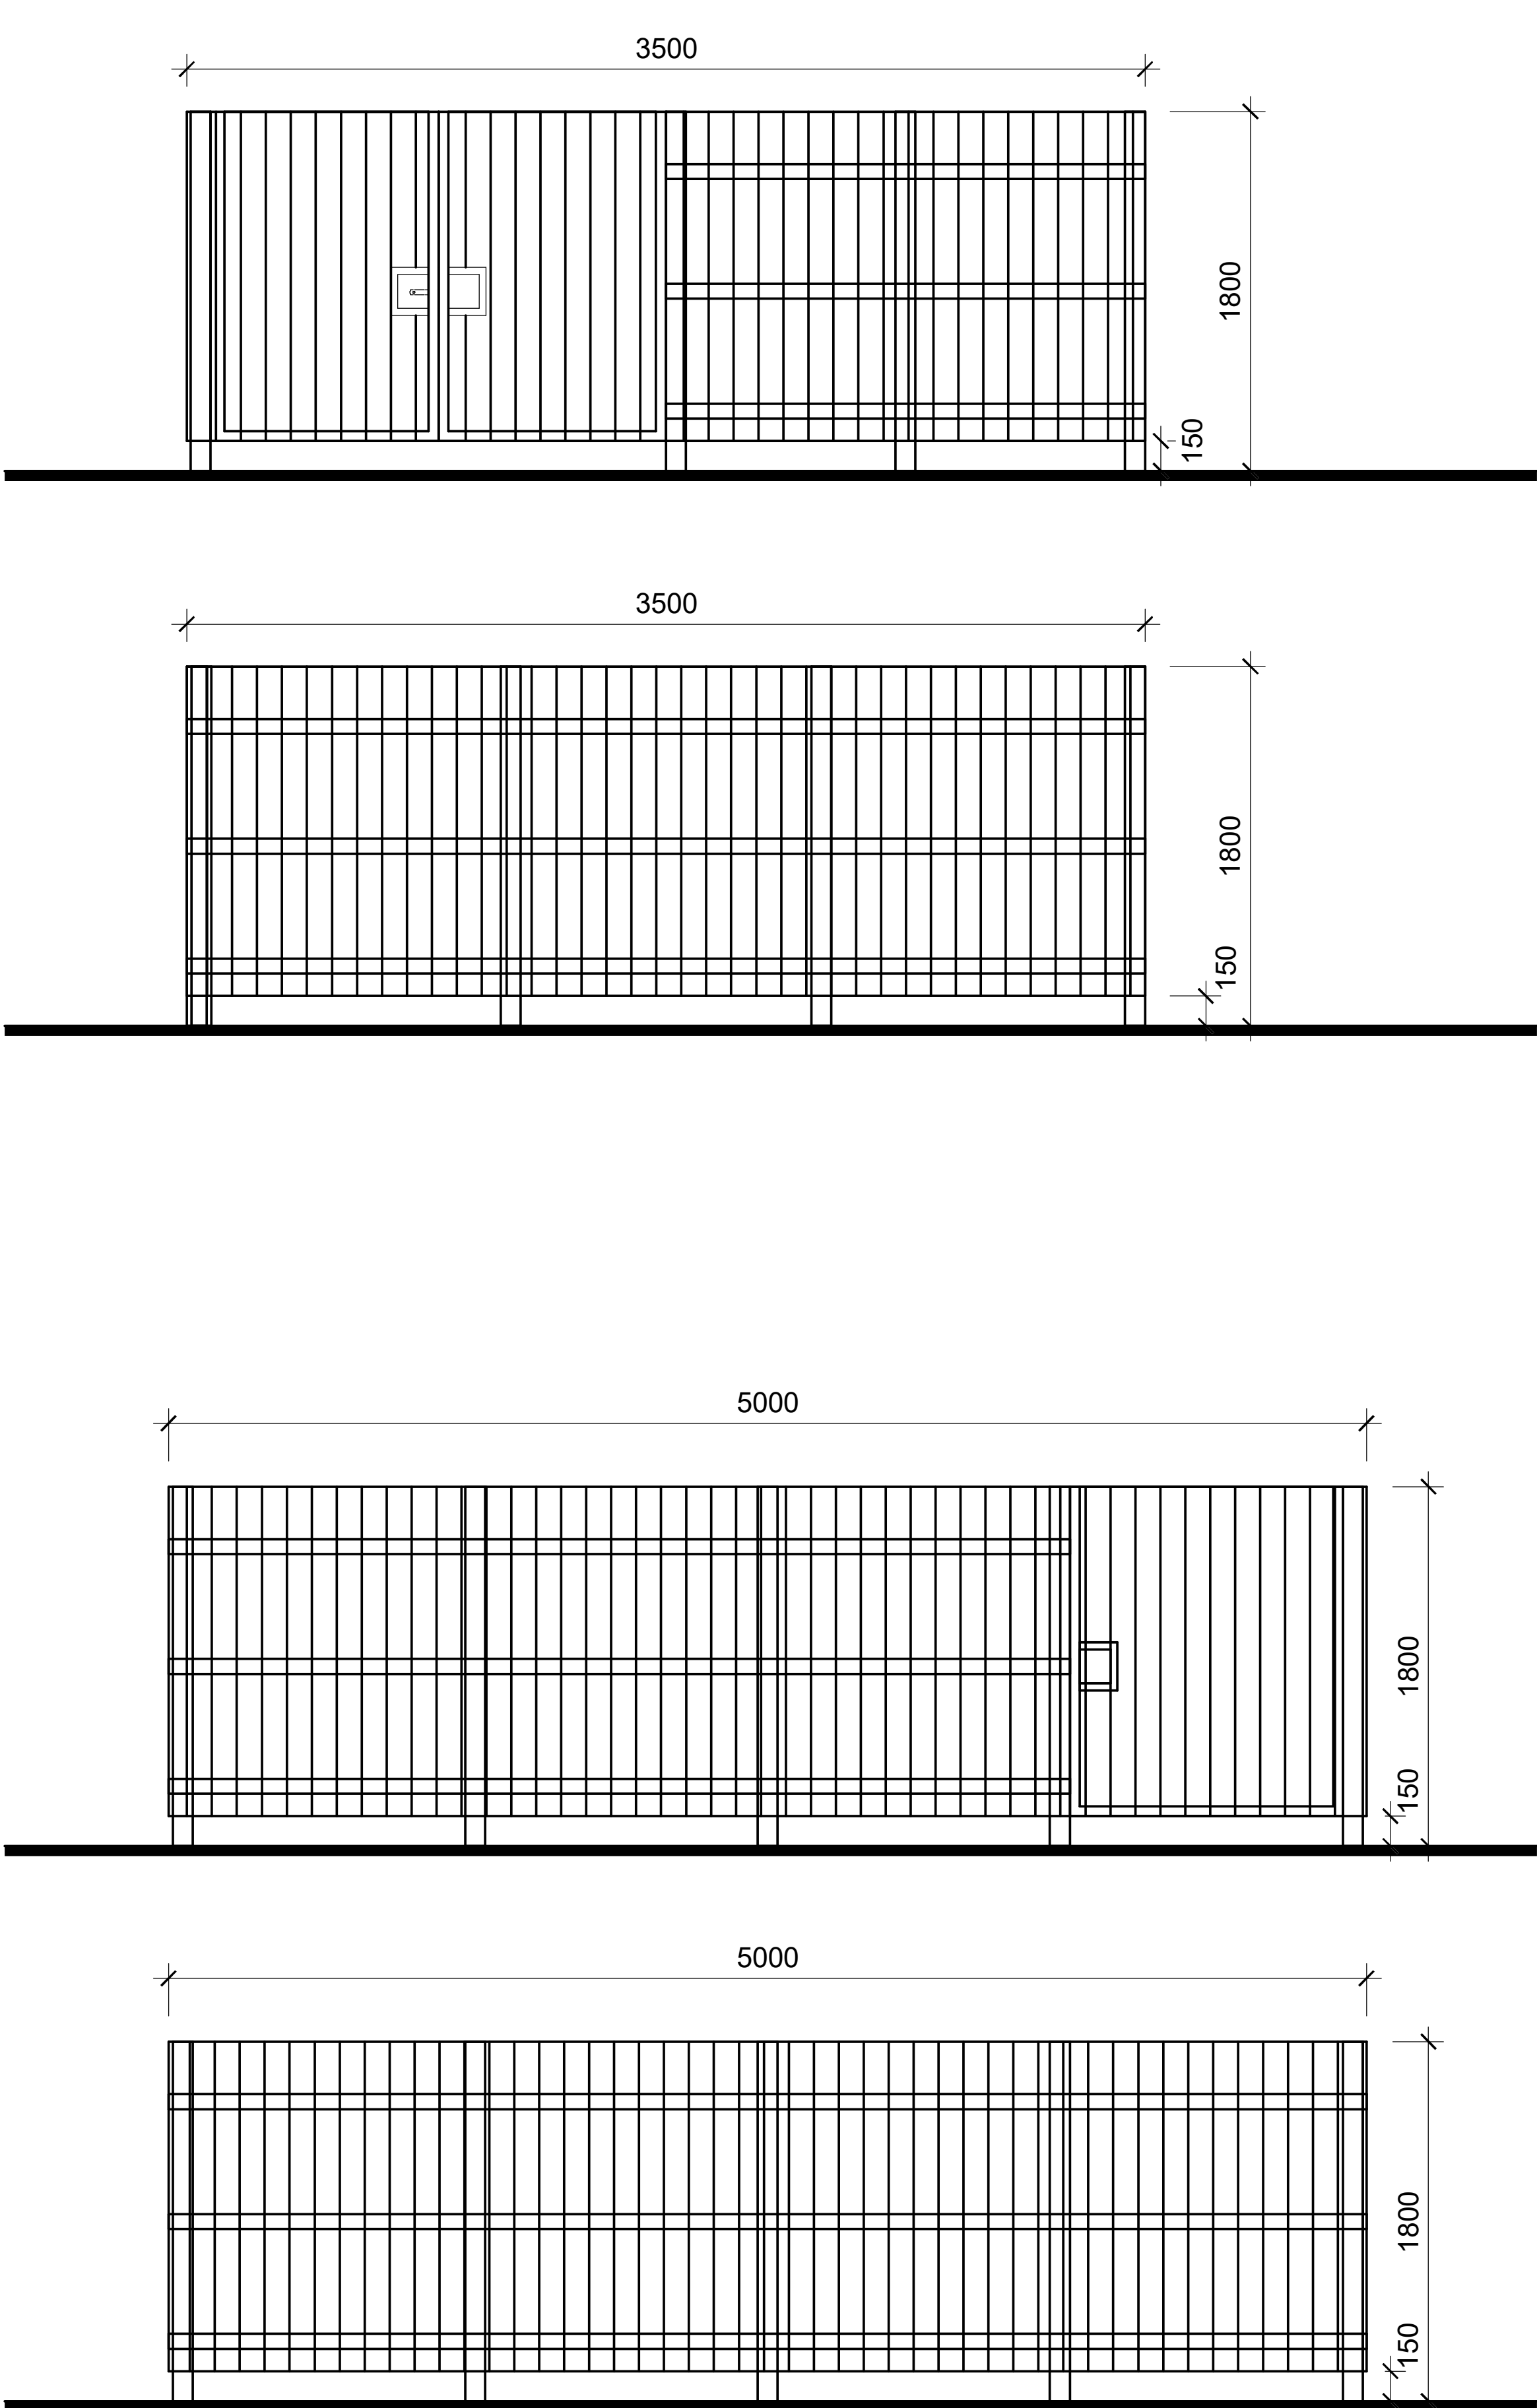

REFUSE ENCLOSURE

to Accommodate 3no 1280ltr EuroBins with 1300mm Clearance Between each Bin for Accessibility.

TREATED TIMBER PALISADE FENCING:

Fencing construction to generally consist of:

- Sawn tanalised (brown) treated soft wood. Timber posts min section size 100x100mm sent into 450mm3 concrete bases.post tops to be sloped to shed water.

- Cross rails (3 no) to be sawn tanalised (brown) treated softwood. min section size 50x100mm. 100x25mm pales to be close butt boarded to full length.

- All fence fixings to be hot dipped galvanised or equal approved.

- Gate posts to be min section size 150x150mm. Sikkens or similar dark stain finish (3 coats) exact shade to be confirmed.

External Plant Enclosure to Match the Above Refuse Storage

Specification. All Sizes & Dimensions to be Confirmed.

0m0.5m1m1.5m2m

VISUAL SCALE 1:25 @ A1

The copyright of this drawing is vested with Studio FRI and must not be copied or reproduced without the consent of the company.

Rev.

Description

Date

Drw.

Chk.

INDICATES SITE BOUNDARY

Client:
VAN BREAKERS ROCHDALE

Project:
IND ESTATE, CORPORATION RD,
OL11 4JB

Drawing Title:
PROPOSED BIN STORE PLAN

Drawing Status:
PLANNING

STUDIO FRI ARCHITECTURE + PLANNING

T: 01772 915868 E: info@studiofri.co.uk W: www.studiofri.co.uk

Drawing No.
25-010.005

Revision

Drawn
II

Checked
II

Paper Size
A1

Scale
1 : 25

Date
16.05.25