
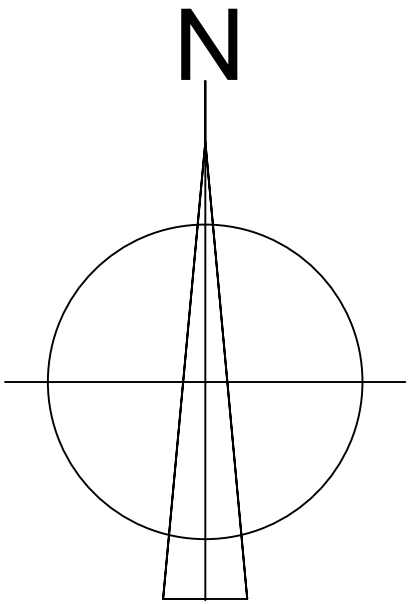





Delivery and stacking
For large areas, turf shall be delivered at appropriate intervals throughout the work so as to avoid stacking for long periods.


MAINTENANCE
All maintenance to be carried out up to handover to the adopting authority householder from the date of planting and turfing to ensure successful establishment. All dead, diseased, damaged plants must be replaced during this time unless the local Planning Authority states, in writing, any variation to this.

Abbreviation	Species	Pot Size	Density	Number of Plants
Amo	<i>Alchemilla mollis</i>	3L	6/m ²	5 -
HELORMS	<i>Helleborus orientalis</i> 'Maroon Shades'	3L	6/m ²	18 -
HOSTH	<i>Hosta</i> 'Thomas Hogg'	3L	6/m ²	16 -
				Total :39 -

- | | |
|--|---|
|  | Existing trees/vegetation |
|  | Proposed tree planting |
|  | Proposed hedge planting |
|  | Proposed ornamental shrub planting |
|  | Grass - turf |
|  | Decorative golden gravel over weedproof membrane |
|  | Paving, Marshalls Fairstone Limestone Aluri in rustic ochre or similar approved. |
|  | Resin bound recycled rubber. Addaflex- R available from Addagrip (Addagrip.co.uk). Colour to be agreed. |
|  | Dry stone wall |
|  | Retaining wall to Architects detail |



No dimension to be scaled from this drawing		Date		Rev	Dwn
© Copyright reserved					

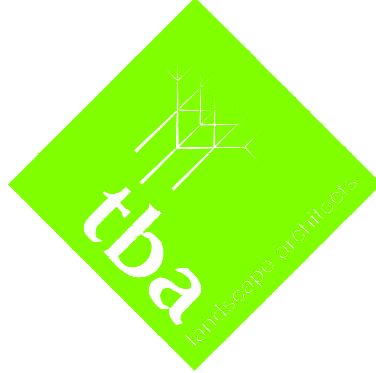

Landscape Architecture

Trevor Bridge Associates Ltd
 Ashton Old Baths
 Stamford Street West
 Ashton-under-Lyne
 Lancs OL6 7FW

Tel: 0161-604 2099
 E-mail: info@trevorbridge.co.uk

Project					
LONGLEY HEY FARM, LITTLEBOROUGH					
MR AND MRS SLICKER					
Title					
LANDSCAPE PROPOSALS					

Date	Scale(s)	Dwg no	Rev
March 26	1:200	7872.01	
Dwn	@ A1		
JW	Chkd		