14:51 4G
marley.co.uk

Edgemere interlocking slate was selected as an aesthetically pleasing and practical roofing solution which would complement the natural look of the log homes.

The main centre used 6,800 Edgemere slates, with the smaller manager's home requiring approximately 2,300 slates in total.

ABBOTSWOOD PARK
CASE STUDY

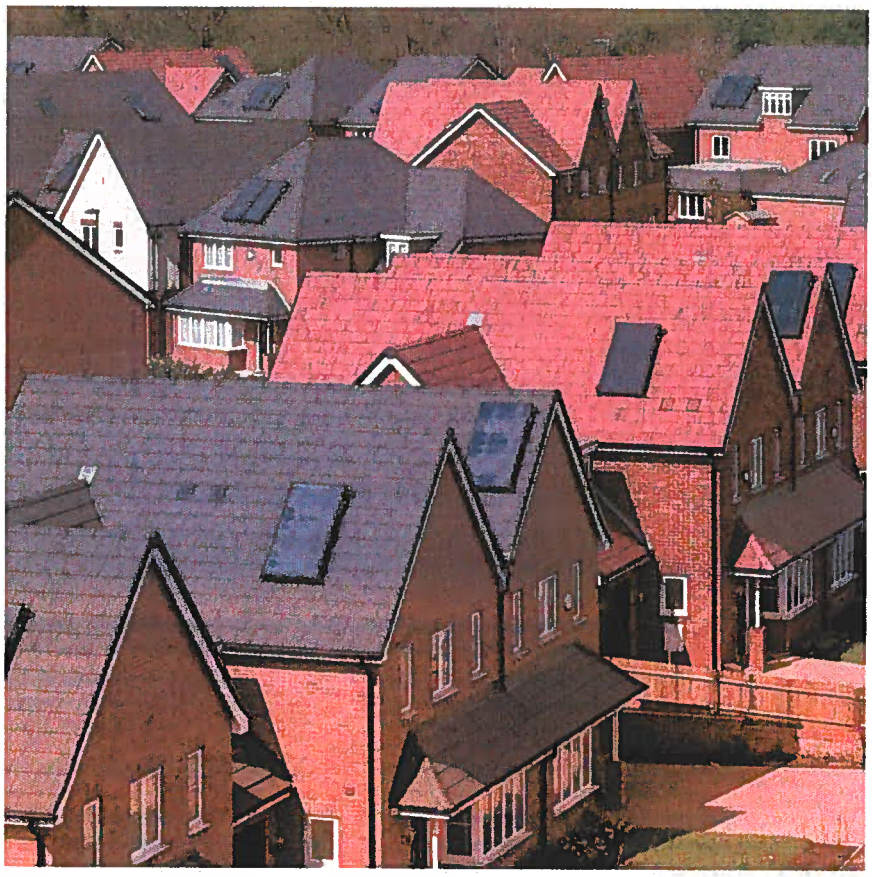

Edgemere was the ideal choice for the roof with its thin leading edge, giving the appearance of natural slate at a more cost effective price. We received excellent technical support from Marley and we're really pleased with the end result.

ADAM WATTS, TECHNICAL DIRECTOR, BELLWAY HOMES

14:50 4G

marley.co.uk

(fixed to BS 5534)

Fixings	Slate nails (45 x 1.35mm)
Fixing clips	Eaves, verge and tile clips
	EN 490

10 of 20

Which can may be influenced by special circumstances, please Service

Key (3) Broken bond

1. Edgemere and Rivon Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses.
2. Duo Edgemere should be laid a quarter broken bond. The required broken bond pattern is created by the introduction of three quarter width slates, cut from standard slates on site to form verge slates in alternate courses.

SUSTAINABILITY

Green guide rating	A+ (Element refs. 812410007, 812410018, 812410049)
BES 6001	Excellent
Embodied carbon	Low carbon footprint of 10.67 CO_2e m²

PINE VIEW
CASE STUDY

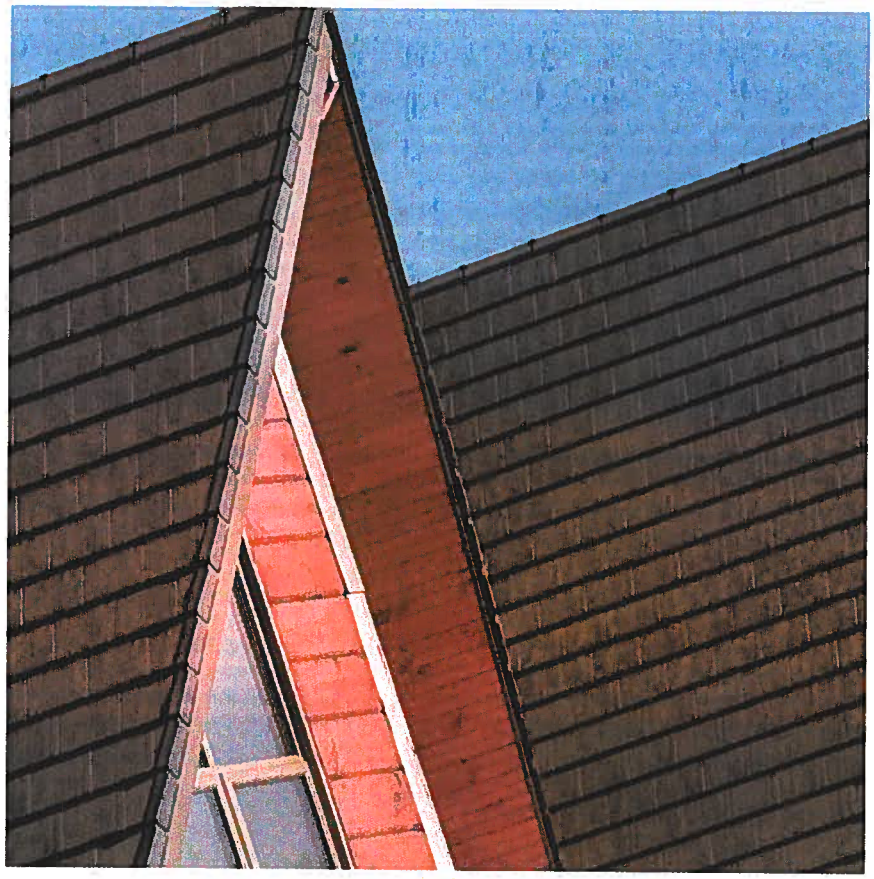

The natural look of the slate tile

