

Sign Type F

Fascia Signs




For Illustration purposes only
Sign Type F
Illumination by **EITHER** external overhead trough
or internal light tray.

A flexface solution is also available

Sign Type F1 - Construction details

Typical Elevation

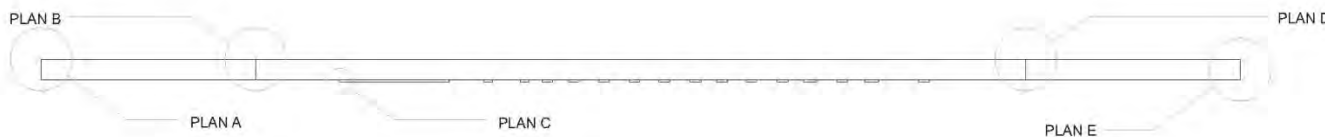

CRUSH FOLDED ALUMINIUM TOP INFILL FULL LENGTH POWDER COATED RAL 7012
INFILLS ARE TO BE PRODUCED 200MM HIGH TO FIT ALL SCENARIOS.

THE ONLY EXCEPTION WOULD BE ON FASCIAS OVER 1200MM HIGH, IN WHICH CASE
A LARGER 'SPECIAL' INFILL WOULD BE REQUIRED (SITE SPECIFIC).

SPECIAL FOLDED
14G ALUMINIUM
FIXING RAILS
FINISHED RED
RAL 3020

16G ALUMINIUM LIGHT UNIT
FINISHED RED RAL 3020
WITH 20MM FOAMEX END
CAPS FINISHED RED 3020

Sign to be illuminated by
Tetra Max 2471 LED system

For information regarding
the quantity of units to be
fitted in each sign type, please
refer to Tridonic's specifications.

3MM OPAL 030 DIFFUSER
20MM LONG SPACE TUBES
FINISHED RED TO MATCH
RAL 3020


8mm OPAL 050
ACRYLIC STEP
INLAID WITH
2mm SHOULDER

ALUMINIUM
FULL LENGTH
FIXING RAILS
POWDER COATED
TO MATCH RED
RAL 3020.

NOTE: Light troughs to be sleeved at joints
to eliminate light spillage and water ingress

Dome head screws
Powder Coated to
match panels.

Sign Type F1 - Standard sizes & setting out

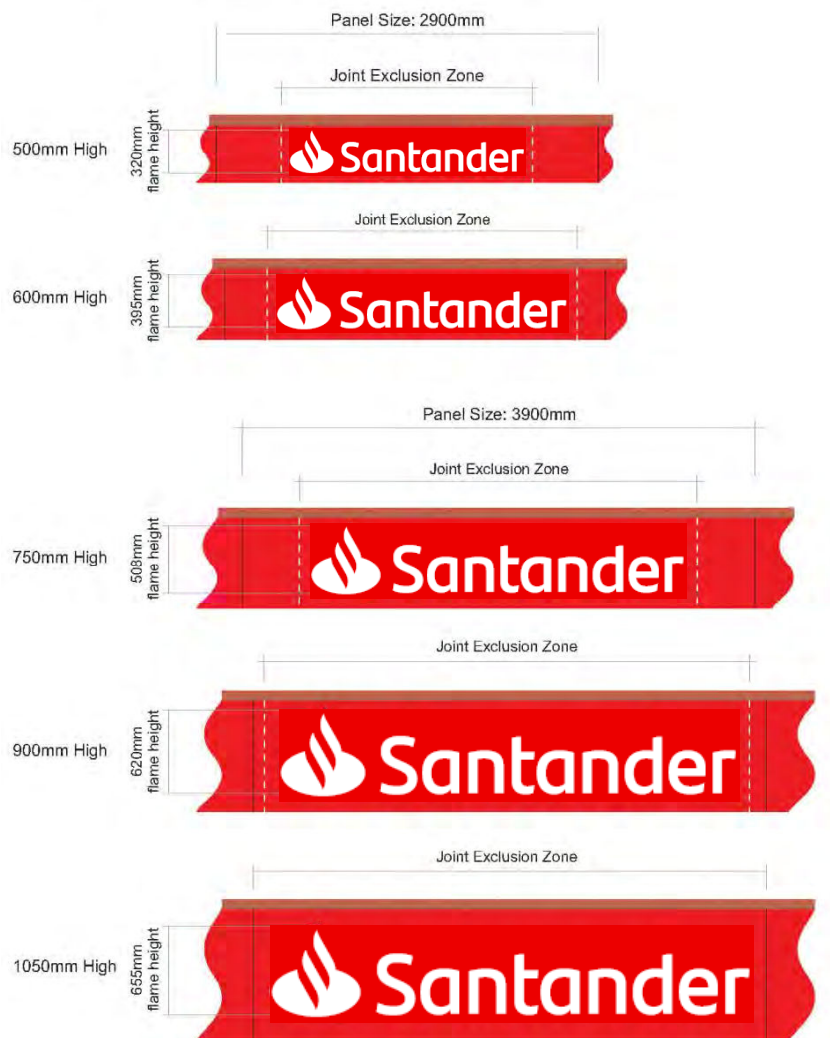

NOTE: The 1050mm high version does not include any panel joints. Reduce the height of the flame logo to 655mm to fit standard material sheet size. This increases the amount of red above and below the logo equally.

This page contains examples showing how each size variation may be produced from standard size material. The dashed white lines indicate the minimum panel size (the joint exclusion zone) according to the guidelines stated previously.

There are 5 standard fascia panel heights: 500mm - 600mm - 750mm - 900mm - 1050mm. All fascias must have the full logo and text contained within a single panel without panel joints.

Due to the fact there are physical material restraints when producing signage from aluminium sheet (such as the standard sizes of sheet material), the larger height aluminium fascia sign (1050mm) should contain a slightly reduced size logo to that shown in the lock-down guidelines, with additional red space above and below the logo.

Fascia panels up to 900mm high to be from 14sgw aluminium, suitably stiffened. Panels over 900mm to be from 10swg aluminium, suitably stiffened.

How Panel Heights are determined:

The panel height is interpreted as the FACE of the panel. The upstand (25mm) is in addition to the face, therefore the over-all height of the panel would be larger - i.e. a 500mm fascia would be 525mm over-all.

